



66/80/10

JCS98 U.S. PTO
09/22/99
01/08/99**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

690.2200 PCT/CIP/CI

First Named Inventor or Application Identifier

KENNETH SCHOFIELD, ET AL.

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☒ Specification Total Pages 3. ☒ Drawing(s) (35 USC 113) Total Sheets 4. ☒ Oath or Declaration Total Pages a. ☐ Newly executed (original or copy)b. ☐ Unexecuted for information purposesc. ☒ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).5. ☒ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.6. ☐ Microfiche Computer Program (Appendix)7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)a. ☐ Computer Readable Copyb. ☐ Paper Copy (identical to computer copy)c. ☐ Statement verifying identity of above copies**ACCOMPANYING APPLICATION PARTS**8. ☐ Assignment Papers (cover sheet & document(s))9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)10. ☐ English Translation Document (if applicable)11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations12. ☐ Preliminary Amendment13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)16. ☒ Other: Letter Transmitting Corrected Drawings w/six (6)
sheets of drawings

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. 08/478,093**18. CORRESPONDENCE ADDRESS**☒ Customer Number or Bar Code Label05514
(Insert Customer No. or Attach bar code label here)or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	1 -20 =	0	X \$ 18.00 =	\$0.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	1 -3 =	0	X \$ 78.00 =	\$0.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$0.00
				BASIC FEE (37 CFR 1.16(a))	\$760.00
			Total of above Calculations =		\$760.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$760.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$ 760.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments, charge any deficiencies or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	RICHARD P. BAUER, REG. NO. 31,588
SIGNATURE	
DATE	JANUARY 8, 1999

F501\W173185\dew

- 1 -

TITLE

AUTOMATIC REARVIEW MIRROR, VEHICLE LIGHTING CONTROL
AND VEHICLE INTERIOR MONITORING SYSTEM
5 USING A PHOTSENSOR ARRAY

This application is a continuation-in-part of co-
pending International Patent Application No.
PCT/US94/01954, which designates the United States and
10 which was filed February 25, 1994 and which is a
continuation-in-part of co-pending U.S. Patent
Application Ser. No. 08/023,918, filed Feb. 26, 1993

BACKGROUND OF THE INVENTION

15

Field of the Invention

This invention relates to an automatic rearview mirror
system for automotive vehicles which automatically
20 changes reflectance level in response to glare causing
light, and more particularly relates to an improved
automatic rearview mirror system using only a
rearwardly facing sensor. This invention further
relates to an automatic rearview mirror and vehicle
25 interior monitoring system for automotive vehicles
which also monitors a vehicle interior or compartment.
This invention further relates to an automatic rearview
mirror and vehicle interior monitoring system for

automotive vehicles which may also be used as a vehicle intrusion detection system or as a compartment image data storage system. This invention further relates to an automatic rearview mirror and a vehicle lighting
5 control system using an image sensor, such as a photosensor array.

Description of Related Art

10 Automatic rearview mirrors and mirror systems have been devised for varying the reflectance level of a variable reflectance rearview mirror by reducing the reflectance automatically in response to annoying glare light, as
15 seen rearwardly of the rearview mirror or mirrors by a driver of the vehicle, and by increasing automatically the reflectance to a normal or maximum reflectance level when the annoying glare light subsides. These automatic mirrors have been changed over the years in an effort to improve their performance characteristics
20 and associated level of glare protection.

Early automatic rearview mirrors used a rearwardly facing sensor and control circuit to change mirror reflectance. One example of such a "single-sensor"
25 type mirror is described in U.S. Patent No. 4,266,856. In these prior art single-sensor type mirrors, the rear glare light was incident on a rearwardly facing sensor or photocell, such as a photodiode, photoresistor or phototransistor. These mirrors suffered from various
30 problems, however, including the problem that these mirrors would become increasingly sensitive and even "lock-up" in their minimum reflectance level or state as the driver encountered significantly higher light levels in town or city driving. This required the
35 driver to repeatedly adjust the mirror's sensitivity control to prevent such problems.

To overcome the problems of single-sensor type mirrors, a non-rearwardly facing photocell for sensing "ambient" light was added. It was believed that the desired reflectance necessary to relieve the driver from glare depended not only on glare light but also on ambient light. Accordingly, these "two-sensor" type mirrors used two separate photocells, one generally facing rearwardly and one generally facing forwardly (or other non-rearwardly facing direction) of the mirror or vehicle. The signals from these two photocells were then compared in some fashion, and when, for example, the glare light from the rear was comparatively high with respect to the "ambient" light, a control circuit would apply a control signal to reduce mirror reflectance. Some examples are described in German Laid-Open Patent No. 3,041,692; Japanese Laid-Open Patent No. 58-19941; and U.S. Patents Nos. 3,601,614; 3,612,666; 3,680,951; 3,746,430; 4,443,057; 4,580,875; 4,690,508; and 4,917,477. In many of these prior art automatic rearview mirrors, light generally forward of the mirror or vehicle was incident on the second photocell.

These arrangements, however, also had problems. In some of these mirrors the forwardly facing or "ambient" light sensor was inaccurate because it did not correctly measure ambient light levels since it did not include light generally rearward of the mirror or vehicle. Some examples include the devices described in U.S. Patent Nos. 4,443,057 and 4,917,477. Other prior art devices overcame these deficiencies by providing a control circuit which correctly measured ambient light as a combination of both the forward and rear light levels. Examples of this significantly different approach are described in U.S. Patent Nos. 4,793,690 and 4,886,960.

The prior art two-sensor type systems generally provided improved performance over prior art single-sensor type systems but were also more complex and costly. In part, this was because using separate
5 forwardly and rearwardly facing photocells required that the performance characteristics of the two separate photocells, such as photoresistors, be matched appropriately to ensure consistent performance under various operating conditions. Matching photocells such
10 as photoresistors, however, generally involves complex, expensive and time consuming operations and procedures.

Both the prior art single-sensor and two-sensor type mirrors presented additional problems when they were
15 also used to control the exterior side view mirrors. This is because such prior art systems used a common control or drive signal to change the reflectance level of both the interior rearview mirror and the exterior left and/or right side view mirrors by substantially
20 the same amount. In U.S. Patent No. 4,669,826, for example, a single-sensor type mirror system used two rearwardly facing photodiodes to control both an interior rearview mirror and the left and/or right side view mirrors based on the direction of incident light
25 from the rear. Another example includes the two-sensor type system described in U.S. Patent No. 4,917,477.

In rearview mirror systems, however, each of the interior rearview and exterior side view mirrors may
30 reflect different source light levels. More specifically, the inside rearview mirror, left side view mirror and right side view mirror each enable the driver to view a different portion or zone of the total rearward area. Of course, there may be some overlap of
35 the image information contained in each of the three zones. The situation is further complicated with multi-lane traffic because each of the mirrors reflects

5

15

25

35

5 rearview mirror system of high reliability and low
cost, which accurately determines light levels that the
driver will experience as glare, and which can control
independently the reflectance of a plurality of mirrors
according to the light levels actually reflected by
10 each of the rearview and exterior side view mirrors
without the need for additional and separate rearwardly
facing photocells. There is also a need for an
automatic rearview mirror system that can independently
control the segments of a variable reflectance mirror
15 while accurately determining light levels that the
driver will experience as glare in each segment of the
mirror without the need for additional and separate
forwardly and rearwardly facing photocells.

20 One concern with automatic rearview mirror systems, as well as other systems having sensing, control or logic circuits located in the rearview mirror, is that differences in vehicle design and mirror field of view requirements may result in rearview mirrors having a
25 variety of appearances (or finishes), forms (or shapes) and sizes. These variations generally require the re-design and re-tooling of a number of the components or sub-assemblies of the rearview mirror head assembly. However, it is generally desirable to reduce the number
30 of components or sub-assemblies of the rearview mirror head assembly so as to reduce cost, product development lead time and manufacturing complexity. To achieve this in automatic rearview mirrors, as well as other systems having sensing, control or logic circuits
35 located in the rearview mirror, it is desirable to locate the sensing, control or logic circuits and related components in a housing or module, which is

attached, connected, made integral with or otherwise associated with the rearview mirror mounting bracket means or structure so that a common design of a mounting bracket sub-assembly for a rearview mirror may
5 be used with a variety of rearview mirror head assemblies.

Vehicle lighting systems may include a variety of vehicle lights, including low intensity peripheral or
10 side lights that allow other vehicle drivers to see the vehicle in lower light conditions, high intensity headlights that operate in a low beam mode or a high beam mode for general night driving, and fog lights that provide low ground lighting with less back
15 scattering to improve the driver's views in adverse weather conditions, such as fog, rain and snow. Vehicle lighting systems may also include headlights having an intermediate or mid beam mode, as well as the low and high beam modes. Vehicle lighting systems may
20 also include vehicle running lights, which are vehicle headlights that are operated at an appropriate intensity to improve the ability of other vehicle drivers to see the vehicle during the day. Vehicle running lights may also be used for lower lighting
25 conditions, such as certain adverse weather conditions or other lower visibility conditions.

Thus, as the number of vehicle lighting options has increased, it has become more complex for the driver to
30 determine the appropriate vehicle lighting configuration and to operate or control the vehicle lighting systems. Therefore, improved vehicle lighting control systems are required that may operate with other systems, such as automatic rearview mirror
35 systems and vehicle interior monitoring systems, or as stand-alone systems.

Finally, unauthorized vehicle intrusion for the purpose of stealing the vehicle or its contents is a significant problem. Each year, automotive manufacturers are including vehicle anti-theft or

5 intrusion detection systems on more vehicles to deter potential intruders and to prevent the theft of vehicles or their contents. Currently known vehicle anti-theft systems are generally designed to protect the vehicle or its contents from theft or vandalism.

10 There are many versions of vehicle anti-theft systems using various sensor technologies that attempt to deter theft or vandalism using the horn, siren or flashing lights, or other alarm mechanisms to bring attention to a vehicle. As is known, existing intrusion detection

15 systems for vehicles use sensor technologies that have various limitations, including the problem of false triggering. For example, in many cases active vehicle alarms are simply ignored by people who assume that the alarm was falsely triggered. The proliferation of

20 separate automatic rearview mirror systems and vehicle intrusion detection systems is also costly. Therefore, vehicle intrusion detection systems using an improved sensor technology are required that operate in combination with other vehicle systems (such as

25 automatic rearview mirror systems) or that operate independently.

Even with such anti-theft systems, recovered stolen vehicles typically provide little or no evidence of the

30 vehicle thief. Therefore, systems are required that provide an image of the vehicle thief that would be useful to law enforcement and the insurance industry as an aid in identifying the person(s) responsible for the vehicle theft, and that operate in combination with

35 other vehicle systems (such as automotive rearview mirror systems) or that operate independently.

SUMMARY OF THE INVENTION

It is an object of the present invention to overcome the problems of the prior art.

5

It is another object of the present invention to provide an automatic rearview mirror system of improved reliability.

- 10 It is yet another object of the present invention to provide an automatic rearview mirror system that accurately determines light levels that the driver will experience as glare without the need for a separate forward facing sensor or other non-rearwardly facing
15 photocells.

- It is another object of the present invention to provide an automatic rearview mirror system of high reliability that accurately determines light levels
20 that the driver will experience as glare, and which can independently control a plurality of mirrors or mirror segments according to different fields of view without the need for additional and separate rearwardly facing photocells.

25

- According to one aspect of the present invention, using a photosensor array and an appropriate control circuit allows the elimination of separate forwardly facing or other non-rearwardly facing photocells, thereby
30 allowing for lower costs and increased reliability since it is not necessary to match two separate photocells such as photoresistors.

- According to another aspect, the present invention
35 which achieves one or more of these objectives relates to a control system for controlling a plurality of variable reflectance mirrors or mirror segments which

change their reflectance in response to a signal from a drive circuit. The system comprises a plurality of variable reflectance mirrors, a photosensor array and a control circuit receiving signals from the photosensor array for controlling the mirrors. The photosensor array is mountable to view rearwardly of the mirror or vehicle. The photosensor array comprises a plurality of sets of photosensor elements corresponding to the plurality of variable reflectance mirrors. The photosensor elements in each set produce a plurality of photosensor element signals in response to light incident thereon. The control circuit determines control signals, indicative of a desired reflectance for each of the plurality of variable reflectance mirrors, in response to receiving photosensor element signals from the photosensor element set for each view or zone corresponding to the rearview mirror and exterior side view mirrors and also (or alternatively) the mirror segments. The control signals control the drive circuit to cause the plurality of variable reflectance mirrors or mirror segments to assume the desired reflectance.

According to another aspect, the present invention which achieves one or more of these objectives relates to an automatic rearview mirror system for an automotive vehicle comprising at least one variable reflectance rearview mirror, and an array of sensing elements to sense light levels in an area rearward of the at least one variable reflectance rearview mirror. Each of the sensing elements is adapted to sense light levels of light incident thereon and to output an electrical signal indicative of the sensed light levels. The system further comprises a signal processor, connected to the array of sensing elements, receiving and using the electrical signals indicative of the sensed light levels from the sensing elements to

668970 "HE 42660

determine a first electrical signal indicative of a background light level in the area rearward of the at least one variable reflectance rearview mirror and to determine a second electrical signal indicative of at least one peak light level in the area rearward of the at least one variable reflectance rearview mirror. The signal processor determines at least one control signal indicative of the desired reflectance level of the at least one variable reflectance rearview mirror from the first electrical signal indicative of the background light level and the second electrical signal indicative of the at least one peak light level. The system further comprises at least one drive circuit connected to the signal processor and to the at least one variable reflectance rearview mirror for receiving the at least one control signal and generating and applying at least one drive signal to the at least one variable reflectance rearview mirror to drive the at least one variable reflectance mirror to the desired reflectance level.

According to another aspect, the present invention which achieves one or more of these objectives relates to a control system for controlling a plurality of variable reflectance mirrors, each of which change their reflectance level in response to a drive signal from an associated drive circuit, for an automotive vehicle. The system comprises a plurality of variable reflectance mirrors, and a photosensor array mountable to face substantially towards a rear area. The photosensor array comprises a plurality of photosensor element sets. Each set comprises a plurality of photosensor elements. Each of the photosensor elements generates a photosensor element signal indicative of a light level of light incident thereon, and each of the sets corresponds to one of the plurality of variable reflectance mirrors. The system further comprises a

control circuit, connected to the photosensor array,
for determining and applying a plurality of control
signals. Each of the control signals is indicative of
a desired reflectance level for each of the plurality
5 of variable reflectance mirrors in response to
receiving the photosensor element signals from each of
the plurality of photosensor element sets. The system
further comprises a plurality of drive circuits
connected to the control circuit and to different ones
10 of the plurality of variable reflectance mirrors
associated therewith. Each of the control signals is
output to the drive circuit associated therewith, to
generate and apply a drive signal to each of the
plurality of variable reflectance mirrors causing each
15 of the mirrors to assume a desired reflectance level.

According to another aspect, the present invention
which achieves one or more of these objectives relates
to a control system for controlling at least one
20 variable reflectance mirror for an automotive vehicle.
The system comprises photosensor array means for
sensing light levels in an area rearward of the at
least one variable reflectance mirror and generating
photosensor array signals, means for determining a
25 background light signal from the photosensor array
signals, means for determining a peak light signal from
the photosensor array signals, and means for
controlling a reflectance level of the at least one
variable reflectance mirror using the background and
30 peak light signals.

According to another aspect, the present invention
which achieves one or more of these objectives relates
to a method of controlling the reflectance of at least
35 one variable reflectance mirror comprising the steps of
sensing light levels in an area rearward of the at
least one variable reflectance mirror with an array of

sensing elements, determining a background light level from the sensed light levels, determining a peak light level from the sensed light levels, and controlling a reflectance level of the at least one variable
5 reflectance mirror using the determined background and peak light levels.

By using a plurality of photosensor element sets or sub-arrays on a photosensor array to control a
10 plurality of mirrors and also (or alternatively) mirror segments, the mirrors may be controlled independently to vary their reflectance in accordance with the view associated with each of the photosensor element sets or sub-arrays.

15 According to another aspect the present relates to an automatic rearview mirror system for an automotive vehicle comprising a variable reflectance rearview mirror, a photosensor array means for sensing light
20 levels in an area rearward of said variable reflectance rearview mirror and for generating photosensor array signals, a signal processing means for receiving said photosensor array signals and for determining from said photosensor array signals a signal for controlling said
25 variable reflectance rearview mirror, and a mounting bracket means for attaching said variable reflectance rearview mirror to said automotive vehicle, said mounting bracket means further comprising a housing means for housing said photosensor array means and said
30 signal processing means.

According to another aspect the present relates to a vehicle lighting control system for controlling a vehicle lighting system in an automotive vehicle
35 comprising a photosensor array means for sensing light levels in a forward field of view and generating a set of photosensor array signals, and a signal processing

means coupled to said photosensor array means for receiving said set of photosensor array signals and determining from said set of photosensor array signals at least one control signal for controlling said
5 vehicle lighting system.

According to another aspect, the present invention relates to a control system for monitoring a vehicle interior and for controlling at least one variable
10 reflectance mirror for an automotive vehicle. The system comprises photosensor array means for sensing light levels in an area rearward of said photosensor array means and generating at least a first set of photosensor array signals, first determining means
15 coupled to said photosensor array means for receiving said at least a first set of photosensor array signals and determining from at least a portion of said at least a first set of photosensor array signals a first signal for controlling said at least one variable
20 reflectance mirror, second determining means coupled to said photosensor array means for receiving said at least a first set of photosensor array signals and determining at least a first set of values indicative of said at least a portion of said at least a first set
25 of photosensor array signals, and memory means coupled to said second determining means for receiving and storing said at least a portion of said at least a first set of photosensor array signals.

30 According to another aspect, the present invention relates to a vehicle intrusion detection system for detecting movement within a vehicle interior for an automotive vehicle. The system comprises photosensor array means for sensing light levels in an area
35 including at least a portion of a vehicle interior and generating at least a first set and a second set of photosensor array signals, determining means coupled to

5 said photosensor array means for receiving said at
least a first set and a second set of photosensor array
signals and determining at least a first set and a
second set of values indicative of said at least a
first set and a second set of photosensor array
signals, and comparing means coupled to said
determining means for receiving said at least a first
set and a second set of values indicative of said at
least a first set and a second set of photosensor array
10 signals and comparing said at least a first set and a
second set of values to generate at least one output
control signal indicative of the correlation between
said at least a first set and a second set of values.

15 According to another aspect, the present invention
relates to a compartment image data storage system for
an automotive vehicle. The system comprises
photosensor array means for sensing light levels in at
least a portion of a vehicle compartment and generating
20 at least a first set of photosensor array signals,
determining means coupled to said photosensor array
means for receiving said at least a first set of
photosensor array signals and determining at least a
first set of values indicative of said at least a first
25 set of photosensor array signals, and memory means
coupled to said determining means for receiving and
storing said at least a first set of values indicative
of said at least a first set of photosensor array
signals.

30 These and other objects, advantages and features of the
present invention will be readily understood and
appreciated with reference to the detailed description
of preferred embodiments discussed below together with
35 the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1A is a drawing of an automatic rearview mirror of the present invention, including an expanded view of a rearwardly facing photosensor array located in the upper center area of the mirror surface;

Figure 1B is another drawing of an automatic rearview mirror of the present invention, including an expanded view of the rearwardly facing photosensor array alternatively located in a bezel or chin of the mirror;

Figure 1C is a diagram of an automatic rearview mirror of the present invention, in which the photosensor array and logic and control circuit are located in a housing or module that is attached, connected, made integral or otherwise associated with the rearview mirror mounting bracket structure;

Figure 1D is a side sectional view of the automatic rearview mirror of Fig. 1C;

Figure 2 is a drawing of an automotive vehicle with the automatic rearview mirror system of the present invention;

Figure 2A is an illustrative diagram of a rearward area of a vehicle interior as viewed by the photosensor elements of the photosensor array for monitoring the vehicle interior;

Figures 3A and 3B are illustrative diagrams of a rearward area as viewed by the photosensor elements of the photosensor array;

Figure 4A is a generalized diagram of a photosensor array $PA(N,M)$ having a sub-array $S(X)$;

Figure 4B is a generalized diagram of the photosensor array PA(N,M) and sub-arrays S(0), S(1), S(2) and S(3);

Figure 5 is another schematic diagram of the
5 photosensor array commonly located on a light sensing and logic circuit;

Figure 6 is a schematic block diagram of the automatic rearview mirror system;

10

Figure 6A is a schematic block diagram of the automatic rearview mirror and vehicle interior monitoring system;

Figure 6B is a schematic block diagram of a vehicle
15 lighting control system having a photosensor array that has a forward field of view;

Figure 7 is a flow chart illustrating the method of the present invention for controlling the reflectance of a
20 rearview mirror or mirrors;

Figures 8A and 8B are detailed flow charts for steps S150, S160 and S180 of Fig. 7;

25 Figure 9 is a flow chart of the general logic flow of Figs. 7, 8A and 8B for controlling the reflectance of three mirrors;

Figure 10 is another schematic block diagram of the
30 automatic rearview mirror system of the present invention;

668070-1124260

Figure 10A is a schematic block diagram of the automatic rearview mirror and/or vehicle interior monitoring system of the present invention;

- 5 Figure 11A illustrates the normalized spectral response of the photosensor array made using a non-epitaxial silicon process;

- 10 Figure 11B illustrates the normalized spectral response of the photosensor array made using an epitaxial silicon process;

- 15 Figure 12 is a flow chart illustrating the method of the present invention of the vehicle interior monitoring system;

- 20 Figure 12A is a flow chart illustrating the method of the present invention for a vehicle intrusion detection system configuration of the vehicle interior monitoring system of Fig. 12;

- 25 Figure 12B is a flow chart illustrating the method of the present invention for the compartment image data storage system configuration of the vehicle interior monitoring system of Fig. 12; and

- 30 Figures 13A, 13B, 13C and 13D are flow charts illustrating the method of the present invention for controlling a vehicle lighting system.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENT

I. The Automatic Rearview Mirror System

35

Figure 1A illustrates an automatic rearview mirror 1 comprising a variable reflectance mirror element 1a and

a single rearwardly facing photosensor 2. The
photosensor 2 is mounted facing rearwardly of the
rearview mirror 1 so that its field of view encompasses
an area comprising a rear window area and at least a
5 portion of either or both side window areas. Also
shown is a switch 3 to allow a driver to manually
control several possible mirror functions, such as an
on-off control switch, a sensitivity adjustment and a
force-to-day or a force-to-night switch (i.e., forced
10 maximum or minimum reflectance levels, respectively).
An expanded view of the photosensor 2, which is
preferably located in an upper center area of the
variable reflectance mirror element 1a as shown, shows
a light sensing and logic circuit 26 comprising a
15 photosensor array 32 and a logic and control circuit 34
(which is not shown in Fig. 1A but is shown in Figure 6
as discussed below). A photosensitive surface of each
of the photosensor elements 32a (shown in Fig. 5) of
the photosensor array 32 senses light levels or image
20 information in a predetermined field of view
encompassing an area located rearwardly of the rearview
mirror 1. A lens 30 images or otherwise focuses the
light information from the predetermined field of view
onto the photosensor array 32.

25 The rearview mirror 1 further comprises a channel mount
1b or other mounting means used to fixedly attach the
mirror 1 to the windshield or headliner area of the
vehicle. The rearview mirror 1 is generally adjustable
30 with respect to the channel mount 1b to allow a driver
to position the mirror for correct viewing of the
rearward area or scene so that the driver's sightline
through the rearview mirror 1 is aligned approximately
with the vehicle's centerline.

35 Preferably, the photosensor 2 is fixedly mounted on the
adjustable portion of the rearview mirror 1 as shown in

both Figs. 1A and 1B so that the viewing axis of the
photosensor 2 is generally aligned with the viewing
axis of the mirror 1 which is perpendicular to the
glass surface of the mirror 1. This approach is
5 preferable both because of packaging concerns and
because it provides a guaranteed sightline. It is,
however, within the scope of the present invention to
mount the photosensor array 32 so that it is movable
with respect to the variable reflectance mirror element
10 1a of the rearview mirror 1.

More preferably, as shown in Fig. 1A, the photosensor 2
is located in the upper center area of the variable
reflectance mirror element 1a. This may be required,
15 for example, if it is necessary to reduce the bezel
size of the rearview mirror 1. If the photosensor 2 is
located behind a glass surface of the variable
reflectance mirror element 1a, an appropriately sized
hole is provided in the protective and reflective
20 materials of the variable reflectance mirror element
1a. Additionally, a corresponding area within an
active layer of the variable reflectance mirror element
1a may be removed or otherwise rendered inactive to
enable the photosensor 2 to view directly the rearward
25 scene. Alternatively, for manufacturing reasons, the
photosensor 2 may view the rearward scene through the
active layer of the variable reflectance mirror element
1a, in which case it is preferable to compensate for or
otherwise negate the effects of reducing reflectance
30 and correspondingly the transmittance of the variable
reflectance mirror element 1a so that the photosensor 2
effectively views the rearward scene directly as will
be described later.

35 Most preferably, a reflective surface is maintained
within the hole to both preserve the cosmetic
appearance of the assembly as viewed by the driver and

to maximize the reflective surface. This can be achieved by providing a very thin metal reflective layer (100 Å thickness or lower) of aluminum, stainless steel, chromium, or silver, etc., so as to be

5 sufficiently transmitting for incident light to enable proper operation of the photosensor array 32 but also sufficiently reflective to appear mirror-like in the area of the hole. Alternatively, a reflective tape, which is both sufficiently transmitting and reflective

10 to achieve the objectives described herein, may be adhered at the hole region using suitable means such as an optical adhesive and the photosensor array 32 may then be mounted behind the optical adhesive.

Additionally, thin film stacks such as a solid state

15 tri-layer of $\frac{1}{4}$ wave TiO_2 , $\frac{1}{4}$ wave SiO_2 and $\frac{1}{4}$ wave TiO_2 or some other single thin film of a high index material may be mounted behind or coated upon the area of the hole. Finally, since the preferred photosensor array 32 is responsive to both visible light and near

20 infrared, it is preferable to select a material which reflects a significant proportion of visible light while being essentially transparent to infrared.

As shown in Figure 1B, the photosensor 2 may also be

25 located in the bezel or chin of the rearview mirror 1 to view the rearward area directly without any compensation. In another preferred embodiment, the photosensor 2 may also be located on or near the channel mount or mounting bracket 1b so that the axis

30 of the photosensor 2, which is perpendicular to the plane of the photosensor array 32, is in fixed alignment with the vehicle's centerline regardless of the adjusted position of the rearview mirror 1.

35 In particular, as shown in Figures 1C and 1D, a sensing and logic circuit assembly 27, which comprises a sensing and logic circuit 26 and the photosensor 2 and

switch 3 on a printed circuit board, is located in a housing or module 7 that is attached, connected, made integral or otherwise associated with the rearview mirror 1. In the embodiment shown in Figs. 1C and 1D, a mounting bracket 6 is fixed relative to the headliner area of the vehicle body in a header mount arrangement; and a rearview mirror head assembly 1h is adjusted by a spherical pivot 6d at the interface of the mounting bracket 6 and the rearview mirror head assembly 1h.

10 The mounting bracket 6 may also be releasably attached to a mounting button (not shown) that is attached to the windshield to provide generally improved ease of assembly and replacement, as well as safety. Alternatively, the mounting bracket 6 may be attached

15 to the windshield or headliner area of the vehicle by any of the various means well known to those skilled in the art.

In particular, the mounting bracket 6 comprises a retaining spring 6a, a retaining screw 6b, a wire harness opening 6c for receiving a wire harness assembly 8, and a spherical pivot 6d having an opening for wires 6e that are used to control the variable reflectance mirror element 1a. The housing or module 7

20 comprises a retaining housing or module 7a for partially mounting the sensing and logic circuit assembly 27, a rear housing or module cover 7b, a heat sink 7c for the sensing and logic circuit assembly 27, a screw 7d for securing the heat sink 7c to the mirror

25 bracket 6, and a wire connector 7e for connecting the harness assembly 8 and wires 6e to the sensing and control circuit assembly 27. The harness assembly 8 is used, in part, to supply power to the sensing and logic circuit assembly 27.

35

Also, as shown in Figs. 1C and 1D, the automatic rearview mirror 1 comprises the variable reflectance

mirror element 1a, a mirror cushion support 1c, an impact absorber layer 1d, a bezel 1e, a mirror case 1f and clamp springs 1g for receiving and securing the spherical pivot 6d of the mounting bracket 6.

5

For other vehicles, such as trucks, the photosensor 2 may also be located with each of the external side view mirrors as will be described later.

10 The lens 30 is preferably a single molded plastic lens approximately 2 millimeters in diameter and is preferably bonded to or in close contact with the photosensor array 32. The lens 30 may, however, include any appropriate image focusing means such as
15 conventional single component optics, holographic lens type optics, binary optics or a microlens. The lens 30 preferably is also designed to focus an image of the rearward scene within a field of view defined by a cone. The cone's centerline is perpendicular to the
20 plane of the photosensor array 32 and the cone preferably has an included angle of approximately 100 degrees. Thus, the image is focused onto a circular area of the plane of the photosensor array 32. Of course, the photosensor array 32 could be positioned in
25 other than a rearwardly facing direction so long as appropriate lenses or other optics are used to direct the light or image information from the rearward area onto the photosensitive surface of the photosensor array 32.

30

The pre-positioning of the photosensor array 32 in the rearview mirror 1 depends on whether the automatic rearview mirror system 20 is being used in a left hand or a right hand drive vehicle. In either case, the
35 photosensor array 32 is preferably pre-positioned within the circular area of the focused image so that for either a left or right hand drive vehicle and with

only driver adjustment of the rearview mirror 1, the rearward scene imaged onto the photosensitive surface of the photosensor array 32 includes the rear window area and at least a portion of the left and right side window areas of the vehicle.

If a sufficiently large photosensor array 32 is used, then the pre-positioning of the photosensor array 32 is not vehicle specific as described above, and a system 20 using a larger photosensor array 32 may be used for both left and right hand drive vehicles. The larger photosensor array 32 is positioned symmetrically within the circular area of the focused image described above. Using the larger photosensor array 32 involves using a pattern recognition means to determine the approximate vehicle centerline so that the appropriate portion of the larger photosensor array 32 may be selected depending on whether the automatic rearview mirror system 20 is installed in a left or right hand drive vehicle.

Figure 2 illustrates an automatic rearview mirror system 20 for an automotive vehicle, comprising the rearview mirror 1, a left side view mirror 4 and a right side view mirror 5. As will be discussed below, either or both of the side view mirrors 4 and 5 may be connected to a control circuit of the rearview mirror 1. The mirrors 1, 4 and 5 may be constructed according to any of the methods known to those skilled in the art and are generally constructed according to the styling preferences and specifications of the automotive vehicle manufacturers. The means for mounting the rearview mirror 1, such as the channel mount 1b, and the electrical connectors used to connect the mirrors 4 and 5 to the control circuit of the rearview mirror 1 and the vehicle's electrical system may include any one of the many configurations known to those having

ordinary skill in the art. The variable reflectance mirror element 1a of the mirrors 1, 4 and 5 may be any device having more than one reflectance level corresponding to a specific control or drive signal.

- 5 Preferably, however, the variable reflectance mirror element 1a is an electrochromic mirror.

As discussed, the photosensor 2 is mounted facing rearwardly of the rearview mirror 1 so that its field
10 of view encompasses an area comprising the rear window area and at least a portion of both the left side window area and the right side window area. The horizontal and vertical fields of view of the rearward area as seen by the photosensor 2, and more
15 particularly by the photosensor array 32, are illustratively shown in Figures 3A and 3B.

As shown in Fig. 3A, the photosensor array 32 senses a field of view divided into three separate zones: a
20 center zone a, a left zone b (generally corresponding to the left side window area) and a right zone c (generally corresponding to the right side window area). Each zone is sensed by a separate set or sub-array S(X) of photosensor elements 32a (described
25 with respect to Figs. 4A and 4B) within the photosensor array 32. The center zone, zone a, generally receives light from the rear window area of the vehicle. This rear window area is depicted by a trapezoidally shaped rear window figure superimposed on a first set or sub-
30 array S(1) of photosensor elements 32a used to sense light levels in zone a. Zone b includes light from at least a portion of a left side window area. This is depicted by a trapezoidally shaped left rear side window figure and a partially shown left front side
35 window figure superimposed on a second set or sub-array S(2) of photosensor elements 32a used to sense light levels in zone b. Similarly, zone c includes light

from at least a portion of a right side window area. This is depicted by a trapezoidally shaped right rear side window figure and a partially shown right front side window figure superimposed on a third set or sub-
5 array S(3) of photosensor elements 32a used to sense light levels in zone c. Additionally, all three zones include light reflected from whatever fixed body work and interior trim, head rests, vehicle occupants or other objects that are within the zones a, b and c.

10

Also as illustratively shown in Fig. 3A, the photosensor elements 32a in columns 1 to 4 comprise the third photosensor element set in zone c, the
15 photosensor elements 32a in columns 6-11 comprise the first photosensor element set in zone a and the photosensor elements 32a in columns 13 to 16 comprise the second photosensor element set in zone b. Null zones are provided between the zones a and b and between the zones a and c to allow for driver
20 adjustment of the rearview mirror 1. These null zones also ensure that the center zone a does not include light or other image information from the side window areas of zones b and c.

25 As will be discussed in more detail below, the logic and control circuit 34 selects photosensor element signals from the first photosensor element set or sub-array S(1) (shown in Fig. 4B) corresponding to zone a to control the reflectance level of the rearview mirror
30 1. Similarly, the control circuit 34 selects photosensor element signals from the second photosensor element set or sub-array S(2) (shown in Fig. 4B) corresponding to zone b to control the reflectance level of the left side view mirror 4, and further
35 selects photosensor element signals from the third photosensor element set or sub-array S(3) (shown in Fig. 4B) corresponding to zone c to control the

- reflectance level of the right side view mirror 5. Additionally, for a variable reflectance mirror element 1a having segments, such as a center, left and right segment, appropriately defined zones a, b and c, i.e., sub-arrays S(1), S(2) and S(3), corresponding to the mirror segments may be used by the logic and control circuit 34 to control independently the individual mirror segments.
- Figure 3B illustratively shows the preferred embodiment for the zones of the photosensor array 32. In this embodiment, the logic and control circuit 34 selects photosensor element signals from three overlapping sets or sub-arrays S(1), S(2) and S(3) of photosensor elements 32a corresponding to the three overlapping zones a, b and c to control, respectively, the reflectance level of the mirrors 1, 4 and 5. More specifically, the control circuit 34 selects photosensor element signals from the photosensor elements 32a in columns 6 to 11 (zone a) to control the reflectance level of the rearview mirror 1. The control circuit 34 also selects photosensor element signals from photosensor elements 32a in columns 10 to 14 (zone b) to control the reflectance level of the left side view mirror 4, and further selects photosensor element signals from photosensor elements 32a in columns 3 to 7 (zone c) to control the reflectance level of the right side view mirror 5.
- Additionally, in the Fig. 3B embodiment, the lens 30 focuses or images light information from: (1) the rear window area onto zone a; (2) at least a portion of the rear window and left side window areas onto zone b; and (3) at least a portion of the rear window and right side window areas onto zone c. Contrastingly, in the Fig. 3A embodiment, the lens 30 focuses light from: (1) the rear window area onto zone a; (2) the left side

5 window area onto zone b; and (3) the right side window
area onto zone c. The overlapping zones in the Fig. 3B
embodiment are advantageous because each set of
overlapping photosensor elements 32a in zones a and b
5 and each set of overlapping photosensor elements 32a in
zones a and c, as well as the logic and control circuit
34, is able to "preview" the light information that
may, for example, first appear in the rear window area
(and correspondingly in the rearview mirror 1), but
10 which may appear shortly thereafter in the left or
right side view mirrors 4 and 5. By examining at least
a portion of the rear window area, the automatic
rearview mirror system 20 is able to more quickly
respond to annoying glare light from approaching
15 vehicles or other sources. Overlapping zones are also
generally preferred because a glare light source
located in a common or overlapping area of the rearview
mirror 1 and one of the side view mirrors 4 or 5 can
influence both mirrors.

20

II. The Light Sensing Device

The light sensing device of the light sensing and logic
circuit 26 is preferably the photosensor array 32 shown
25 in Fig. 5. The photosensor array 32 has sufficient
resolution to view the real image of a scene but may
also use a spatial distribution of light intensities as
an approximation of the imaged scene. An example of
such a photosensor array 32 is the VLSI Vision Limited
30 (VVL) Single Chip Video Camera Model #ASIS 1011.

Since a photosensor array 32 of the type described,
namely the VVL Single Chip Video Camera, is capable of
providing image information having sufficient
35 resolution for displaying an actual image or for some
other purpose, it will be readily understood that
additional features or functions may be incorporated by

adding circuitry to provide video output from the
photosensor array 32 in addition to the primary control
functions described herein. For example, the video
output may be output to a CRT, flat LC panel display or
5 other appropriate display device, located within the
vehicle, to provide a display of the imaged scene for
viewing by the driver.

The photosensor array 32 may be located in any of the
10 mirrors 28 or in any other appropriate location,
whether local or remote, such as on the vehicle's rear
bumper, thereby extending significantly the effective
field of view normally available to the driver either
directly or through the vehicle's mirrors 28.
15 Additionally, the photosensor array 32 may even replace
one or more of the side view mirrors 4 and 5 of the
automatic rearview mirror system 20, thereby reducing
the aerodynamic drag on the vehicle while providing
sufficient information to the driver comparable to that
20 available through the side view mirrors 4 and 5.

A video signal from the photosensor array 32 may also
be used by the logic and control circuit 34 to
determine the presence of a vehicle or other object
25 within the field of view of the photosensor array 32 to
provide a visual signal warning such as through a
display panel, or even an audible warning, based on
certain parameters, such as distance and speed of the
object. Additionally, if the photosensor array 32 is
30 located in the rearview mirror 1, the video signal may
be used to monitor the vehicle's interior to detect
unauthorized intrusion into the vehicle. This may be
achieved by providing electrical power to the mirror's
logic and control circuit 34 from a vehicle power
35 supply and by activating a vehicle intrusion monitoring
mode when a signal indicates that the vehicle's door
and trunk locks have been activated. The logic and

control circuit 34 may be used to continuously monitor the image from the vehicle's interior thereby allowing detection of objects or persons moving within the vehicle, and if movement is detected, another signal
5 from the logic and control circuit 34 may then activate an intrusion alarm.

Thus, the photosensor array 32 may be used to monitor the vehicle interior or compartment in a vehicle
10 interior monitoring system. This monitoring capability may be used in a vehicle intrusion detection system or in a compartment image data storage system, either in combination with the automatic rearview mirror system or as an independent system. Using the photosensor
15 array 32 to monitor the vehicle interior to detect potential intruders provides an effective vehicle intrusion detection system. In an automatic rearview mirror and vehicle intrusion detection system, the photosensor array 32 in the rearview mirror 1 provides
20 a good location for monitoring the vehicle interior because the rearview mirror 1 is: (1) centrally located along the vehicle axis; (2) forward of the front seat; and (3) relatively high in the vehicle interior. This location is sufficiently high and far forward so as to
25 provide a very good view of the vehicle interior, including the front and rear seat areas, front and rear door areas and hatchback or rear cargo door areas. The photosensor array 32 may also be positioned in other locations, including the headliner and headliner
30 console areas, for example, or any other appropriate location depending on the particular application.

As is discussed later, when the vehicle interior monitoring system is used as a vehicle intrusion
35 detection system, the logic and control circuit 34 processes image data to detect motion or movement in the vehicle interior, establishes an intrusion

66374 "THE 2260

condition if such motion is detected and outputs one or more control signals to vehicle hardware or to a vehicle controller system. Vehicles today are often equipped with such controller systems. These vehicle
5 controller systems may be used to control the exterior lights, interior lights, horn (or siren), ignition or other such vehicle hardware. The logic and control circuit 34 therefore outputs one or more control
10 signals to various vehicle hardware or to the vehicle controller system to activate the interior and exterior lights, horn or siren or to disable the ignition to deter intruders from stealing the vehicle or its contents. Other control output signals may activate RF beacon devices or similar devices within the vehicle so
15 that the vehicle may be tracked, as will be further described later.

It is, however, within the scope of the present invention for the light sensing device to comprise any
20 similarly appropriate image or array sensor. When the light sensing and logic circuit 26 is formed as a very-large-scale-integrated (VLSI) complementary-metal-oxide-semiconductor (CMOS) device, as is known to those skilled in the art, the light sensing device will share
25 a common semiconductor substrate with the logic and control circuit 34.

Preferably, for the described three mirror system, the photosensor array 32 comprises a plurality of
30 photosensor elements 32a arranged in 160 columns and 40 rows (a 160 x 40 array) providing a horizontal field of view of approximately 100 degrees and a vertical field of view of approximately 30 degrees. As discussed, Figs. 3A and 3B illustratively show a 16 x 4
35 photosensor array 32. The photosensor array 32 may, however, comprise any appropriately sized array having an appropriate field of view. For example, the field

of view may be narrower when controlling the segments of only one mirror. Each photosensor element 32a is preferably about 10 microns square.

5 As shown in Figure 4A, the photosensor array 32 generally comprises a plurality of photosensor elements 32a arranged in a photosensor array $PA(N,M)$ having N rows of M columns. When viewing the photosensitive surface of the photosensor array $PA(N,M)$ in a vertical
10 plane, the lower row is row 1, the top row is row N , the left hand column is column 1, and the right hand column is column M . A specific photosensor element is identified as $E(n,m)$ and the signal indicative of a light level incident thereon is $L(n,m)$. Also, the sub-
15 array $S(X)$, where $X = 0, 1, 2, \dots, Z$, is a rectangular array having $P(X)$ rows of $Q(X)$ columns of photosensor elements 32a and is located such that its lower left hand element is photosensor element $E(T(X),U(X))$.

20 As shown in Figure 4B, a background sub-array $S(X)$ designated $S(0)$ is used to determine a general background light level B . Signals from the photosensor elements 32a of each peak sub-array $S(X)$, designated
25 $S(1), S(2), \dots, S(Z)$, are used to determine a peak light level $P(z)$ incident on each peak sub-array $S(1), S(2), \dots, S(Z)$. The general background light level B for background sub-array $S(0)$ and the peak light level $P(z)$ for each peak sub-array $S(X)$ are then used
30 to determine a mirror control signal $V_c(z)$ for controlling at least one mirror or mirror segments associated with each zone.

Figure 5 generally illustrates a logic layout of the
35 photosensor array 32. The logic and control circuit 34 generates array control signals to control the photosensor array 32. As is well known in the art, the

photosensor array 32 is typically accessed in scan-line format, with the array 32 being read as consecutive rows, and within each row as consecutive columns or pixels. Each photosensor element 32a is connected to a common word-line 33e. To access the photosensor array 32, a vertical shift register 33a generates word-line signals for each word-line 33e to enable each row of photosensor elements 32a. Each column of photosensor elements 32a is connected to a bit-line 33f which is connected to a charge-to-voltage amplifier 33c. As each word-line 33e is accessed, a horizontal shift register 33b uses a line 33g to output the bit-line signals on consecutive bit-lines 33f to an output line 33h connected to the logic and control circuit 34. Also shown is a voltage amplifier 33d used to amplify the resulting analog photosensor element signals. The analog photosensor element signals are then output on line 33h to the analog-to-digital converter 44 and converted to digital photosensor element signals.

As discussed above, the photosensor array 32 is responsive to or senses both visible light and near infrared illumination. Figures 11A and 11B illustrate the normalized spectral response for two versions of the preferred photosensor array 32. In Figs. 11A and 11B, visible light generally covers the wavelengths from about 400 nm to about 750 nm, while near infrared illumination or light generally covers the wavelengths from about 750 nm to about 3000 nm (not shown). More particularly, Fig. 11A illustrates the normalized spectral response of the preferred photosensor array 32 made using a non-epitaxial silicon process, where the peak spectral response occurs at about 800 nm. Figure 11B shows the normalized spectral response of the preferred photosensor array 32 made using an epitaxial silicon process, where the peak spectral response occurs at about 650 nm. As shown, the non-epitaxial

silicon photosensor array is more sensitive to near infrared illumination having wavelengths on the order of about 800nm. The photosensor array 32 made using the non-epitaxial silicon process and having the
5 normalized spectral response of Fig. 11A is most preferred in both the particular automatic rearview mirror and vehicle interior monitoring systems described herein. For automatic rearview mirror systems as described herein, this is because vehicle
10 headlights generally provide significant levels of near infrared illumination. For vehicle interior monitoring systems as described herein, either natural sources (such as sunlight) or supplemental sources of near
15 infrared illumination may be used to enhance the image information available to and the performance of such systems, as will be further discussed below.

The field of view and resolution of the photosensor array 32 depends on the number and physical dimensions
20 of the photosensor elements 32a and on the design or geometry of the lens 30. For the lens type illustrated in Fig. 1A, the lens 30 may, for example, be designed to have an included angle on the order of up to about 140°. For the automatic rearview mirror system
25 previously described, the effective field of view of approximately 100° horizontal and approximately 30° vertical is preferred. For the automatic rearview mirror and vehicle interior monitoring system described herein, an effective field of view of approximately
30 100° horizontal and approximately 75° vertical is preferred. Also as discussed for the automatic rearview mirror system, the lens 30 preferably focuses an image within a field of view defined by a cone having an included angle of approximately 100 degrees.
35 Accordingly, when the lens 30 focuses the image onto the focal plane of the 160 x 40 photosensor array 32,

the photosensor array 32 only falls within a segment of the focused image area.

Figure 2A generally illustrates a view of a vehicle interior 100 (which includes the window areas of Figs. 3A and 3B) as focused by the lens 30 and as viewed by a 160 x 120 photosensor array 32. Also shown are a driver or left seat 101, a front passenger or right seat 102, a rear window area 103a, a right side window area 103b and a left side window area 103c. The 160 x 40 photosensor array 32, however, only sees a portion or segment of the vehicle interior 100, as is shown in Figs. 3A and 3B. In a dedicated automatic rearview mirror system, the 160 x 40 sized array is generally preferred since it provides sufficient image information for providing effective automatic rearview mirror control and because it reduces the cost of the photosensor array 32. If the photosensor array 32 is also used to monitor the vehicle interior 100 (or for other applications) as is described herein, then the larger 160 x 120 array size may be used to view the vehicle interior 100 as is generally illustrated in Fig. 2A.

Finally, it should be understood that the spatial resolution of the photosensor array 32 may also be increased. This may be done by making the photosensor elements 32a smaller so as to increase the number of photosensor elements 32a in a photosensor array 32 having the same physical dimensions. Additionally, spatial resolution may be increased by varying the lens 30 to decrease the included angle of the image cone so that the photosensor array 32 views a smaller portion of an image on the vehicle interior 100.

35

In summary, the array size of the photosensor array 32 and the number and physical dimensions of the size of

the photosensor elements 32a and the lens design or geometry of lens 30 may all be varied to optimize the effective field of view of the photosensor array 32 depending on the application.

5

As is discussed later, an exposure time or exposure period EP of the photosensor array 32 may be varied over some range depending on the light level. Thus, the value of EP is increased for decreasing light
10 levels and approaches a maximum for low light levels, and it is decreased for increasing light levels and approaches a minimum for high light levels. For a given value EP_v of the exposure period, there is a light level LL_{MIN} that is sufficiently distinct from low
15 signal noise in the photosensor element signal $L(n,m)$ of each photosensor element $E(n,m)$ so that it may be accurately sensed, and there is also a light level LL_{MAX} for which the photosensor element signal $L(n,m)$ of each photosensor element $E(n,m)$ is a maximum. The ratio of
20 LL_{MAX}/LL_{MIN} at EP_v may be used to represent a dynamic range of $DR(n,m)$ in decibel (dB) units of each photosensor element $E(n,m)$, where $DR(dB) = 10 \text{ LOG } (LL_{MAX}/LL_{MIN})$. The image data is preferably optimized such that it is approximately centered within
25 the dynamic range $DR(N,M)$ of the photosensor array 32. This may be done by determining an array response AR of $RA(N,M)$, which is described later, where the minimum and maximum digital values of AR correspond to the minimum and maximum digital values possible for Val
30 $RA(n,m)$ (e.g., 0 and 255 for 8-bit data resolution). The exposure period is varied or adjusted until AR approaches the center or mid-point of the possible data value range (e.g., 127 for 8-bit data resolution).

35 Since there is a minimum photosensor element signal that may be accurately measured, a supplemental source of illumination may be desirable or necessary to

enhance the effective sensing capabilities of the
photosensor array 32 by providing supplemental source
illumination SSI. Although the photosensor array 32 is
able to monitor the vehicle interior 100 over a range
5 of background lighting levels from about 0.1 lux (a
dark garage) to about 30-60K lux (a bright, sunny day),
using either visible or near infrared SSI to illuminate
the vehicle interior 100 generally (or specific areas
therein) significantly enhances the effectiveness or
10 performance of the photosensor array 32 in various
applications. Also, SSI is preferably provided only
during the exposure period EP of the photosensor array
32 rather than continuously. Pulsed SSI reduces power
consumption, extends the life of the supplemental
15 source of illumination and provides generally higher
instantaneous illumination than may be provided by
continuous illumination. Also, pulsed infrared SSI is
generally more difficult to detect by infrared
illumination sensing apparatus that may be used by
20 potential intruders.

For the specific vehicle interior monitoring system
applications described herein, near infrared
illumination between about 700 and 1200 nm is preferred
25 because: (1) it is visible to the photosensor array 32
but not to the human eye (see Figs. 11A and 11B); and
(2) it does not affect adaption of the human eye.
There are a number of readily available near infrared
illumination sources, including solid-state sources
30 such as light emitting diodes (LEDs) and lasers, flash
lamps such as xenon or krypton lamps, incandescent
lamps such as tungsten lamps, as well as many others.
Preferred, however, are gallium arsenide (GaAs) or
gallium aluminum arsenide (GaAlAs) LEDs because they
35 provide a relatively narrow band (about 750 to 950 nm)
of near infrared illumination (see Figs. 11A and 11B).
Such illumination sources are also typically packaged

with a lens to distribute the illumination. Depending on the particular application, the illumination distribution characteristics of readily available lens/source packages may range from narrow so as to provide spot or collimated illumination to very diffuse so as to cover about 160°. In the vehicle interior monitoring system described herein, the lens/source package preferably provides illumination coverage on the order of about 100°.

Other illumination sources providing broad-band illumination (ultraviolet through infrared) may also be used, but it may be desirable or necessary to filter such broad-band illumination using absorption or interference type filters, or any other appropriate filter. In particular, an interference filter known as a long-wave pass filter or cold mirror reflects visible light, transmits infrared illumination and looks like the normal silvered mirrors typically used in the rearview mirror 1. Unlike cold mirrors, however, silvered mirrors reflect near infrared illumination. Since the cold mirror resembles the silvered mirror in the rearview mirror 1, it may be used to replace a section or even all of the silvered mirror. In particular, the supplemental source of illumination may be located behind the cold mirror element and adjacent to the photosensor array 32 with an opaque barrier separating the two to prevent supplemental illumination reflections within the rearview mirror 1 from directly affecting the photosensor array 32.

Alternatively, a long-wave pass absorption filter may be used with a supplemental source of broad-band infrared illumination. Long-wave pass absorption filters may be fabricated using a wide variety of polymers having appropriate optical transmission characteristics such as epoxies, acrylics,

polycarbonates, as well as a variety of glasses. The acrylic and polycarbonate polymers are preferred because they are environmentally stable, cost effective and because they may be used to injection mold parts having various geometric shapes or polished or textured surfaces. Using absorption filter materials, the photosensor array 32 and supplemental source of illumination may be integrated into the rearview mirror 1 or elsewhere within or on the vehicle so that they are not readily apparent to vehicle occupants, passers-by or potential intruders.

III. The Logic And Control Circuit

Figure 6 shows the light sensing and logic circuit 26 comprising the photosensor array 32 and the logic and control circuit 34. The logic and control circuit 34 comprises a logic circuit 46, a clock 47, a random-access-memory (RAM) 50, or other appropriate memory, and a digital-to-analog converter 52. The logic circuit 46 is preferably a dedicated configuration of digital logic elements constructed on the same semiconductor substrate as the photosensor array 32. Alternatively, the logic circuit 46 may also be a microprocessor comprising a central processing unit (CPU) and a read-only-memory (ROM). The logic circuit 46 may also be implemented using gate array technology or any other appropriate hardwired logic circuit technology.

The logic circuit 46 interfaces with the clock 47, provides array control signals to the photosensor array 32, manages data flow to and from the RAM 50 and converters 44 and 52, and performs all computations for determining a digital mirror control signal $V_{DAC}(Z)$ for causing the variable reflectance mirror element 1a to assume a desired reflectance level. As discussed, the

analog-to-digital converter 44 converts the analog
photosensor element signals to the digital photosensor
element signals processed by the logic circuit 46. It
has been found that an eight-bit analog-to-digital
5 converter 44 provides adequate data resolution for
controlling the mirrors 1, 4 and 5. Preferably, the
analog-to-digital converter 44 is constructed on the
same semiconductor substrate as the photosensor array
32 as shown in Fig. 5.

10

The digital photosensor element signals output to the
logic and control circuit 34 are generally stored in
the RAM 50 for processing. The values of the digital
photosensor element signals for the photosensor array
15 PA(N,M) are correspondingly stored in an array in the
RAM 50 designated RA(N,M). The logic circuit 46
processes the values of each of the digital photosensor
element signals, which are designated Val RA(n,m), to
determine an instantaneous or substantially real-time
20 background light signal B_t for a time period t and at
least one peak light signal $P(z)$. The logic circuit 46
uses these signals, which may also be temporarily
stored in the RAM 50, to determine a digital control
signal $V_{DAC}(z)$ to cause at least one mirror or mirror
25 segment to assume a desired reflectance level. The
digital mirror control signal $V_{DAC}(z)$ is then output to
the digital-to-analog converter 52, which outputs a
corresponding analog mirror control signal $V_c(z)$ to a
mirror drive circuit 24. Alternatively, the digital-
30 to-analog converter 52 need not be used if the logic
circuit 46 generates a pulse-width-modulated (PWM)
mirror control signal to control the mirror drive
circuit 24.

35 The mirror drive circuit 24 comprises mirror drive
circuits 24a, 24b and 24c. The drive circuit 24 drives
mirrors 28, which comprises a rearview mirror 28a

668070" 44E 2260

(mirror A), a left side view mirror 28b (mirror B) and a right side view mirror 28c (mirror C). Mirrors A, B and C correspond, respectively, to the rearview mirror 1, the left side view mirror 4 and the right side view mirror 5 shown in Fig. 2. It is, of course, within the scope of the present invention for the mirror A to be a mirror other than the rearview mirror 1. It is similarly within the scope of the present invention for the mirror B to be a mirror other than the left side view mirror 4, and for the mirror C to be a mirror other than the right side view mirror 5. It is also within the scope of the invention for the mirrors A, B and C to be mirror segments or zones of the variable reflectance mirror element 1a where the peak sub-array S(X) for each zone corresponds to a segment of the variable reflectance mirror element 1a. Thus, for example, S(1) may correspond to a center mirror segment, S(2) may correspond to a left mirror segment and S(3) may correspond to a right mirror segment. Any other appropriate mirror segmentation scheme may also be used.

A sensitivity control circuit 42 is used to input a sensitivity signal S to the logic and control circuit 34. In addition, signals from a force-to-day (maximum reflectance) switch 36, a reverse-inhibit (maximum reflectance) switch 38 and a force-to-night (minimum reflectance) switch 40 may also be input to the logic and control circuit 34. The switch 3 of Figs. 1A and 1B may include the sensitivity control circuit 42, as well as the force-to-day switch 36 and the force-to-night switch 40.

The switches 36, 38 and 40 each generate a signal causing the logic circuit 46 to override its normal operation, as will be described with respect to Figs. 7, 8A and 8B, and to output mirror control signals $V_c(z)$

to the mirror drive circuit 24 causing the variable reflectance mirror 28 to assume a maximum or minimum reflectance level in accordance with the appropriate signals from the switches 36, 38 or 40.

5

Finally, the logic and control circuit 34 may also be used to control a vehicle lighting switch 45 to automatically turn on and off a vehicle's headlights and sidelights. This feature will be further described later.

10

Figure 6A shows the block schematic diagram of the automatic rearview mirror and vehicle interior monitoring system. The previous description of Figure 6 applies here except as follows. First, the logic and control circuit 34 includes an analog-to-digital converter 55 for converting one or more analog control input signals 70 (1, 2, . . . , N; blocks 70a to 70n) to digital signals that are input to the logic circuit 46.

20

With respect to the automatic rearview mirror system, the analog control input signals 70 may include any analog control input signal used therein, including, for example, analog versions of the control input signals provided by the force-to-day-switch 36, reverse-inhibit-switch 38, force-to-night-switch 40 or sensitivity control circuit 42 of Fig. 6. Of course, digital versions of these same control input signals may also be input to the logic circuit 46 as digital control input signals 75 (1, 2, . . . , N; blocks 75a to 75n). The analog control output signals 80 (1, 2, . . . , N; blocks 80a to 80n) may include any analog control output signal used in the automatic rearview mirror system, including the analog mirror control signals $V_c(z)$. The analog circuits/switches 81 (1, 2, . . . , N; blocks 81a to 81n) may include the drive mirror circuits 24 that are used to drive the variable

35

668070" FILE 2260

reflectance mirrors 28. As discussed with respect to Fig. 6, the analog mirror control signal $V_c(z)$ is output to the mirror drive circuit 24 causing the variable reflectance mirror 28 to change reflectance levels. Of course, digital control output signals 85 (1, 2, . . . , N; blocks 85a to 85n) may also be output to digital circuits/switches 86 (1, 2, . . . , N; blocks 86a to 86n) to the extent that the control output signals are digital and not analog.

10

With respect to the vehicle interior monitoring system configured as a vehicle intrusion detection system, analog control input signals 70 and digital control input signals 75 may include, respectively, analog and digital versions of control input signals used to "arm" or "alert" the vehicle intrusion detection system, as will be further described later. The analog control output signals 80 may include any analog control signals output to analog circuits/switches 81 that are used in the above system, including analog circuits or switches used to actuate various vehicle hardware, such as the vehicle horn (or siren), exterior and interior lights or ignition control devices. Of course, digital control output signals 85 (1, 2, . . . , N; blocks 85a to 85n) may also be output to digital circuits/switches 86 (1, 2, . . . , N; blocks 86a to 86n) to the extent that the control output signals are digital and not analog. In particular, the digital control output signal 85 may include a digital word provided to a digital circuit/switch 86 that is a vehicle controller system that interfaces with such vehicle hardware.

When the vehicle interior monitoring system is configured as a compartment image data storage system, a nonvolatile memory 57, as shown in Fig. 6A, is included. The nonvolatile memory 57 interfaces with the logic circuit 46. The nonvolatile memory 57 is

used to store image data, as will be further described later. The nonvolatile memory 57 may be an EEPROM or other appropriate nonvolatile memory. An access/security decoding logic circuit 58 interfaces with a data access port 59 and the logic circuit 46. The access/security decoding logic circuit 58 and data access port 59 are used to access the image data stored in the nonvolatile memory 57, as will be further described later. Optionally, this system may include a data compression logic circuit 56 for compressing image data received from the logic circuit 46 before it is stored in the nonvolatile memory 57. The data compression logic circuit 56 may be integral with the logic circuit 46.

Finally, whether configured as a vehicle intrusion detection system or as a compartment image data storage system, the vehicle interior monitoring system preferably includes a supplemental source of illumination 61 having a lens 62 as shown in Fig. 6A. A supplemental source of illumination drive circuit 60 is connected to the supplemental source of illumination 61. The drive circuit 60 also interfaces with and receives control signals from the logic circuit 46 to drive the supplemental source of illumination 61.

IV. Operation Of The Invention

Figure 7 shows an overview of the logic flow chart and method for controlling the reflectance levels of any one or all of the mirrors or mirror segments 28a, 28b or 28c. It should be understood that the reflectance level of each of the mirrors 28a, 28b and 28c in the automatic rearview mirror system of the present invention may be commonly or independently controlled. Figures 8A, 8B and 9 provide more detail on the logic and method of Fig. 7.

In step S101 of Fig. 7, light information seen rearwardly of the rearview mirror 1 is incident on the lens 30. In step S110, light passing through the lens 30 is refracted such that the light information is
5 imaged or focused onto the photosensitive surface of the photosensor array 32. In step S120, the logic circuit 46 generates and outputs the array control signals to the photosensor array 32. In step S130, photosensor element signals indicative of the light
10 levels incident on each of the photosensor elements 32a are generated. In step S140, these photosensor element signals are temporarily stored in RAM or any other appropriate memory. In steps S150 and S160, the logic circuit 46 determines values for the background light
15 signal and the peak light signal for each zone corresponding to each of the mirrors 28. In step S180, the logic circuit 46 uses the background and peak light signals of step S150 to determine the control signals required to cause each of the mirrors 28 to achieve a
20 desired reflectance level. Also, the logic and control circuit 34 in step S180 reads and processes the states of the optional sensitivity control circuit 42, force-to-day switch 36, force-to-night switch 40 and reverse-inhibit switch 38. In step S200, the mirror drive
25 circuits 24 use the control signals determined in step S180 to generate drive signals to cause the mirrors 28 to assume the desired reflectance levels in step S210.

In one embodiment of the invention, the logic circuit
30 46 determines the background light signal B_i in steps S150 and S160 by calculating the average value of the photosensor element signals, previously stored in RAM in step S140, for the photosensor elements 32a in a lowest row or rows of the photosensor array 32
35 corresponding to an area below the rear window. With respect to Figs. 3A and 3B, this means that the background light signal B_i is determined from

photosensor element signals generated by the
photosensor elements 32a located in row D of the
photosensor matrix array 32. The logic circuit 46 may
then output B_i to the RAM 50 for later processing. The
5 logic circuit 46 may also determine B_i by calculating an
average value of all of the photosensor element signals
in the entire photosensor array 32. More generally,
the background light signal B_i for the rearward scene
may be determined by calculating the average value of X
10 percent of the lowest photosensor element signal values
in the RAM array $RA(N,M)$, where X is preferably 75, but
typically may be in the range of 5 to 100.
Alternatively, an exposure period EP, as is described
herein, may be used to determine the background light
15 signal B_i . An array response AR may be determined using
an array average method, as is also described herein,
for the photosensor element signal values corresponding
to a sub-array S(X) of the photosensor elements 32a of
the photosensor array 32 that correspond to an area
20 below the rear window. The exposure period EP may be
varied within an operating point range $OP \pm R$, where OP
is 10 and R is 5 (8-bit data), but where OP may be from
5 to 175 and R may be from 2 to 15. The exposure
period is varied to maintain AR within $OP \pm R$. The
25 background light signal B_i may therefore be determined
where B_i varies inversely with EP.

Additionally, the background light signal B_i is
preferably change-limited to determine a limited
30 background light signal B_{Li} . The signal B_i may be
change-limited, for example, by limiting changes in the
background light signal B_i to 2% per time frame. A time
frame may be, for example, 250 milliseconds or any
other time relating to the rate at which the logic
35 circuit 46 samples the photosensor element signals from
the photosensor array 32. The logic circuit 46
determines the change-limited value B_{Li} used to

determine the digital mirror control signal $V_{DAC}(z)$ as follows: $B_{Li} = B_{L(t-1)} + C_L \times (B_i - B_{L(t-1)})$, where B_{Li} = the change-limited background light signal for a current time frame t , B_i = the actual or substantially real-time background light signal for the current time frame t , $B_{L(t-1)}$ = the change-limited background light signal for a previous time frame $(t-1)$ and C_L = the change-limit value. Additionally, the background light signal B_i from step S150 may be processed by the logic circuit 46 to determine whether the change limited background light signal B_{Li} is less than or greater than $B_{L(t-1)}$. If B_{Li} is greater than $B_{L(t-1)}$, then the logic circuit 46 may use a higher change-limit value C_{LH} to determine B_{Li} . If the background light signal B_{Li} is less than or equal to $B_{L(t-1)}$, then the logic circuit 46 may use a lower change-limit value C_{LL} to determine B_{Li} . The values C_{LH} and C_{LL} are in the range of 0.01 to 2, but are preferably on the order of about 0.02 or 2%.

The logic circuit 46 in step S150 also determines the peak light signal $P(z)$ for each zone or sub-array $S(X)$ of the photosensor matrix array 32. The peak light signal $P(z)$ used to determine the appropriate mirror control signal $V_c(z)$ for the mirror 28 may be determined by counting or summing the number of occurrences where the digital value for a photosensor element signal is greater than a peak threshold value F for each zone or sub-array $S(X)$. For the preferred analog-to-digital converter having eight-bit data resolution, the logic circuit 46 generates digital values indicative of light levels of light incident on each photosensor element 32a in the range of 0 to 255 ($2^8 - 1 = 255$), with headlights resulting in values in the range of about 200 to 255, so that the peak threshold value F is selected to be in the range of about 200 to 255 but is preferably 245. The resulting count or sum $P(z)$

provides a measure of the peak light level for the following reasons.

One design objective of the lens 30 and the photosensor array 32 combination is to be able to measure background light levels in the approximate range of 0.01 to 0.1 lux when driving on sufficiently dark roads. This is achieved by ensuring that the lens 30, photosensor elements 32a and charge-to-voltage amplifiers 33c are able to measure such light levels and by providing a maximum exposure time. The maximum exposure time determines the operating frequency or sampling rate of the system 20. In the case of the described system, 1.5 MHz has been found to be appropriate.

By varying the exposure time relative to a general background light level B and using a substantially constant sampling rate, a wide range of background light levels in the range of 0.01 to 1000 lux can be measured. Thus, when the background light level is low, the exposure time is relatively long such that headlights within the rearward area cause the affected photosensor elements 32a to saturate. Correspondingly, for higher background light levels, the exposure time is reduced. Saturation occurs when the incident light charges the photosensor element 32a to capacity so that any excess charge will leak or transfer to adjacent photosensor elements 32a. This charge leakage effect is commonly referred to as "blooming." It has been found that a count of the number of photosensor elements 32a at or near saturation, i.e., those having digital values greater than the peak threshold value F, provides an excellent approximation of the peak light levels and is further described in Fig. 8A. The above described method effectively extends the range of measurable light levels for the photosensor array 32.

As discussed, photosensor element signals are indicative of the incident light level or intensity and the time period for which they are exposed to such light. By operating the photosensor array 32 for a known exposure time or exposure period EP, the incident light intensity may be determined from the photosensor element signal generated by each photosensor element 32a. After the exposure period, the logic and control circuit 34 processes all of the photosensor element signals for each photosensor element 32a of the photosensor array 32. This signal processing at least includes the process of storing the digital value of each photosensor element signal to obtain RA(N,M), but normally includes all other processing for each image data set RA(N,M) up to and including the generation of output control signals, such as the mirror control signal $V_c(Z)$. The time from the beginning of the exposure period EP through the processing of each image data set RA(N,M) and the generation of the appropriate output control signals is referred to as the operating or sampling period, and the frequency thereof is referred to as the operating frequency or sampling rate. The frequency at which the process is repeated may also be referred to as the frame rate or the image sampling frequency. The rate of each sub-process (e.g., exposure period) within the sampling period is controlled by the system clock 47. Thus, the frame rate or image sampling frequency is essentially fixed for a particular system clock frequency. The total period corresponds to a maximum exposure period EP and the total processing time relating to an image data set RA(N,M). The system clock frequency may be adjusted to scale the image sampling frequency, thereby adjusting EP. In summary, the maximum exposure period, the operating or sampling period, the signal processing time and the frequency of the system clock 47 should be considered in each application.

Alternatively, if an anti-blooming device is incorporated in the photosensor array 32, such as is well known to those skilled in the art, then the peak light signal $P(z)$ may be determined by calculating an average value of Y percent of the highest photosensor element signal values for each zone, where Y is preferably 10, but may be in the range of 1 to 25. When using this approach for determining $P(z)$, it is also preferable to include logic to adjust the sampling rate or operating frequency of the logic circuit 46 to an appropriate value depending on B_L .

The general background light signal B , whether B_t or B_L , and the peak light signal $P(z)$ for each zone of the photosensor array 32, as determined in steps S150 and S160, are then used by the logic circuit 46 to determine a mirror control signal $V_C(z)$ as a function of the ratio of B^n (n preferably has a value of one but may typically range from 0.8 to 1.3) to $P(z)$, i.e., $V_C(z) = f(B^n/P(z))$. The control signal $V_C(z)$ is then output to the mirror drive circuits 24 in step S180 to drive the mirrors 28 or segments thereof to their desired reflectance level in the steps S200 and S210.

Figure 12 shows the logic flow chart and method for the vehicle interior monitoring system or mode.

In step S301, the logic circuit 46 initializes the system, sets EP to its maximum and if used, SSI to a predetermined minimum, such as zero. Next in step S310, the logic circuit 46 reads any analog control input signals 70 (70a to 70n of Fig. 6A) and/or digital control input signals 75 (75a to 75n of Fig. 6A) that may be used in the vehicle interior monitoring mode.

35

In step S315, the photosensor element signals are generated, processed and stored in RAM 50 by the logic

circuit 46 (see steps S101 to S140 of Fig. 7). The logic circuit 46 also applies the lens correction factor $LC(n,m)$ to each digital value $Val\ RA(n,m)$ indicative of the photosensor element signal $L(n,m)$ of each photosensor element 32a in the RAM array $RA(N,M)$ to correct for the effect of lens 30. This results in $RA(N,M)$ containing the lens corrected digital value $Val\ RA_{LC}(n,m)$ indicative of the photosensor element signal of each photosensor element 32a.

10

Next, in step S320, the logic circuit 46 determines the array response AR , which is indicative of either $RA(N,M)$ (an entire image data frame or set $RA_{(t)}$ at time t) or of a selected sub-array or sub-set thereof $RS(N_s, M_s)$ (a partial image data frame or set $RS_{(t)}$ at time t), where N_s and M_s are the row and column dimensions corresponding to a selected sub-array $S(X)$ of the photosensor array 32. The logic circuit 46 processes the image data frame $RA_{(t)}$ using one of the methods described below to determine the array response AR . An appropriate operating point range $OP \pm R$ is associated with each AR calculation method.

The preferred method for determining AR is the array average method, in which the logic circuit 46 determines AR by averaging all of the data values $Val\ RA_{LC}(n,m)$ in the image data frame $RA_{(t)}$ (or selected sub-array $RS_{(t)}$) where:

$$AR = \frac{1}{N \cdot M} \sum_n \sum_m Val\ RA_{LC}(n, m) ,$$

30

for $n = 1$ to N , $m = 1$ to M . Using the array average method, it has been found that appropriate OP and R values are 127 and 20 (8-bit data resolution), respectively; however, the operating point range may be non-symmetrical for some tasks by using non-symmetrical R values, such as +20 and -10.

35

An alternative method is the "no saturation" method, in which EP is set to its highest level at which there is no saturation or blooming in any photosensor element 32a. In this case, the logic circuit 46 reduces EP
5 until the peak value of $RA_{(0)}$ or $RS_{(0)}$ is within the operating point range $OP \pm R$. It has been found that appropriate OP and R values are 249 and 5, respectively. Still another method involves maximizing the useful image area, in which the logic circuit 46
10 determines AR by determining the difference between the number of photosensor elements 32a having digital values of 0 and the number having digital values of 255 (8-bit data resolution). In this case, appropriate OP and R values are 0 and 5% of the number of photosensor
15 elements 32a corresponding to the image data set $RA_{(0)}$ or sub-array $RS_{(0)}$. It should be understood that the specific values, such as 127 and 255, are based on 8-bit data resolution and would be appropriately scaled for other data resolutions.

20 In step S330 and S360, it is determined whether AR is in the operating point range $OP \pm R$. If AR is outside the range, then the image data frame is either too bright ($AR > OP + R$) or too dim ($AR < OP - R$) and EP and
25 SSI are incrementally increased or decreased according to steps S340, S341, S342 or S350, S351, S352. This is repeated for every image data frame $RA_{(0)}$. The system thus optimizes EP and SSI for the particular circumstances at system startup, and thereafter
30 continues to adjust EP and SSI to maintain AR within the operating point range $OP \pm R$ as lighting conditions change.

If AR is within the operating point range $OP \pm R$, then
35 the vehicle interior monitoring system/mode enters a primary task routine or mode in step S370, such as the vehicle intrusion detection system/mode (S400) of

Figure 12A or the compartment image data storage system/mode (S500) of Figure 12B. After completing the primary task routine, the program returns to the vehicle interior monitoring mode to generate and store
5 another image data frame RA_0 .

V. The Preferred Embodiments

The general lighting conditions of the rearward scene
10 can be defined as follows: the background light level of the viewed rearward scene is B and the peak light level for each zone or sub-array $S(X)$ is $P(z)$. A contrast ratio $C(z)$ may be defined as the ratio of the peak light level $P(z)$ for each zone to the general
15 background light level B; thus, $C(z) = P(z)/B$. Given the background light level B, the human eye can tolerate varying peak light levels in the viewed rearward scene up to a particular contrast ratio tolerance C_T . Contrast ratios greater than C_T initially
20 cause discomfort and are generally known as glare. As the eye adjusts its light sensitivity to protect itself from the discomforting peak or glare light levels, vision is reduced and the glare may become disabling. Thus, the maximum tolerable peak light level P_T of the
25 viewed rearward scene is equal to the product of the contrast ratio tolerance C_T and the background light level B, i.e., $P_T = C_T \times B$.

The desired reflectance $R_d(z)$ of a variable reflectance
30 mirror for each zone is that reflectance level which reduces a peak light level $P(z)$ to a value equal to the maximum tolerable peak light level P_T , i.e.,
 $P_T = R_d(z) \times P(z)$ or $R_d(z) = P_T/P(z)$, and substituting the expression for P_T , $R_d(z) = (C_T \times B)/P(z)$. However,
35 the maximum tolerable contrast ratio C_T varies across the population due to aging and other factors; accordingly, a sensitivity factor S may be used to

account for this variation in contrast tolerance sensitivity so that $R_d(z) = (S \times C_T \times B)/P(z)$. Selecting the desired reflectance $R_d(z)$ for each zone provides maximum information from the rearward scene viewed in each mirror or mirror segment while reducing discomforting or disabling peak light levels to tolerable levels.

The mirror control signal $V_C(z)$ required to obtain the desired reflectance $R_d(z)$ depends on the particular variable reflectance mirror element that is used. For electrochromic mirrors, a voltage-reflectance relationship can be approximated and generally defined. In general, an electrochromic mirror has a reflectance level R having a maximum value of R_1 with an applied voltage V_{app} of 0 volts. As the applied voltage V_{app} is increased, the reflectance level R perceptually remains on the order of R_1 until V_{app} reaches a value of approximately V_1 . As V_{app} is further increased, the reflectance level R decreases approximately linearly until a minimum reflectance of approximately R_2 is reached at a voltage V_2 . Thus, the applied voltage V_{app} can be approximately defined as:

$$V_{app} = V_1 + (R_1 - R) \times (V_2 - V_1)/(R_1 - R_2)$$

Substituting desired reflectance $R_d(z)$ for the reflectance R results in the mirror control signal, the voltage of which is determined as follows:

$$V_C(z) = V_1 + (R_1 - S \times C_T \times B/P(z)) \times (V_2 - V_1)/(R_1 - R_2).$$

To obtain a digital value $V_{DAC}(z)$, $V_C(z)$ is scaled by a factor that is the ratio of the maximum digital value to the value V_2 ; thus, for eight-bit data resolution

$$V_{DAC}(z) = 255 V_C(z)/V_2, \text{ and substituting for } V_C(z):$$

$$V_{DAC}(z) = 255(V_1 + (R_1 - S \times C_T \times B/P(z)) \times (V_2 - V_1)/(R_1 - R_2))/V_2.$$

Figure 8A provides further detail on the steps S150 and S160 where the logic circuit 46 determines the background and peak light signals. More particularly,

steps S151, S152, S159 and S160 provide two processing loops for sequentially determining the digital values indicative of the photosensor element signals, Val RA(n,m), in the RAM array RA(N,M) for each of the
5 photosensor elements 32a of the photosensor array PA(N,M).

In step S153, a lens correction factor LC(n,m) is applied to each digital value indicative of the
10 photosensor element signal, Val RA(n,m), to correct for the effects of lens 30, which results in a lens corrected digital value of the photosensor element signal Val RA_{LC}(n,m). These effects are typically referred to as cosine effects or Lambert's Law effects.
15 The lens correction factor LC(n,m) depends on the radial distance of the photosensor element 32a from a central axis of the lens 30, and is typically in the range of 1 to 15 but will depend on the geometry of the lens and the selected photosensor array. The lens
20 correction factor LC(n,m) applied to each Val RA(n,m) may be calculated according to Lambert's Law each time Val RA(n,m) is processed. More preferably, the logic circuit 46 initially stores an array of values LC(n,m) in the RAM 50 for each photosensor element 32a of the
25 photosensor array PA(n,m) during an initialization routine. Alternatively, the size of the photosensor elements 32a of the photosensor array 32 may be adjusted to correct for the lens effects at each photosensor element 32a.

30 As discussed, it has been found that light levels for headlights generally result in an eight-bit digital value greater than a peak threshold value F having a value of about 245. Correspondingly, during non-
35 daylight operation of the automatic rearview mirror system 20, background light levels generally result in eight-bit digital values indicative of the light levels

incident on the photosensor elements 32a that are less than or equal to the peak threshold value F.

Accordingly, the lens corrected value Val $RA_{LC}(n,m)$ is
5 compared in step S154 to the peak threshold value F.
If Val $RA_{LC}(n,m)$ is less than or equal to F it is used
to increment a counter B_{Count} , in the logic circuit 46, by
1 in step S157 (thereby indicating that a value less
than or equal to F has been identified) and by
10 increasing a value B_{Sum} by the value of Val $RA_{LC}(n,m)$ in
step S158, where B_{Sum} is the sum of all the values of
Val $RA_{LC}(n,m)$ which are less than or equal to F. The
background light signal B_t is then determined in step
S161 as follows: $B_t = B_{Sum}/B_{Count}$. If Val $RA_{LC}(n,m)$ is
15 greater than F in step S154, then the logic circuit 46
uses a counter $P(z)$ indicative of the peak light levels
for each of the zones or sub-arrays $S(X)$ of the
photosensor array $PA(N,M)$, which is incremented by 1 as
previously described. More particularly, Val $RA_{LC}(n,m)$
20 is tested in step S155 to determine whether it
originates from a particular zone or sub-array $S(X)$,
where $X = 1$ to Z . If Val $RA_{LC}(n,m)$ does not fall within
a defined zone or sub-array $S(X)$, then $P(z)$ is not
incremented; otherwise, $P(z)$ is incremented in step
25 S156 for the appropriate zone.

If the photosensor array 32 is arranged to view the
rearward area through the active layer of the variable
reflectance element 1a, then a color correction factor
30 CC is applied in step S162 to B_t and $P(z)$ to compensate
for any reduction in transmittance when the reflectance
level (and transmittance) of the rearview mirror 1 is
reduced. The value of CC is determined from the last
calculated value indicative of the digital mirror
35 control signal $V_{DAC}(z)$ applied to the rearview mirror 1.
In step S163, a change-limited background light signal
 B_{Lu} is determined as has been described previously.

Figure 8B provides further detail on step S180 where the logic circuit 46 determines the appropriate digital mirror control signal $V_{DAC}(z)$ for each zone or sub-array $S(X)$ and corresponding mirror 28. In steps S181 and

5 S182, $V_{DAC}(z)$ is calculated for each mirror 28. In step S183, the logic circuit 46 reads a state IN1 of the reverse-inhibit switch 38 and if the vehicle is in reverse gear so that IN1 is high, then all digital mirror control signals $V_{DAC}(z)$ are set to 0 in step S184

10 forcing the mirror 28 to its maximum reflectance level. In step S185, a state IN2 of the force-to-day switch 36 is read and if IN2 is high, then all digital mirror control signals $V_{DAC}(z)$ are set to 0 in step 186 forcing the mirror 28 to its maximum reflectance level.

15 Finally, in step S187, a state IN3 of the force-to-night switch 40 is read and if IN3 is high, then all digital mirror control signals $V_{DAC}(z)$ are set to 255 (the maximum digital value for eight-bit data resolution) in step S188 forcing the mirror 28 to its

20 minimum reflectance level.

Figure 9 shows another view of the logic flow whereby the rearview mirror, the left side view mirror and the right side view mirror (or alternatively three mirror

25 segments) are independently driven to their desired reflectance levels by the independent and separate control and drive signals using photosensor element signals from three photosensor element sets (i.e., the sub-arrays $S(1)$, $S(2)$ and $S(3)$ of photosensor elements

30 32a in the photosensor array $PA(n,m)$). The specific subroutines shown in Figs. 8A and 8B corresponding to the general steps shown in Fig. 7 are also used with the general steps shown in Fig. 9.

35 In step S201, light incident on the lens 30 is focused in step S210 onto the photosensor array 32 comprising the first, second and third sets of photosensor

elements 32a in zones a, b and c, respectively. Next,
in step S211, the light incident on the first
photosensor element set in zone a generates a first set
of photosensor element signals, which, in step S211',
5 are then stored in RAM and later used by the logic
circuit 46 to determine a first peak light signal in
step S212.

In step S221, the light incident on the second
10 photosensor element set in zone b generates a second
set of photosensor element signals, while in step S231,
the light incident on the third photosensor element set
in zone c generates a third set of photosensor element
signals. The second set of photosensor element
15 signals, generated in step S221 are also stored in step
221' in RAM and then used by the logic circuit 46 to
determine a second peak light signal in step S222.
Similarly, the third set of photosensor element
signals, generated in step S231, is next stored in step
20 S231' in RAM and then used by the logic circuit 46 to
determine a third peak light signal in step S232.

In step S213, photosensor element signals generated
from selected photosensor elements on which light is
25 incident in step S210 are used to determine the
background light signal.

In step S214, the logic circuit 46 uses the background
light signal determined in step S213 and the first peak
30 light signal determined in step S212 to determine a
first control signal. Similarly, the logic circuit 46
uses the background light signal of step S213 and the
second peak light signal determined in step S222 to
determine a second control signal in step S224. In the
35 same manner, the background light signal of step S213
and the third peak light signal of step S232 are used

668070 "THE 222222"

by the logic circuit 46 to determine a third control signal in step S234.

5 The first control signal determined in step S214 is used by the drive circuit 24a to generate a first drive signal in step S215. This first drive signal drives the rearview mirror 28a to a desired reflectance level in step S216. Likewise, the second control signal determined by the logic circuit 46 in step S224 is used
10 by the drive circuit 24b to generate a second drive signal in step S225, which is then used to drive the left side view mirror 28b to a desired reflectance level in step S226. Finally, the third control signal determined by the logic circuit 46 in step S234 is used
15 by the drive circuit 24c to generate a third drive signal to drive the right side view mirror 28c to a desired reflectance level in step S236. Of course, the first, second and third control signals may also be used to control the segments of a mirror 28.

20 Finally, as previously discussed, one advantage of the present invention is that it is able to use a single photosensor array 32 to determine both a background light level and a peak light level for controlling the
25 reflectance level of a mirror. This is especially advantageous where the sensor must be placed outside the interior of the vehicle to view the rearward scene. This may be required, for example, in certain truck type vehicles where only exterior side view mirrors may
30 be used and automatic operation is desired.

Accordingly, the photosensor array 32 may be located with each side view mirror. The other electronics for the automatic rearview mirror system 20, described previously, may be located either with the photosensor
35 array 32 in each side view mirror, inside the vehicle cab or elsewhere in or on the vehicle. A desired reflectance level for each exterior side view mirror

may then be accurately determined using both the determined background light level and peak light level using only a single photosensor array 32 for each mirror.

5

Figures 12 and 12A show the logic flow charts of the vehicle interior monitoring system configured as a vehicle intrusion detection system (primary task S400).

- 10 In step S401, the current image data frame $RA_{(i)}$ is processed to enhance its contrast characteristics so that it is largely unaffected by changing light levels or shadows, etc. Preferably, the logic circuit 46 selects an appropriate sub-array $RS_{(i)}$ corresponding to
- 15 the sub-array $S(X)$ (or other appropriate set) of photosensor elements 32a of the photosensor array 32 containing the relevant image information.

- As discussed, the particular area of interest or
- 20 significance in the photosensor array 32 may be a sub-array $S(X)$ of photosensor elements 32a of the photosensor array 32 (or other appropriate set not necessarily rectangular in shape, such as a trapezoid). The ability to select image data corresponding to $S(X)$
- 25 is important because some sets of photosensor elements 32a may provide image information that is redundant, irrelevant or even damaging to a particular application and should therefore be ignored by the logic circuit 46. A significant advantage of the photosensor array
- 30 32 over other sensing technologies is its ability to provide selected image information so that the logic circuit 46 need only process $RS_{(i)}$ when, for example, the relevant sub-array $S(X)$ and corresponding sub-array $RS_{(i)}$ contain all the image information necessary to a
- 35 particular application. For example, in the automatic rearview mirror and vehicle intrusion detection system described herein, a selected sub-array $S(X)$ of

photosensor elements 32a may provide image information as shown in Figs. 3A and 3B, which may be used by logic circuit 46 to provide information regarding the location and intensity of the headlights of following vehicles. To the extent that other areas of the photosensor array 32 do not provide such image information, they may be ignored. Likewise, since the same photosensor array 32 may be used for vehicle intrusion detection, the logic circuit 46 need only process the image information of Fig. 2A that excludes the image information of Figs. 3A and 3B. Without this ability to select particular sets or sub-arrays, at least more intensive processing may be required to distinguish between unauthorized activity within the vehicle and irrelevant activity outside the vehicle.

After selecting the appropriate set of image data, the logic circuit 46 processes the values in RA_0 to enhance the contrast or robustness of that image data frame.

Excluding photosensor elements 32a in the outside rows and columns of the photosensor array 32, every photosensor element $E(n,m)$ has eight (8) adjacent photosensor elements 32a or neighbors: $E(n-1,m)$; $E(n,m-1)$; $E(n-1,m-1)$; $E(n+1,m)$; $E(n,m+1)$; $E(n+1,m-1)$; $E(n-1,m+1)$; and $E(n+1,m+1)$. Therefore, a contour value $CV(n,m)$ for each photosensor element $E(n,m)$ may be calculated by determining the average of the differences between the value $Val\ RA_{LC}(n,m)$ of the photosensor element $E(n,m)$ and the value of each neighbor. If the photosensor element value is an n-bit value, then $CV(n,m)$ is also an n-bit value. Thus, using 8-bit data resolution, for example, if $E(n,m)$ has a 0 value and each neighbor has a value of 255, then $CV(n,m)$ is 255. If $E(n,m)$ has a value of 255 and each neighbor has a 0 value, then $CV(n,m)$ is 255. Both examples indicate a high degree of local contrast or discontinuity. On the other hand, if $E(n,m)$ and each

neighbor has a value of 127, then $CV(n,m)$ is 0, which indicates a low degree of local contrast. Thus, the logic circuit 46 uses the above method, to determine the contrast value $CV(n,m)$ for each value Val $RA_{LC}(n,m)$ of $RA_{(0)}$ to obtain a contour enhanced image data frame $RC_{(0)}$ in which the "harder" image contours or discontinuities are emphasized or enhanced, while "softer" image contours are reduced in significance.

10 Next, in step S402, the logic circuit 46 correlates the current image data frame $RC_{(0)}$ and a reference image data frame $RC_{REF(i-1)}$ by comparing them to determine an image correlation factor IC. This factor is indicative of the correlation or degree of similarity (or difference) between the two image data frames independent of the particular image or photosensor array size. An IC value of 0 indicates no image similarity and an IC value of 1 indicates a perfect match. In particular, the image correlation factor IC is indicative of the number of corresponding photosensor elements 32a within the photosensor array 32 (or sub-array $S(X)$) having the same value Val $RA_{LC}(n,m)$ within some tolerance value T for the current and reference image data frames or sets. The tolerance value T accounts for minor image variations, such as may be caused by system vibration or other system "noise". Thus, the value from the current image data frame $RC_{(0)}$ corresponding to photosensor element $E(1,1)$ is compared with the value from the reference image data frame $RC_{REF(i-1)}$ corresponding to photosensor element $E(1,1)$, and if:

$$\text{Val } RC_{(0)}(1,1) = \text{Val } RC_{REF(i-1)}(1,1) \pm T,$$

then the $RC_{(0)}$ and $RC_{REF(i-1)}$ values of photosensor element $E(1,1)$ correlate. This is done for all photosensor elements 32a within the photosensor array 32 or selected sub-set thereof, and the logic circuit 46

stores and sums each correlation occurrence for each element $E(n,m)$. The logic circuit 46 then divides the resulting sum of correlation occurrences by the number of elements $E(n,m)$ considered in determining the image correlation factor IC.

Next, in step S403, the logic circuit 46 determines whether certain system start-up criteria are met. This is done to ensure that a stable image data frame $RC_{(0)}$ is stored as $RC_{REF(0)}$. Importantly, $RC_{REF(0)}$ must correspond to an optimized and stable image data frame $RC_{(0)}$. When power is initially supplied to light sensing and logic circuit 26, electrical and thermal transients occur as is typical for silicon integrated circuits. For the system described herein, satisfactory start-up criteria include: (1) a minimum number of image data frames that must be processed to allow electrical stabilization and the completion of the majority of EP and SSI optimization, where the minimum number of data frames is preferably 25 but may be in the range of 15 to 40; and (2) a stable reference image $RC_{REF(0)}$, where $RC_{REF(0)}$ is sufficiently stable when AR is within the operating point range $OP \pm R$ and IC exceeds 0.95 for at least 2 to 10 image data frames, but preferably 4 image data frames.

If the start-up criteria are not met in step S403, then, in step S404, the logic circuit 46 stores $RC_{(0)}$ in RAM 50 as a reference image data frame $RC_{REF(0)}$ (which is $RC_{REF(i-1)}$ where the current image data frame is $RC_{(i)}$ on the next system cycle) and the program returns to step S310. If the start-up criteria in step S403 are met, then the program goes to step S405.

In steps S405 and S406, threshold values T_1 and T_2 are used to determine the degree to which the current and reference image data frames match or mismatch. The

stores and sums each correlation occurrence for each
element $E(n,m)$. The logic circuit 46 then divides the
resulting sum of correlation occurrences by the number
of elements $E(n,m)$ considered in determining the image
5 correlation factor IC.

Next, in step S403, the logic circuit 46 determines
whether certain system start-up criteria are met. This
is done to ensure that a stable image data frame $RC_{(0)}$ is
10 stored as $RC_{REF(0)}$. Importantly, $RC_{REF(0)}$ must correspond to
an optimized and stable image data frame $RC_{(0)}$. When
power is initially supplied to light sensing and logic
circuit 26, electrical and thermal transients occur as
is typical for silicon integrated circuits. For the
15 system described herein, satisfactory start-up criteria
include: (1) a minimum number of image data frames that
must be processed to allow electrical stabilization and
the completion of the majority of EP and SSI
optimization, where the minimum number of data frames
20 is preferably 25 but may be in the range of 15 to 40;
and (2) a stable reference image $RC_{REF(0)}$, where $RC_{REF(0)}$ is
sufficiently stable when AR is within the operating
point range $OP \pm R$ and IC exceeds 0.95 for at least 2
to 10 image data frames, but preferably 4 image data
25 frames.

If the start-up criteria are not met in step S403,
then, in step S404, the logic circuit 46 stores $RC_{(0)}$ in
RAM 50 as a reference image data frame $RC_{REF(0)}$ (which is
30 $RC_{REF(0-1)}$ where the current image data frame is $RC_{(0)}$ on the
next system cycle) and the program returns to step
S310. If the start-up criteria in step S403 are met,
then the program goes to step S405.

35 In steps S405 and S406, threshold values T_1 and T_2 are
used to determine the degree to which the current and
reference image data frames match or mismatch. The

663073" 442200

values of T_1 and T_2 depend on the particular application and the degree of confidence or reliability required in the match/mismatch conditions of steps S405 and S406. For the vehicle intrusion detection system, it has been
5 found that appropriate threshold values may range from 0.0 to 0.6 for T_1 and from 0.95 to 1.0 for T_2 , but are preferably 0.6 and 0.95 for T_1 and T_2 , respectively. Due to image or system variations, perfect image correlation does not normally occur; therefore,
10 compared image data frames having an IC value greater than 0.95 are considered a match, those having an IC value less than 0.6 are considered a mismatch and those having an IC between T_1 and T_2 are neither a definite match nor a definite mismatch.
15 More particularly, if IC exceeds T_1 in step S405, then the logic circuit 46 determines whether IC exceeds T_2 in step S406. If IC does not exceed T_2 , then the program returns to step S310 since there is neither a match nor
20 a mismatch condition. If IC does exceed T_2 , then there is a match and the logic circuit 46 updates the reference image data frame $RC_{REF(t)}$. It should be understood that $RC_{REF(t)}$ may be the same as $RC_{(t)}$ or may represent any appropriate combination of two or more
25 image data frames. For example, $RC_{REF(t)}$ may be determined using a digital lag filter:

$$RC_{REF(t)} = RC_{REF(t-1)} + K \times (RC_{(t)} - RC_{REF(t-1)}),$$

30 where K may be a constant. After the logic circuit 46 updates $RC_{REF(t)}$ and stores it in the RAM 50, the program again returns to step S310.

If IC does not exceed T_1 in step S405, then the image
35 data frames are considered a mismatch. Even though T_1 is selected so that only significant differences between $RC_{(t)}$ and $RC_{REF(t-1)}$ provide a mismatch condition, the

logic circuit 46 determines in step S408 whether the mismatch condition is a valid intrusion condition. This is because there are conditions that result in the logic circuit 46 erroneously determining a mismatch
5 condition. For example, automotive electrical system noise may affect the ability of the photosensor array 32 to provide accurate photosensor element signals, although this normally occurs only for short periods given the nature of such noise. While not all system
10 applications may require the same level of confidence for a correct mismatch condition, it has been found that requiring a number of successive mismatch conditions represents a good validation test for step S408. In particular, it has been found that this
15 validation test better ensures that the mismatch condition is valid by requiring from 2 to 300 successive mismatch conditions. Alternatively, the validation test may require from 2 to 300 initial mismatch conditions and allow a number of match
20 conditions in step S405, where the number of match conditions may be from 1 to 15 depending on the required number of mismatch conditions.

If the logic circuit 46 determines that the mismatch
25 condition is not valid in steps 408, then the program will go to step S310. If the mismatch condition is valid, then the logic circuit 46 outputs one or more control signals in step S409. The control output signals are generally of two types: (1) signals that
30 may be used to control directly certain vehicle hardware (lights, horn, etc.); and (2) signals that may be used as inputs to other vehicle controller systems that directly interface with such hardware. The logic circuit 46 may output any combination of these control
35 output signals depending on the desired level of integration between the system of the present invention and other vehicle systems. Digital control signals,

such as bistable signals or digitally coded words interpreted by other vehicle systems, are typical for most applications. If the logic circuit 46 outputs bi-stable control signals directly to vehicle hardware, then the control output signal lines may be latched in a high or low state to control the vehicle hardware. If the logic circuit 46 outputs control signals to a vehicle controller system, then a higher protocol level, (such as digitally coded words) may have to be output from the logic circuit 46.

Figure 12B shows the logic flow chart of the compartment image data storage system configuration (primary task routine S500) of the vehicle interior monitoring systems of Fig. 12.

In step S501, the image data frame $RA_{(0)}$ (although this may be $RC_{(0)}$) is tested to determine whether it is valid. To determine whether $RA_{(0)}$ is valid in step S501, the logic circuit 46 may determine whether the array response AR is within the operating point range $OP \pm R$. More stringent validity tests may include vehicle feature recognition, in which the system attempts to identify reference vehicle features, such as the seats or window pillars, and if the logic circuit 46 cannot identify these reference features in $RA_{(0)}$, then it determines that $RA_{(0)}$ is invalid. If $RA_{(0)}$ is valid, then $RA_{(0)}$ may be optionally compressed in step S502 using any appropriate digital compression method to reduce the amount of image data. Next, in step S503, the logic circuit 46 stores the image data in the nonvolatile memory 57 on a first-in-first-out (FIFO) basis. As will be described further below, the program may end or return to step S310 to obtain and process additional image data frames depending on the particular application. If $RA_{(0)}$ is not valid, then in steps S504, S505, S506 and S507, the logic circuit 46 determines

whether the photosensor 2 has been intentionally defeated so that an accurate image data frame of the vehicle interior or compartment cannot be generated and stored in the nonvolatile memory 57.

5

More particularly, in steps S504 and S506, if it is determined that both EP and SSI are minimums, then the photosensor 2 is probably being defeated by an intruder or vehicle thief who is blinding the photosensor 2 by directing a light source, such as a bright flashlight, directly at the photosensor 2. This action saturates the photosensor array 32 so that the image data frame appears "white". Since the photosensor array 32 normally does not saturate when both EP and SSI are at their minimums, a "white" image data frame would not normally occur. In steps S505 and S507, if it is determined that both EP and SSI are maximums, then the photosensor 2 is probably being defeated by an intruder who is blinding the photosensor by placing a piece of tape or other opaque material over the lens 30 (or window) which the photosensor array 32 uses for "seeing" the vehicle interior 100. This action results in a "black" image data frame. Since SSI is maximized to allow the photosensor array 32 to generate images even if there is insufficient natural light, a "black" image data frame would also not normally occur.

If steps S504, S505 and S507 result in a "black" image condition or steps S504 and S505 result in a "white" image condition, then the logic circuit 46 outputs a control signal in step S508 to the vehicle controller to disable the ignition control device and/or to the vehicle controller system to activate the horn and lights. Otherwise, EP and SSI have not reached their adjustment limits, and the system attempts to optimize them and generates another image data frame which is

then again tested to determine its validity in step S501.

VI. Integrated Headlight Control System

5

It is generally important for driver safety reasons that the headlights and sidelights of operating vehicles are turned on as night approaches or when background lighting levels fall below approximately 500
10 lux. More particularly, it is desirable to have the vehicle's headlights and sidelights automatically turn on when background lighting levels fall to a sufficiently low level and automatically turn off when background lighting levels rise sufficiently.

15

While there are other automatic headlight control systems, such systems require that the photocells, which are used to control the headlights, be located and positioned so that they generally face upward
20 either to avoid the effects of oncoming headlights for generally forward facing photocells or to avoid the effects of following headlights for generally rearward facing photocells.

25 An advantage of the automatic rearview mirror system 20 is that the background light signal B_L may be used to automatically turn on and off a vehicle's headlights and sidelights by controlling the vehicle lighting switch 45. Importantly, since B_L is determined
30 regardless of the presence of peak light sources, such as oncoming or following headlights, the directional constraints on how and where the sensor is located or positioned are avoided. Accordingly, using the photosensor array 32 of the present invention to
35 provide additional vehicle lighting control functions results in lower costs and improved reliability over other headlight control systems.

The limited background light signal B_L has been described for the purpose of controlling the reflectance levels of an automatic rearview mirror system 20. Additionally, the logic circuit 46 may use B_L to generate a vehicle lighting control signal to control the vehicle lighting switch 45 to turn on and off automatically the vehicle's headlights and sidelights. The ability to use B_L is important because the vehicle lighting switch 45 should not be responsive to rapid or small fluctuations in background light levels in the region of the desired point at which the vehicle lighting switch is turned on or off, i.e., the switch point. Such fluctuations can be caused by the shadowing effect of overhanging trees or structures or the lighting differences between the eastern and western skylines at dawn and dusk which may be encountered when turning the vehicle.

Additionally, hysteresis is also provided between the switch-on and switch-off conditions of the vehicle lighting switch 45 to further stabilize operation of the switch 45 in such fluctuating light conditions. More specifically, if the required switch point for falling light The levels is SP, then the switch point for rising light levels is $SP \times (1 + H)$, where H is a hysteresis factor typically in the range of about 0.005 to 0.5, but is preferably 0.2. Thus, if B_L is less than SP, then the vehicle lighting control signal to the vehicle lighting switch 45 is set high to turn on the vehicle's headlights and sidelights. If B_L is greater than $SP \times (1 + H)$, then the vehicle lighting control signal to the vehicle lighting switch 45 is set low to turn off the vehicle's headlights and sidelights.

35

Additionally, if the photosensor array 32 and logic circuit 46 are both powered directly by the vehicle's

electrical system through the ignition switch, then a time delay t_d may be provided such that if the ignition switch is turned off when the headlight control signal is set high, the vehicle lighting control signal will
5 remain high for a time t_d and thereafter fall to a low value to turn off the vehicle's headlights and sidelights. A manual control may also be provided to allow the driver to adjust the time delay t_d .

10 The vehicle lighting control signal and, more specifically, the lighting control switch 45 may also be used to inhibit automatic control of the automatic rearview mirror system 20. For example, if the vehicle
15 lighting control signal indicates that the vehicle lighting should be turned off, then the logic and control circuit 34 may be used to enable sensitivity switch 42 or some other switch allowing the driver to manually adjust the reflectance level of the mirrors
20 28. Thus, the driver may manually select a lower reflectance level during daylight conditions to provide protection against peak light sources, such as a bright setting sun. As background light levels fall or during non-daylight conditions, the vehicle lighting control
25 signal would indicate non-daylight conditions and the logic and control circuit 34 may then be used to disable manual control and return the automatic rearview mirror system 20 to full automatic control.

Figure 6B shows another embodiment of a stand-alone
30 vehicle lighting control system, which has a number of the components identified with respect to Fig. 6. The vehicle lighting control system of Fig. 6B may also be integrated with automatic rearview mirror system and vehicle interior monitoring system described herein.
35 In Fig. 6B, however, the photosensor array 32 is directed generally forward of the vehicle so that it may sense a field of view forward of the rearview

mirror 1. The forward field of view is through the vehicle's front windshield and generally in line with the primary vehicle direction. In the embodiment of the vehicle lighting control system as described

5 herein, the photosensor array 32 comprises a plurality of photosensor elements 32a arranged in 160 columns and 120 rows (a 160x120 array) and has a forward field of view of approximately 50 degrees centered at the vehicle center line and a vertical field of view of

10 approximately 30 degrees, where the vertical field of view is approximately 10 degrees above and 20 degrees below the horizon in the forward field of view. It should be understood that the forward field of view may also be provided to the photosensor array 32 by using

15 any appropriate image directing optics or other appropriate means for directing a forward field of view onto the photosensor array 32 regardless of its orientation.

20 The logic and control circuit 34 processes the photosensor array signals corresponding to the forward field of view to determine an appropriate vehicle lighting configuration depending on the light information in the forward field of view. The methods

25 used by the logic and control circuit 34 to determine the appropriate vehicle lighting configuration are described below. After determining the appropriate vehicle lighting configuration, the logic and control circuit 34 generates and applies control signals to

30 headlight switches 29, which comprise a low beam mode switch 29a, a mid beam mode switch 29b and a high beam mode switch 29c, and to a vehicle running lights switch 31 and tail lights and side lights switches 35. Also shown in Fig. 6B is a sensitivity control circuit 41,

35 which may be used to control the level of hysteresis in the vehicle lighting control system, and manual vehicle

light switches 43 for manually controlling the vehicle lights.

The photosensor array 32 is preferably located within
5 the vehicle interior since this provides protection
against the outside elements, including dirt, moisture,
rain and snow, as well as reduced exposure to
ultraviolet light, and generally provides a relatively
controlled environment, including temperature
10 environment. It should be understood, however, that
the photosensor array 32 may also be located in one or
both of the external sideview mirrors 4 and 5, or in
any other appropriate location on the vehicle.

15 The methods defined for determining the change-limited
background light signal B_L may also be used to
determine a change-limited background forward light
signal B_{LF} that may be used to control the vehicle
lighting system. Also, the methods previously
20 described for determining and identifying peak light
levels may generally be used to determine and identify
whether there are other headlights and taillights in
the driver's forward field of view. The logic and
control circuit 34 uses this information to control
25 automatically the vehicle headlights (low beam, mid
beam and high beam modes) so as to limit the annoyance
or debilitation of other vehicle drivers forward of the
vehicle. The method for processing the forward field
of view image is the same as that shown through step
30 S140 in the flow chart of Fig. 7A, and is generally the
same as to steps S150 and S160 as detailed in the flow
chart Fig. 8A, except that steps S155, S156 and S162
are excluded. Figures 13A, 13B, 13C and 13D are the
flow charts that show the methods used by the logic and
35 control circuit 34 to determine the appropriate vehicle
lighting configuration and to control the vehicle

2025 RELEASE UNDER E.O. 14176

lighting system. The methods detailed in Figs. 13A, 13B, 13C and 13D may generally be described as follows:

- After the logic and control circuit 34 determines B_{LFR} ,
5 it determines whether B_{LFR} exceeds a threshold B_{DD} , which corresponds to the light level at dawn, dusk or a comparable lighting condition. If B_{LFR} exceeds B_{DD} , then a flag F_{DAY} corresponding to a daytime condition, which indicates that the vehicle running lights, if any, may
10 be turned on but that vehicle headlights and taillights should otherwise be off, and resets to zero flags F_{LOW} , F_{MID} and F_{HIGH} , which respectively correspond to the low, mid and high beam modes for the vehicle headlights. If B_{LFR} is less than B_{DD} and exceeds a threshold B_N , which
15 corresponds to a light level at night below which the mid or high beam modes may be operated, then the logic and control circuit 34 sets F_{LOW} to 1 and resets F_{DAY} , F_{MID} and F_{HIGH} .
- 20 If B_{LFR} is less than B_N , then the logic and control circuit 34 processes a mid zone, which corresponds to a Sub-Array $S(X)$ within the Array $PA(N,M)$ of the photosensor array 32. This mid zone or zone of interest represents an appropriate area of the forward
25 field of view image, in which the vehicle headlights may be set to their mid beam mode if there are no other vehicles as indicated by other vehicle light sources (headlights or taillights) within the mid zone. If there are no other vehicle light sources, then the
30 logic and control circuit 34 sets F_{MID} to 1 and resets F_{LOW} . Otherwise, F_{LOW} remains set, and the logic and control circuit 34 determines and processes the next set of photosensor element signals.
- 35 If, however, F_{MID} is set to 1, then the logic and control circuit 34 processes a high zone corresponding to the Array $PA(N,M)$. The high zone represents an

- appropriate area of the forward field of view image, in which the vehicle headlights may be set to their high beam mode if there are no other vehicle light sources within the high zone. If there are no other vehicle
- 5 light sources, then the logic and control circuit 34 sets F_{HIGH} to 1 and resets F_{MID} . Otherwise, F_{MID} remains set, and the system determines and processes the next set of photosensor element signals.
- 10 More complex vehicle lighting configurations may be controlled by determining an appropriate zone of interest for each available vehicle lighting mode or pattern.
- 15 Also, as discussed above with respect to the first embodiment of a vehicle lighting control system, hysteresis is used to moderate the frequency of transitions between the various beam modes and is reflected in Figs. 13A, 13B, 13C and 13D by low beam
- 20 counter LC, mid beam counter MC, high beam counter HC and night counter NC, each having corresponding hysteresis values LC1, MC1, HC1 and NC1, respectively. The hysteresis values may correspond to about 1 to 30
- 25 forward field of view image frames, and therefore correspond to a certain period of time since each image frame takes on the order of about 0.1 seconds to process. It should also be understood that in the described embodiment, hysteresis has only been provided for transitions from low to mid or mid to high
- 30 transitions, while transitions from high to mid or mid to low occur after the processing of only one image frame. Of course, hysteresis may also be used for transitions from high to mid or mid to low. Also, transitions to the initial low beam mode may be delayed
- 35 on the order of 15 seconds to five minutes, rather than occurring within one image frame as described herein. Further, in addition to or alternatively to hysteresis,

specific time delays of from about 1 to 15 seconds, or any other appropriate delay be used for transitions between beam modes.

5 Also, the vehicle driver may use the sensitivity control circuit 41 to adjust the level of hysteresis. The vehicle driver may also use the manual vehicle light switches 43 to override the vehicle lighting control system.

10

As discussed, Fig. 13A shows the initialization of the system and the initial low beam mode determination, Fig. 13B shows the initial mid and high beam mode determinations, Fig. 13C shows subsequent transitions
15 from the mid beam mode to either the low or high beam modes, and Fig. 13D shows subsequent transitions from the high beam mode to the mid and low beam modes.

As to Fig. 13A, in the initialization step S600, the
20 logic and control circuit 34 sets flag F_{Day} to 1, sets flags F_{Low} , F_{Mid} , F_{High} and F_N to 0, and sets counters LC, MC, HC and NC to 0.

Next, in step S610, the logic and control circuit 34
25 determines B_{Lr} as previously described. In step S620, if B_{Lr} is not less than B_{DD} , then the logic and control circuit 34 determines whether LC equals or exceeds LC1 in step S621. If LC is less than LC1, then LC is incremented in step S624 and the processing is returned
30 to step S610. If LC equals or exceeds LC1, then the logic and control circuit 34 in step S622 sets F_{Day} to 1, resets flags F_{Low} , F_{Mid} and F_{High} to 0 and also resets a flag F_{TSL} , which corresponds to the status of the vehicle tail lights and side lights. Next, in step
35 S623, the logic and control circuit outputs control signals to disable all vehicle night lights, including the headlights, side lights and tail lights.

If in step S620, B_{LFr} is less than B_{DD} , then the system goes to step S630. In step S630, if LC exceeds 0, then LC is decremented in step S631 and the system returns to step S610. If LC equals 0 in step S630, then the
5 logic and control circuit 34 sets F_{Day} to 0 in step S640, and then goes to step S650. In step S650, if B_{LFr} is not less than B_N , then the logic and control circuit 34 determines whether NC equals or exceeds NC1 in step S651. If not, then NC is incremented in step S653. If
10 yes, then NC is set to NC1 in step S652. In either case, F_N is then reset and the system goes to step S900. If B_{LFr} is less than B_N , the system goes to step S660. If NC exceeds 0 in step S660, then NC is decremented in step S661 and F_N is reset in step S662,
15 after which the system goes to step S900. If NC equals 0 in step S660, then F_N is set to 1 in step S670. Next, in steps S700 and S800, if F_{MD} and F_{HIGH} are not 1, then the system also goes to step S900. In step S900, F_{LOW} and F_{TSL} are set and LC is set to LC1. Next, in
20 step S910, the logic and control circuit 34 enables the tail and side lights (TSL) and low beam mode, and proceeds to step S920.

Next, Fig. 13B shows the logic for making an initial
25 transition from the low beam mode to the mid beam mode and for making an initial transition from the initial mid beam mode to the initial high beam mode. Thus, in step S920, if F_N equals 1, then the system returns to step S610. Otherwise, the logic and control circuit 34
30 processes the Sub-Array S(X) in step S930 to determine whether there are any other vehicles (OV) in S(X) in the forward field of view, as previously described. In step S940, if OV is in S(X), then MC and HC are reset in step S941 and the system returns to step S610. If
35 not, then the system goes to step S950. If MC does not equal or exceed MC1, then MC is incremented in step S951 and processing returns to step S610. Otherwise,

F_{MID} is set and F_{LOW} is reset in step S960, and the logic and control circuit 34 outputs control signals to enable the mid beam mode and disable the low beam mode in step S970. Next, in step S980, the logic and
5 control circuit 34 processes $PA(N,M)$ to determine if there are any other vehicles (OV) in $PA(N,M)$. In step S990, if OV is not in $PA(N,M)$, then HC is incremented and the system returns to step S610. Otherwise, F_{HIGH} is set and F_{MID} is reset in step S1000, after which the
10 logic and control circuit 34 outputs control signals to enable the high beam mode and disable the mid beam mode in step S1010, and the system returns to step S610.

As discussed, Fig. 13C shows the logic for making
15 transitions from the mid beam mode to either low or high beam modes. Thus, if F_{MID} equals 1 in step S700 of Fig. 13A, then the logic and control circuit 34 processes $S(X)$ for OV in step S710. If OV is in $S(X)$ in step S720, F_{LOW} is set and F_{MID} and MC are reset in
20 step S721, after which the logic and control circuit 34 outputs control signals to enable the low beam mode and disable the mid beam mode in step S722 and the system returns to step S610. If OV is not in $S(X)$ in step S720, then the logic and control circuit 34 processes
25 $PA(N,M)$ for OV in step S730. In step S740, if OV is in $PN(N,M)$, then HC is reset in step S741 and the system returns to step S610. Otherwise, in step S750, if HC does not equal or exceed $HC1$, then HC is incremented in step S751 and processing returns to step S610. If HC
30 equals or exceeds $HC1$ in step S750, then F_{HIGH} is set and F_{MID} is reset, after which the logic and control circuit 34 outputs control signals to enable the high beam mode and disable the mid beam mode in step S770 and then returns to step S610.

35

Finally, Fig. 13D shows transitions from the high beam mode to the mid beam and low beam modes. Thus, if F_{HIGH}

equals 1 in step S800 of Fig. 13A, then the system goes to step S810, in which the logic and control circuit 34 processes PA(N,M) for OV. In step S820, if OV is not in PA(N,M), the system returns to step S610.

- 5 Otherwise, F_{MID} is set and F_{HIGH} and HC are reset in step S830, after which the logic and control circuit 34 outputs control signals to enable the mid beam mode and disable the high beam mode in step S840. Next, in step S850, the logic and control circuit processes S(X) for
- 10 OV. In step S860, if OV is not in S(X), then the system returns to step S610. Otherwise, F_{LOW} is set and F_{MID} and MC are reset in step S870, after which the logic and control circuit 34 outputs control signals to enable the low beam mode and disable the high beam mode
- 15 in step S880 and then returns to step S610.

- Additionally, the above system may also be used to determine an appropriate vehicle lighting configuration and then controlling the vehicle lighting systems so as
- 20 to improve the driver's forward field of view. For example, by providing the photosensor array 32 with a forward field of view, the system may be used to recognize veiling glare caused by scattered light that may be caused by fog, snow, rain or other adverse
- 25 conditions. In particular, the logic and control circuit 34 may be used to determine a contrast factor representing the level of contrast within the forward field of view. This information may then be used to select the appropriate vehicle lighting configuration
- 30 so as to reduce the level of veiling glare.

- The system may also be used to monitor varying windshield surface conditions caused by condensation, dirt, rain or snow. In particular, the system may be
- 35 used to identify these conditions by analyzing the forward field of view image frames for distortion, or degradation. This capability may be enhanced by using

infra-red supplemental source illumination (SSI) having wavelengths within the responsive range of the photosensor array 32.

- 5 More particularly, since the photosensor array 32 may have a forward field of view that includes at least the windshield area, which is swept by the windshield wipers, the logic and control circuit 34 may be used to generate control signals to operate the vehicle's
10 windshield wiper system, windshield washer system, defogger system or windshield de-icing system so as to improve forward viewing conditions.

- Also, for a forward field of view, the photosensor
15 array 32 may be used to generate image frame data that controls or supplements the control of vehicle collision avoidance systems or other automatic vehicle systems using forward field of view information. Additionally, since the photosensor array 32 responds
20 to a portion of the non-visible electromagnetic spectrum, as previously described, it may be used to receive non-visible, spatially or time varying data from objects in the forward field of view, such as vehicles or road signs having an infra-red source
25 emitter, and to provide vehicle-to-vehicle or road-to-vehicle communications, which may be used to support intelligent vehicle and highway systems (IVHS), which are designed to improve road travel safety and efficiency.

30

VII. The Automatic Rearview Mirror And Vehicle Interior Monitoring System

- Figure 10 also shows the automatic rearview mirror
35 system 20 of the present invention. The system 20 is powered by the vehicle's electrical system (not shown) to which the system 20 is connected. A voltage regulation and transient protection circuit 22

regulates power and protects the system 20 from voltage transients as is well known in the art. The circuit 22 is connected to the vehicle's electrical system and to ground, and outputs a voltage of up to about 5 volts to
5 power the mirror drive circuits 24 and the light sensing and logic circuit 26. The circuit 22 also has a ground line connected to the light sensing and logic circuit 26.

10 The 5 volt line is also connected to the force-to-day switch 36 and the reverse-inhibit switch 38 (connected in parallel to the light sensing and logic circuit 26) which are used to force the mirrors 28 to their maximum reflectance level. More particularly, when either of
15 these switches is closed, they generate a high level signal V_H such as a 3 volt signal, which is input to the light sensing and logic circuit 26. This high level signal overrides the normal operation of the light sensing and logic circuit 26 causing it to output
20 a control signal to the drive circuits 24 to drive the mirrors 28 to their maximum reflectance level. Conversely, when these switches are open, they each generate a low level signal V_L such as a signal of less than 3 volts, thereby permitting normal operation of
25 the light sensing and logic circuit 26, as has been discussed with respect to Figs. 7, 8A and 8B. The force-to-day switch 36 and the reverse-inhibit switch 38 may be alternatively configured to generate a low level signal when closed and a high level signal when
30 open. The force-to-day switch 36 is a manually operated switch and is preferably placed on the rearview mirror 28a and may be switch 3. The reverse-inhibit switch 38 is connected to a reverse inhibit line in the vehicle's electrical system (not shown) so
35 that the reverse-inhibit switch 38 is actuated automatically whenever the vehicle is in reverse gear.

The force-to-night switch 40, used to force the mirrors 28 to their minimum reflectance level, generates a high level signal V_H when closed and a low level signal V_L when opened. The signal V_H or V_L is then input to the light sensing and logic circuit 26. The high level signal may, for example, be between 3 to 5 volts and the low level signal may be below 3 volts. The high level signal overrides the normal operation of the light sensing and logic circuit 26, as discussed with respect to Figs. 7, 8A and 8B, causing the circuit 26 to output a control signal to the drive circuits 24 to drive the mirrors 28 to their minimum reflectance level. The low level signal, on the other hand, permits normal operation of the light sensing and logic circuit 26. Alternatively, the force-to-night switch 40 may be configured to generate a low level signal when closed and a high level signal when open. The force-to-night switch 40 is also a manually operable switch, preferably located on the rearview mirror 28a, and may also be switch 3.

The light sensing and logic circuit 26 is also connected to the sensitivity control circuit 42. The circuit 42 enables the operator to manually adjust the sensitivity of the mirrors 28 using the switch 3 (shown in Figs. 1A and 1B). The sensitivity control circuit 42 (switch 3) may comprise a potentiometer whose voltage may be varied from zero to five volts. Alternatively, a single resistor may be used to provide a single preset sensitivity setting that cannot be changed by the driver.

As previously discussed with respect to Figs. 5 and 6, the light sensing and logic circuit 26 comprises the photosensor array 32 (or other light sensing device) and the logic and control circuit 34. These two devices may be either separate or commonly located on a

single semiconductor substrate. The light sensing and logic circuit 26 is preferably a single VLSI CMOS circuit.

5 Also shown in Fig. 10, the light sensing and logic circuit 26 outputs analog mirror control signals having voltages varying from zero to approximately 5 volts to the mirror drive circuits 24 and a vehicle lighting control signal of 0 to 5 volts to the vehicle lighting
10 switch 45. Alternatively, as previously discussed the light sensing and logic circuit 26 may output a 5 volt pulse-width-modulated (PWM) signal to the mirror drive circuits 24. The mirror drive circuits 24 then generate and apply drive voltages varying from a low
15 voltage on the order of 0 volts to a high voltage on the order of 1 volt to drive the mirrors 28. The actual driving voltage (or current) may, of course, be significantly lower or higher depending on the variable reflectance mirror element 1a used.

20 Each of the mirrors 28 preferably comprises a reflective electrochromic (EC) cell whose reflectance level may be varied from a maximum of anywhere from approximately 50 to 90 percent to a minimum of
25 approximately 4 to 15 percent, and having a maximum driving voltage on the order of about 1 to 2 volts. As is well known in the art, electrochromic devices change their reflectance level when a voltage or other appropriate drive signal is applied to the
30 electrochromic device. The mirrors 28 alternatively may comprise any other suitable variable reflectance mirror.

As previously discussed, it is also within the scope of
35 the present invention for the light sensing and logic circuit 26 to be located remotely from the mirrors 28 of the system 20. However, depending on vehicle design

and styling requirements, it may be preferred that the light sensing and logic circuit 26 be integral with the rearview mirror 28a such that: (1) the center line of the field of view of the photosensor array 32 is
5 substantially perpendicular to the reflective surface of the rearview mirror 28a; and (2) the horizontal field of view of the photosensor array 32 is aligned with the horizontal axis of the rearview mirror 28a. As a result, the photosensor array 32 receives the
10 light that will be incident on the rearview mirror 28a as shown in Fig. 6.

As has been discussed, the automatic rearview mirror system containing the photosensor array 32 may be
15 extended to include a vehicle interior monitoring system configured as a vehicle intrusion detection system by vertically extending the effective field of view of the photosensor array 32 and by providing vehicle intrusion detection logic in the logic circuit
20 26. Importantly, the automotive rearview mirror and vehicle interior monitoring systems do not have to function simultaneously in both the vehicle intrusion detection mode and automatic rearview mirror mode. Therefore, the operation of the vehicle intrusion
25 detection mode may be described independently of the operation of the automatic rearview mirror mode. As is described further below, a switch is used to input a mode select signal to the logic circuit 46 to select the desired operating mode.

30

In the vehicle intrusion detection mode, those photosensor elements 32a corresponding to the image segment below the lower edge of the vehicle window areas (i.e., the image information of Fig. 2A excluding
35 the image information Figs. 3A and 3B) are considered significant. Each photosensor element 32a is associated with a small and unique portion of the

imaged scene. In particular, each photosensor element 32a senses light within its own image cone. For the preferred photosensor array 32, each photosensor element 32a is responsive to an area approximately one
5 (1) inch square at 100 inches, which is about the maximum distance from the photosensor array 32 mounted in the rearview mirror 1 to most vehicle cabin interior surfaces within the area of interest. For the photosensor array 32 described above, one set of about
10 6,400 (160 x 40 sub-array) photosensor elements 32a are used in the automatic rearview mirror mode and another set of about 12,800 (160 x 80 sub-array) photosensor elements 32a are used in the vehicle intrusion detection mode. The ability of the photosensor array
15 32a to resolve the area of interest into a number of data values and to select particular image information, while ignoring other image information, is significant and distinguishes this vehicle intrusion detection system from other vehicle intrusion detection systems
20 and technologies.

The automatic rearview mirror and vehicle interior monitoring system as shown in the schematic block diagram of Figure 10A is identical to the automatic
25 rearview mirror system shown in the schematic block diagram of Figure 10 except as follows. First, as explained above, the array size required for an independent automatic rearview mirror system must be expanded from 160 x 40 to 160 x 120 to provide a larger
30 effective field of view that includes most of the vehicle interior 100. Second, additional logic or control circuitry is incorporated in logic circuit 46 to process the vehicle intrusion detection logic of Figs. 12 and 12A. The light sensing and logic circuit
35 26 includes additional control input lines for the "arming" and "alerting" control input signals and control output lines to interface with vehicle hardware

or vehicle controller systems. Finally, the regulation and transient protection circuit 22 also has an additional vehicle power supply line (12V BATTERY), and a switch or other logic for providing a mode select
5 signal that is input to the light sensing and logic circuit 26.

Normally, power is provided to vehicle hardware through the ignition switch controlled power supply circuits to
10 avoid battery drain. Since the automatic rearview mirror system operates when the vehicle is being driven, it is normally connected to an ignition switch controlled power supply circuit as shown in Fig. 10. Since the vehicle intrusion detection system operates
15 when the ignition switch is off, the regulation and transient protection 22 includes the additional vehicle battery power supply line for supplying power directly from the vehicle battery. The regulation and transient protection circuit 22 also includes a switch or other
20 logic circuit (not shown) to output a mode select signal to the light sensing and logic circuit 26. The mode select signal is low (0 volts) when power is not available through the ignition switch controlled power supply circuit and high (5 volts) when it is.

25

The light sensing and logic circuit 26 includes an input line to receive an "arming" input signal 49a to actively arm the vehicle intrusion detection system.

30 Although not shown in Fig. 10A, other vehicle systems are typically used to supply an "arming" input signal. Such systems may be actuated by using conventional infrared or RF type remote control or by the activation of central door locking systems using the door key or
35 entry combination keypad.

The light sensing and logic circuit 26 also includes input lines to receive an "alert" input signal(s) 49b to increase the sampling rate, such as when a trunk lid opening has been detected and increased monitoring may be required. The light sensing and logic circuit 26 also includes one or more output signal lines to the vehicle hardware 45a and/or to the vehicle controller system 48, for activating the horn and lights or disabling the ignition control device. The control output signal is normally low (0 volts) and goes high (5 volts) when there is an intrusion condition, but may also be a data word providing more detailed information, (such as the location of the intrusion) to the vehicle controller system.

When power is supplied to the automatic rearview mirror system through the ignition switch controlled power supply circuit, the regulation and transient protection circuit 22 outputs a high (5 volts) mode select signal to the logic circuit 46. This causes it to select the automatic rearview mirror mode and the system functions as an automatic rearview mirror system as previously described.

When the ignition switch is turned off, the mode select signal goes low (0 volts) and the logic circuit 46 sets the system to a low power mode, in which the logic circuit 46 only monitors the status of the mode select and "arming" control input signals. In this state, the vehicle intrusion detection mode is available, but the system is not "armed" and it is not monitoring the vehicle cabin. When in this state and when the "arming" control input signal is active, then the logic circuit 46 enters the vehicle intrusion detection mode described with respect to Figs. 12 and 12A.

As previously described, in step S301, the logic circuit 46 initializes the system (e.g., resets the counters, etc., used in the automatic rearview mirror mode) and sets EP to its maximum value and SSI to its minimum level. Since the lighting levels are not known and may be at any level within the full operating range of the system at the time of arming, the system must determine the optimum combination of EP and SSI by maximizing the number of photosensor elements 32a providing useful image data. To minimize system power consumption, the method is biased to minimize SSI and maximize EP. In step S310, the status of the mode select, "arming" and "alerting" signals is monitored to confirm the appropriate operating mode. For example, if the "arming" signal goes inactive, then the system returns to a disarmed, low power mode and only monitors the mode select and "arming" signals. If there is no status change, then the system generates and stores $RA_{(t)}$ (using steps S101 to S140 of Fig. 7). The logic circuit 46 ignores RAM array data corresponding to the 160 x 40 array of photosensor elements 32a generally associated with the window areas as shown in Figs. 3A and 3B, and processes the RAM array data corresponding to the 160 x 80 array of photosensor elements 32a generally associated with the vehicle cabin interior generally excluding the window areas of Figs. 3A and 3B. It should be understood that a trapezoidal sub-set of RAM array data, corresponding to the same sub-set of photosensor elements 32a, may be selected so as to better correspond to the vehicle cabin interior excluding the window areas.

In step S320, the logic circuit 46 determines AR by calculating the average value of all the values in the selected sub-set of RAM array data. In the system described, AR may be in they range 0 to 255 (8-bit data resolution), but it is preferably at the operating

point OP of 127 (mid-point of the range); however, for system stability purposes the range factor R results in an operating point OP range of 127 ± 20 . In step S330 and S360, it is determined whether AR is in the range

5 OP \pm R. If AR is outside the range, then EP and SSI are incrementally increased or decreased according to steps S341, S342 or S351, S352. This is repeated for every image data frame. The system thus optimizes EP and SSI for the particular circumstances at system

10 startup, and thereafter continues to adjust EP and SSI to maintain AR within the range OP \pm R as lighting conditions change. If AR is within the range, then the program enters the primary task S400 in block S370.

15 The vehicle intrusion detection system is designed to be responsive or sensitive to movement or motion within the vehicle interior 100 and insensitive to changes in general lighting conditions, moving shadows, etc. The system does this by reducing every image data frame to

20 its robust and unique characteristics, largely unaffected by random light sources or changes in general lighting conditions. After sufficient image data frames have been processed to allow electrical stabilization and optimization of EP and SSI, the

25 contour enhanced image data frame RC₍₀₎ is stored as the reference image data frame. Every image data frame is processed in the same way as the reference image and is then compared to the reference image. Decisions are reached after several images have been compared

30 producing the same result. Three conclusions are possible after comparing images in the manner described. Images may be essentially the same, significantly different or neither similar enough nor different enough to make a decision. If this first

35 condition exists for long enough, changes to the reference image are considered. Confirmation of the

differences over several images result in a concluded intrusion.

More particularly, in step S401, the logic circuit 46
5 converts $RA_{(0)}$ to its contour enhanced form $RC_{(0)}$ by
calculating the average difference between the value of
 $RA_{(0)}$ for each element $E(n,m)$ and each of its eight (8)
neighbors. As discussed, at system start-up, the
system must electrically stabilize and must also adjust
10 EP and SSI to optimize the image data frame stored as
 $RC_{REF(0)}$. This is done by cycling at least several times
from step S310 through steps S403 and S404 and then
returning to step S310. In step S404, the image data
frame $RC_{(0)}$ is stored in RAM 50 as $RC_{REF(0)}$ so that $RC_{(0)}$ and
15 $RC_{REF(t-1)}$ are available in step S402 in RAM 50 for
comparison. In step S402, the correlation factor IC
for $RC_{(0)}$ and $RC_{REF(t-1)}$ is determined. During this start-up
period, EP and SSI become stable.

20 In step S403, the start-up criteria are tested, as
previously described, and if the count is greater than
25 and the images $RC_{(0)}$ and $RC_{REF(t-1)}$ correlate (IC exceeds
0.95), then the system continues through step S405.
Otherwise, it continues through step S404 until the
25 image is stable. In the normal monitoring mode, IC is
tested against T_1 in step S405, where T_1 is 0.6 (T_1 may
be less than 0.6). If the degree of correlation or
correspondence between the current and reference image
data frames is poor (IC is less than 0.6), then the
30 image data frames are judged to be sufficiently
different to suggest that vehicle intrusion has
occurred. Vehicle intrusion detection systems are
evaluated on their ability to detect intrusion
conditions and to avoid false intrusion conditions. To
35 avoid false intrusion conditions, in step S408, the
number of successive mismatch conditions is counted and
compared to a preset value of 20 (which may be in the

range 2 to 300), and a valid intrusion detection condition is established in step S408 after 20 successive mismatch conditions. In step S409, the logic circuit 46 outputs control signals to vehicle hardware 45a or to the vehicle controller system 48 for further processing, which may result in an alarm sounding, vehicle immobilization or other appropriate action. The system continues to monitor the vehicle interior or compartment by returning to step S310. If the number of successive mismatch conditions falls below 20 in step S408, then the system returns to step S310.

In step S405, if IC is greater than 0.6, then the images are not sufficiently different to confirm an intrusion condition. It is desirable to update the reference image data frame $RC_{REF(t)}$ if changes occur due to minor and slowly changing conditions outside the vehicle, such as changing light levels or slowly moving shadows due to the sun tracking across the sky. Accordingly, in step S406, IC is compared to T_2 (where T_2 is 0.95 but may be in the range 0.95 to 1), and if IC exceeds T_2 , then the logic circuit 46 updates and stores the reference image data frame $RC_{REF(t)}$ in step S407. The logic circuit 46 may replace $RC_{REF(t-1)}$ with $RC_{(t)}$ or modify $RC_{REF(t-1)}$ as previously described. The system continues to monitor the vehicle interior by returning to step S310 until the "arming" control input signal goes inactive.

It should be understood that the larger field of view provided by the 160 x 120 array of the vehicle intrusion detection system enables further analysis of the rearward scene. Specifically, the background light signal B_i may be determined using a larger set of photosensor array elements 32a. The combination of the automatic rearview mirror detection system and vehicle intrusion detection system additionally provides an

opportunity for using SSI to illuminate the vehicle interior under dark conditions for the purpose of precise identification of specific vehicle features such as those indicated in Fig. 2A.

5

Vehicle feature identification is useful in the automatic rearview mirror system because it allows the logic circuit 46 to select each of the sub-arrays S(X) of photosensor elements 32a corresponding to zones a, b and c indicated in Figs. 3A and 3B. This is useful when the photosensor array 32 is positioned in the rearview mirror 1. Active adjustment allows the logic circuit 46 to select sets or sub-arrays S(X) of photosensor elements 32a such that zones a, b and c are indicative of identical vehicle regions independently of driver rearview mirror 1 adjustment.

Finally, to minimize battery power drain, the system described may be operated in a low power mode by reducing the sampling rate at which images are obtained and processed, such as one image data frame per second. However, if the logic circuit 46 receives an "alerting" control input signal such as may be received from a vibration, motion, trunk lid or door opening sensor, then the system described herein may return to its normal sampling rate. Alternatively, this may also be achieved by having the system use the lower sampling rate until the logic circuit 46 establishes a poor image correlation (i.e., $IC < 0.6$) in step S406 and selects the higher sampling rate.

The vehicle interior monitoring system may also be configured as a compartment image data storage system to store any compartment image, such as the driver image, in the nonvolatile memory 57. The automatic rearview mirror and vehicle interior monitoring system configured as a compartment image data storage system

is shown in the schematic block diagram of Fig. 10A and the previous description of Figs. 10 and 10A applies except as follows. First, in the specific embodiment described herein, the light sensing and logic circuit 5 26 does not use control input lines for receiving the "arming" control input signal 49a and the "alerting" control input signal(s) 49b as in the vehicle intrusion detection system. Second, the additional vehicle power supply line (12V BATTERY) and mode select signal line 10 are also not used in the specific embodiment described herein. This is because the compartment image data storage system may be limited to operating when the vehicle has been started since both authorized and unauthorized drivers actuate the ignition switch to 15 start the vehicle (the vehicle thief may, of course, break the steering column ignition lock system to do this). Thus, power is always supplied through the ignition switch controlled power supply (12V IGNITION) when the vehicle is started. Finally, the light 20 sensing and logic circuit 26 includes input/output lines to interface with the nonvolatile memory/data access logic and port 65, which comprises the nonvolatile memory 57, access/security decoding logic 58 circuit and data access part 59 of Fig. 6A. To 25 reduce data storage requirements, the image data frame may be compressed using any appropriate digital image compression technique as discussed with respect to Fig. 6A. The image data frame is then stored in the nonvolatile memory 57, such as an EEPROM or any other 30 appropriate nonvolatile memory, which has sufficient storage to store a predetermined number of image data frames.

The compartment image data storage system may be 35 configured to store a single image data frame in the nonvolatile memory 57 for each ignition cycle. When power is supplied to the automatic rearview mirror

system through the ignition switch controlled power circuit, the regulation and transient protection circuit 22 supplies 5 volts to the light sensing and logic circuit 26, which begins system initialization for a set period of between zero (0) seconds and two (2) minutes, but preferably 30 seconds. This delay condition or wait state reduces the opportunity for vehicle thieves to detect SSI which may be emitted during the image optimization process of Figure 12.

After the wait state has ended, the compartment image data storage system operates as has already been described with respect to Figs. 12A and 12B. The nonvolatile memory 57 should be sufficiently large to store a number N of valid image data frames $RA_{(i)}$ to document N sequential ignition cycles where N is in the range of 2 to 10, but is preferably 5. The image data frames are addressed via pointers that select a general memory location which are used to store each valid image data frame $RA_{(i)}$. The pointer addressing scheme is cycled on a first-in-first-out (FIFO) basis so that the most recent valid image data frames replace the "oldest" image data frames in the nonvolatile memory 57. After storing a valid image data frame $RA_{(i)}$, the system ends cycling and enters a dormant state waiting for the next ignition cycle.

Alternatively, multiple valid image data frames may be stored for a single ignition cycle. This second version of the compartment image data storage system performs exactly as the first description except as follows. After storage of the initial image data frame, the system returns to step S310 and the logic circuit 46 generates a random wait state ranging from 8 to 15 minutes during which the system stops generating image data frames. After the wait state has ended, the system proceeds to attempt generate another valid image data frame. This cycle of randomly waiting and then

attempting to generate valid image data frames is continued as long as the ignition supplies power to the system. This approach is more difficult for thieves to defeat. This system may also be configured as a real-time image data storage system (e.g., 30 frames per second). Of course, since at least several hundred image data frames may need to be processed, compressed and stored in the nonvolatile memory 57, the processing and nonvolatile memory storage requirements are significantly greater than for the other image data storage systems described above. An initiation sensor, such as accelerometers, motion sensors, vibration sensors or any other sensor capable of detecting vehicle motion, inputs an initiation signal, and after receiving the initiation signal, the light sensing and logic circuit 26 generates and stores in real-time the image data frames for a predetermined period, such as 10 seconds.

The nonvolatile memory 57 is preferably housed in a separate module in a physically difficult to access location within the vehicle, such as high on the fire wall behind the instrument cluster. The module is preferably a durable metal housing or other housing sufficiently durable so that it will protect the nonvolatile memory 57 from extreme shock or heat, such as might occur in a vehicle accident. To better ensure that the image data frames in the nonvolatile memory 57 are not accessed by unauthorized personnel, access may be limited by the security access/decoding logic 58. The security access codes necessary to access the image data frames may, for example, be distributed only to authorized persons. When the proper security access code is entered, the image data frames may be accessed through the access port 59; typically, the access port 59 is a multi-pin connector to which a data retrieval system may be connected.

It should be understood that the vehicle interior monitoring system described above, including the vehicle intrusion detection system and the compartment image data storage system configurations, may be
5 implemented as an independent or stand-alone system in a module (without the automatic rearview mirror system), and that it may be mounted independently within the vehicle, such as in the headliner, headliner console or other appropriate areas.

10

The performance of the vehicle interior monitoring systems described herein may be enhanced by providing enhanced infrared reflectance characteristics in certain areas within the vehicle interior 100. For
15 example, some fibers (such as cotton and silk) tend to reflect near infrared illumination better than other fibers (such as nylon and rayon) which tend to absorb near infrared illumination. Therefore, a pattern may be established in the vehicle interior 100 such as on
20 the driver seat 101 or passenger seat 102 or front or rear seats or on the vehicle's interior door panels, etc., by using different fibers or other materials to establish a pattern, such as a grid or any other appropriate pattern. Near infrared illumination of the
25 pattern provides a higher contrast image to the photosensor array 32. This better ensures that the logic circuit 46 accurately determines, for example, the presence of an intruder, an occupant or other object (such as a child restraint system in the front
30 passenger seat).

Using fibers or materials having better infrared reflectance characteristics as described above is useful both during the day and at night. During the
35 day, any near infrared reflective pattern in the vehicle will generally provide a higher contrast pattern to the photosensor array 32 because of natural

2025 RELEASE UNDER E.O. 14176

sources (sunlight) or supplemental sources of near infrared of illumination. In particular, if light levels fall below some predetermined level (typically in the range of about 0.1 lux to 5 lux), then near
5 infrared SSI may be used to provide a higher contrast image pattern to the photosensor array 32.

The vehicle interior monitoring system may also be used to monitor the vehicle interior 100 to determine
10 whether there is an adult occupant, a child restraint system or no occupant in the front or rear passenger seat areas. Various mechanical and electrical sensors have been considered or used for detecting or sensing the size and presence of vehicle occupants,
15 particularly those in the front passenger seat. These sensors include pressure sensors (mechanical and solid-state), accelerometers, ultrasonic sensors and mechanical or electrical switch mechanisms for indicating seat belt use. As air bags are becoming
20 more prevalent, vehicle owners, insurance companies and automotive companies have a strong interest in having air bags deploy properly at all times, since replacing deployed airbags is costly. Additionally, there has been some discussion as to whether air bags should
25 deploy when there is a child restraint system that is positioned rearwardly facing in the front passenger seat. Since performance requirements are stringent for safety related components, it is problematic to make appropriate airbag deployment decisions using currently
30 known sensor technologies. The vehicle interior monitoring system may be configured as a vehicle occupant detection system that may be used to aid in the intelligent deployment of air bags depending, for example, on the status of the vehicle occupant. Image
35 information, such as size, shape, contour and motion may be processed by the logic circuit 46 to determine whether to output a control signal to the air bag

deployment system to prevent an air bag from deploying (such as a passenger air bag when there is no front seat passenger) or for controlling the rate at which the airbag deploys.

5

The individual components represented by the blocks shown in the schematic block diagrams of Figs. 6, 6A, 6B, 10 and 10A are well known in the art relating to automatic rearview mirrors, vehicle lighting systems and vehicle intrusion detection systems, and their specific construction and operation is not critical to the invention or the best mode for carrying out the present invention. Moreover, the logic flow charts discussed in the specification and shown in Figs. 7, 8A, 8B, 12, 12A, 12B, 13A, 13B, 13C and 13D may be implemented in digital hardwired logic or programmed into well-known signal processors, such as microprocessors, by persons having ordinary skill in the art. Since such digital circuit construction or programming per se is not part of the invention, no further description thereof is deemed necessary.

While the present invention has been described in connection with what are the most practical and preferred embodiments as currently contemplated, it should be understood that the present invention is not limited to the disclosed embodiments. Accordingly, the present invention is intended to cover various modifications and equivalent arrangements, methods and structures that are within the spirit and scope of the claims.

WHAT IS CLAIMED IS:

1. An automatic rearview mirror system for an automotive vehicle comprising:

at least one variable reflectance rearview mirror;
an array of sensing elements to sense light levels in an area rearward of said at least one variable reflectance rearview mirror, each of said sensing elements adapted to sense light levels of light incident thereon and to output an electrical signal indicative of said sensed light levels;

a signal processor, connected to said array of sensing elements, receiving and using the electrical signals indicative of the sensed light levels from said sensing elements to determine a first electrical signal indicative of a background light level in the area rearward of said at least one variable reflectance rearview mirror and to determine a second electrical signal indicative of at least one peak light level in the area rearward of said at least one variable reflectance rearview mirror,

wherein said signal processor determines at least one control signal indicative of the desired reflectance level of the at least one variable reflectance rearview mirror from the first electrical signal indicative of the background light level and the second electrical signal indicative of the at least one peak light level; and

at least one drive circuit connected to said signal processor and to said at least one variable reflectance rearview mirror for receiving said at least one control signal and generating and applying at least one drive signal to said at least one variable reflectance rearview mirror to drive said at least one variable reflectance mirror to the desired reflectance level.

660070 THE FCB

2. The automatic rearview mirror system defined by Claim 1, further comprising an imaging system to focus an image of the area rearward of said at least one variable reflectance rearview mirror onto said array.
3. The automatic rearview mirror system defined by Claim 2, wherein said imaging system comprises a lens.
4. The automatic rearview mirror system defined by Claim 3, further comprising a semiconductor substrate on which said array of sensing elements is formed.
5. The automatic rearview mirror system defined by Claim 4, wherein said imaging system is constructed integrally with said array of sensing elements.
6. The automatic rearview mirror system defined by Claim 5, wherein said array of sensing elements and said signal processor are constructed on said semiconductor substrate as an integrated circuit.
7. The automatic rearview mirror system defined by Claim 1, wherein said at least one variable reflectance rearview mirror is an electrochromic mirror.
8. The automatic rearview mirror system defined by Claim 1, wherein said signal processor is an integrated circuit.
9. The automatic rearview mirror system defined by Claim 1, further comprising a memory, connected to said array and to said signal processor, receiving and storing the electrical signals output by said sensing elements, wherein said signal processor receives the electrical signals stored in said memory.

10. The automatic rearview mirror system defined by Claim 9, wherein said memory is a random-access-memory.

11. The automatic rearview mirror system defined by Claim 1, wherein said signal processor is a microprocessor.

12. The automatic rearview mirror system defined by Claim 1, further comprising a memory, connected to said array and said signal processor, receiving and storing the electrical signals output by said sensing elements,

wherein said signal processor receives the electrical signals from said memory to determine the first and second electrical signals and stores the first and second electrical signals in said memory,

wherein said signal processor receives the first and second electrical signals from said memory to determine the at least one control signal.

13. The automatic rearview mirror system defined by Claim 1, wherein said signal processor determines said second electrical signal indicative of at least one peak light level in at least one zone of said area rearward of said at least one variable reflectance rearview mirror.

14. The automatic rearview mirror system defined by Claim 13,

wherein said signal processor determines a plurality of the second electrical signals indicative of a plurality of peak light levels, wherein each of the second electrical signals correspond to at least one zone of the area rearward of said at least one variable reflectance mirror, and

wherein said signal processor determines and outputs a corresponding plurality of the control

668070 "THE E330"

signals based on the first and the plurality of second electrical signals.

15. The automatic rearview mirror system defined by Claim 1, wherein said signal processor samples the electrical signals indicative of the sensed light levels at a substantially constant sampling rate and varies the exposure time depending on the background light level in the area rearward of said at least one variable reflectance rearview mirror.

16. The automatic rearview mirror system defined by Claim 1, wherein said array of sensing elements is a photosensor array and said sensing elements are photosensor elements arranged in a two-dimensional array of rows and columns, wherein each of said photosensor elements generates a photosensor element signal indicative of the light levels of light incident thereon.

17. The automatic rearview mirror system defined by Claim 1, wherein said at least one variable reflectance rearview mirror comprises a plurality of segments each of whose reflectance is independently controllable by said signal processor, and wherein said signal processor controls each of the segments of said at least one variable reflectance rearview mirror using the electrical signals from a corresponding set of sensing elements of said array.

18. The automatic rearview mirror system defined by Claim 16, wherein said signal processor determines the first electrical signal indicative of the background light level by calculating an average of the photosensor element signals indicative of the light levels of light incident on said photosensor elements in the lowest X rows of said photosensor array, wherein

X is a positive integer less than the number of rows in said photosensor array.

19. The automatic rearview mirror system defined by Claim 16, wherein said signal processor determines the first electrical signal indicative of the background light level by calculating an average of X percent of the photosensor element signals indicative of the light levels of light incident on said photosensor elements, where X is a positive number.

20. The automatic rearview mirror system defined by Claim 19 wherein X is approximately 100.

21. The automatic rearview mirror system defined by Claim 16, wherein said signal processor determines the first electrical signal indicative of the background light level by calculating an average of X percent of photosensor element signals indicative of the lowest light levels of light incident on said photosensor elements, wherein X is a positive number.

22. The automatic rearview mirror system defined by Claim 21, wherein X is between approximately 5 and 100.

23. The automatic rearview mirror system defined by Claim 21, wherein X is approximately 75.

24. The automatic rearview mirror system defined by Claim 16, wherein said signal processor determines the second electrical signal indicative of the at least one peak light level by determining the average value of Y percent of photosensor element signals indicative of the highest light levels of light incident on a predetermined set of said photosensor elements, wherein Y is a positive number.

25. The automatic rearview mirror system defined by Claim 24, wherein Y is in the range of from approximately 1 to 25.

26. The automatic rearview mirror system defined by Claim 24, wherein Y is approximately 10.

27. The automatic rearview mirror system defined by Claim 16, wherein said signal processor determines said control signal according to the formula:

$$V_c(z) = V_1 + (R_1 - S \times C_T \times B/P(z)) \times (V_2 - V_1)/(R_1 - R_2),$$

wherein V_c is the voltage of the at least one control signal determined by said signal processor, V_1 is the approximate voltage which, when applied to said at least one variable reflectance rearview mirror, causes said at least one variable reflectance rearview mirror to begin perceptibly decreasing its reflectance from its maximum reflectance level R_1 , S is a sensitivity factor, C_T is the maximum contrast ratio of the peak light level to the background light level, B is the background light level, $P(z)$ is the at least one peak light level, and V_2 is the approximate voltage which, when applied to said at least one variable reflectance rearview mirror, causes said at least one variable reflectance rearview mirror to decrease its reflectance to approximately its minimum reflectance level R_2 .

28. The automatic rearview mirror system defined by Claim 16, wherein said signal processor tests the photosensor element signal output from each photosensor element to determine whether the photosensor element signal output from each photosensor element is indicative of a peak light level or a background light level.

29. The automatic rearview mirror system defined by Claim 28, further comprising an imaging system comprising a lens to focus an image of the area rearward of said at least one variable reflectance rearview mirror onto said photosensor array of photosensor elements, wherein said system further comprises means for applying a lens correction factor to each photosensor element signal output from each photosensor element.

30. The automatic rearview mirror system defined by Claim 29, wherein the lens correction factor is in the range of approximately 1 to 15.

31. The automatic rearview mirror system defined by Claim 28, wherein said signal processor determines a value indicative of the light level sensed by each photosensor element and compares each determined value with a predetermined peak threshold value to determine whether the photosensor element signal output from each photosensor element is indicative of a peak light level or a background light level.

32. The automatic rearview mirror system defined by Claim 31,

wherein said signal processor determines that a photosensor element signal output from one of said photosensor elements is indicative of a background light level when the determined value indicative of the sensed light level of said one of said photosensor elements is not greater than the peak threshold value, and

wherein said signal processor determines that a photosensor element signal output from said one of said photosensor elements is indicative of a peak light level when the determined value indicative of the

sensed light level of said one of said photosensor elements is greater than the peak threshold value.

33. The automatic rearview mirror system defined by Claim 32, wherein the peak threshold value is in the range of approximately 200 to 255.

34. The automatic rearview mirror system defined by Claim 31, wherein said signal processor determines the first electrical signal, indicative of a background light level by summing the determined values determined to be not greater than the peak threshold value and dividing the resulting sum by the number of determined values determined to be not greater than the peak threshold value.

35. The automatic rearview mirror system defined by Claim 32, wherein said signal processor counts the number of determined values greater than the peak threshold value in a predetermined set of determined values corresponding to a predetermined set of photosensor elements and determines the second electrical signal indicative of the at least one peak light level in the area rearward of said at least one variable reflectance rearview mirror as a function of the number of determined values greater than the peak threshold value in the predetermined set of determined values.

36. The automatic rearview mirror system defined by Claim 31,

wherein said photosensor array means is located in said at least one variable reflectance rearview mirror so as to receive light through an active layer of said at least one variable reflectance rearview mirror from the area rearward of said at least one variable rearview reflectance mirror, and

wherein said signal processor applies a color correction factor to each value indicative of the sensed light level for each photosensor element to compensate for the reduction in transmitted light levels when the reflectance level of said at least one variable reflectance rearview mirror is reduced.

37. The automatic rearview mirror system defined by Claim 16,

wherein said signal processor uses the first electrical signal to determine a third electrical signal indicative of a change-limited background light level in the area rearward of said at least one variable reflectance rearview mirror, and

wherein said signal processor determines the at least one control signal from the second and third electrical signals.

38. The automatic rearview mirror system defined by Claim 37,

wherein the automotive vehicle further comprises vehicle lighting,

wherein said signal processor determines a vehicle lighting control signal using the third electrical signal,

wherein said system further comprises at least one vehicle lighting switch, connected to said signal processor and to the vehicle lighting, receiving the vehicle lighting control signal from said signal processor and turning on or turning off the vehicle lighting in response thereto.

39. The automatic rearview mirror system defined by Claim 1, wherein the light levels in the area rearward of said at least one variable reflectance rearview mirror comprise light levels from a rear window area,

at least a portion of a right side window area and at least a portion of a left side window area, and

wherein said photosensor array has a two-dimensional field of view comprising said rear window area, said at least a portion of a right side window area and said at least a portion of a left side window area.

40. The automatic rearview mirror system defined by Claim 39, wherein said photosensor array comprises 40 rows of said photosensor elements, each row comprising 160 of said photosensor elements.

41. The automatic rearview mirror system defined by Claim 1, wherein the system comprises a plurality of said drive circuits and the variable reflectance rearview mirrors,

wherein said signal processor determines and outputs a plurality of the control signals to said plurality of said drive circuits, each of the control signals corresponding to a desired reflectance for each of said plurality of variable reflectance rearview mirrors, and

wherein said plurality of said drive circuits, in response to the control signals, generate and apply a plurality of said drive signals to said plurality of variable reflectance rearview mirrors causing each of said variable reflectance rearview mirrors to assume a desired reflectance level associated therewith.

42. The automatic rearview mirror system defined by Claim 41, wherein said photosensor array comprises a plurality of photosensor element sets, each of said sets corresponding to each of said plurality of variable reflectance rearview mirrors,

660070 THE 2260

wherein said signal processor determines and outputs a plurality of said second electrical signals indicative of the at least the one peak light level,

wherein said signal processor uses the first electrical signal indicative of the background light level and the plurality of said second electrical signals to determine and output the control signal for each of said plurality of said drive circuits and said variable reflectance rearview mirrors associated therewith.

43. The automatic rearview mirror system defined by Claim 41, wherein said photosensor array comprises a first photosensor element set and a second photosensor element set, and a lens for focusing light from a rear window area and from at least a portion of a side window onto said photosensor array,

wherein said signal processor determines a first peak light signal indicative of a peak light level of light incident on the first photosensor element set,

wherein said signal processor determines a second peak light signal indicative of a peak light level of light incident on the second photosensor element set,

wherein said signal processor determines and outputs a first control signal indicative of a desired reflectance level for one of said plurality of variable reflectance rearview mirrors using the first peak light signal and the first electrical signal indicative of the background light level,

wherein said signal processor determines and outputs a second control signal indicative of a desired reflectance level for another of said plurality of variable reflectance rearview mirrors using the second peak light signal and the first electrical signal indicative of the background light level,

wherein said first control signal is received by one of said plurality of drive circuits which generates

669976-1-22260

wherein said signal processor determines and outputs first, second and third control signals indicative of a desired reflectance for said rearview mirror, said left side view mirror and said right side view mirror, respectively, using each of the first, second, and third peak light signals and the first

electrical signal indicative of the background light level,

wherein each of the first, second and third control signals are output to each of said drive circuits associated therewith to generate and apply a first, second and third drive signal to said rearview mirror, said left side view mirror, and said right side view mirror, respectively, causing said mirrors to assume the desired reflectance level associated therewith.

45. The automatic rearview mirror system defined by Claim 1, wherein said array of sensing elements comprises an analog photosensor array of photosensor elements, each of said photosensor elements generating analog photosensor element signals in response to light incident thereon,

wherein said system further comprises an analog-to-digital converter connected to said analog photosensor array and said signal processor to convert the analog photosensor element signals to digital photosensor element signals,

wherein said signal processor determines the first electrical signal indicative of the background light level using the digital photosensor element signals,

wherein said signal processor determines the second electrical signal indicative of at least one peak light level using the digital photosensor element signals,

wherein the control signal determined by said signal processor is a digital control signal,

wherein said system further comprises a digital-to-analog converter connected to said signal processor and to said at least one drive circuit to convert the digital control signal to an analog control signal, and

wherein said at least one drive circuit receives the analog control signal and in response thereto

668070" 11/2/2000

generates and applies a drive signal to said at least one variable reflectance rearview mirror to vary its reflectance level.

46. A control system for controlling a plurality of variable reflectance mirrors, each of which change their reflectance level in response to a drive signal from an associated drive circuit, for an automotive vehicle, comprising:

- a plurality of variable reflectance mirrors;
- a photosensor array mountable to face substantially towards a rear area, wherein said photosensor array comprises a plurality of photosensor element sets, each set comprising a plurality of photosensor elements, each of said photosensor elements generating a photosensor element signal indicative of a light level of light incident thereon, and each of the sets corresponding to one of said plurality of variable reflectance mirrors,

- a control circuit, connected to said photosensor array, for determining and applying a plurality of control signals, each of the control signals indicative of a desired reflectance level for each of said plurality of variable reflectance mirrors in response to receiving the photosensor element signals from each of the plurality of photosensor element sets,

- a plurality of drive circuits connected to said control circuit and to different ones of said plurality of variable reflectance mirrors associated therewith,

wherein each of the control signals is output to said drive circuit associated therewith, to generate and apply a drive signal to each of said plurality of variable reflectance mirrors causing each of said mirrors to assume a reflectance level.

47. The control system defined by Claim 46, wherein said control circuit determines a background light

using the first peak light signal and the background light signal,

wherein said control circuit determines a second control signal indicative of another desired reflectance for another of said plurality of variable reflectance mirrors using the another peak light signal and the background light signal,

wherein the first control signal controls a first drive circuit to generate a first drive signal in response to which said one of said plurality of variable reflectance mirrors is driven to the desired reflectance associated therewith, and

wherein said second control signal controls a second drive circuit to generate a second drive signal in response to which said another of said plurality of variable reflectance mirrors is driven to the desired reflectance associated therewith.

49. The control system defined by Claim 48, wherein said plurality of variable reflectance mirrors comprise a rearview mirror, a left side view mirror and a right side view mirror,

wherein said light from at least one side window area comprises light from a left side window area and light from a right side window area,

wherein said photosensor array further comprises a third photosensor element set, each of said photosensor elements generating a photosensor element signal indicative of a light level incident thereon,

wherein said control circuit determines a first peak light signal indicative of a peak light level incident on the first photosensor element set in response to receiving photosensor element signals from the first photosensor element set,

wherein said control circuit determines a second peak light signal indicative of a second peak light level incident on the second photosensor element set in

response to receiving photosensor element signals from the second photosensor element set,

wherein said control circuit determines a third peak light signal indicative of a third peak light level incident on the third photosensor element set in response to receiving photosensor element signals from the third photosensor element set,

wherein said control circuit determines a first control signal indicative of a desired reflectance level of said rearview mirror using the first peak light signal and the background light signal,

wherein said control circuit determines a second control signal indicative of a desired reflectance level of said left side view mirror using the second peak level signal and the background light signal,

wherein said control circuit determines a third control signal indicative of a desired reflectance level of said right side view mirror using the third peak light signal and the background light signal,

wherein said first control signal controls a first drive circuit to generate a first drive signal in response to which said rearview mirror is driven to the desired reflectance level associated therewith,

wherein said second control signal controls a second drive circuit to generate a second drive signal in response to which said left side view mirror is driven to the desired reflectance level associated therewith, and

wherein said third control signal controls a third drive circuit to generate a third drive signal in response to which said right side view mirror is driven to the desired reflectance level associated therewith.

50. A control system for controlling at least one variable reflectance mirror for an automotive vehicle, comprising:

668070 THE 2250

means for controlling a reflectance level of the at least one variable reflectance mirror using the background and peak light signals.

desired reflectance control means for controlling the reflectance level of the at least one variable reflectance mirror using the determined desired reflectance level.

wherein said means for determining a background light signal determines the background light signal by calculating an average of the photosensor element signals corresponding to the light levels incident on said photosensor elements in the lowest X rows of said photosensor array means, wherein X is a positive

integer less than the number of rows in said photosensor array means.

53. The control system defined by Claim 51, wherein said photosensor array means comprises a plurality of photosensor elements, each photosensor element generating a photosensor element signal indicative of a light level of light incident thereon, wherein said means for determining a background light signal determines a background light signal by calculating an average of X percent of the photosensor element signals, wherein X is a positive number.

54. The control system defined by Claim 53, wherein X is approximately 100.

55. The control system defined by Claim 51, wherein said photosensor array means comprises a plurality of photosensor elements, each photosensor element generating a photosensor element signal indicative of a light level of light incident thereon, wherein said means for determining a background light signal determines a background light signal by calculating an average of X percent of the photosensor element signals indicative of the lowest light levels incident on said photosensor elements, wherein X is a positive number.

56. The control system defined by Claim 55, wherein X is between approximately 5 and 100.

57. The control system defined by Claim 55, wherein X is approximately 75.

58. The control system defined by Claim 51, wherein said photosensor array means comprises a plurality of photosensor elements for sensing light levels in an

area rearward of said at least one variable reflectance mirror, each photosensor element generating photosensor element signals indicative of a light level incident thereon,

wherein said means for determining a peak light signal determines a peak light signal by determining the average value of Y percent of the photosensor element signals indicative of the highest light levels of light incident on a predetermined set of said photosensor elements, wherein Y is a positive number.

59. The control system defined by Claim 58, wherein Y is in the range of approximately 1 to 25.

60. The control system defined by Claim 58, wherein Y is approximately 10.

61. The control system defined by Claim 51, wherein said desired reflectance level determining means determines a control signal indicative of the desired reflectance level according to the formula:

$$V_c(z) = V_1 + (R_1 - S \times C_T \times B/P(z)) \times (V_2 - V_1)/(R_1 - R_2),$$

wherein V_c is the voltage of the at least one control signal determined by said signal processor, V_1 is the approximate voltage which, when applied to said at least one variable reflectance mirror, causes said at least one variable reflectance mirror to begin perceptibly decreasing its reflectance from its maximum reflectance level R_1 , S is a sensitivity factor, C_T is the maximum contrast ratio of the peak light level to the background light level, B is the background light level, $P(z)$ is the at least one peak light level, and V_2 is the approximate voltage which, when applied to said at least one variable reflectance mirror, causes said at least one variable reflectance mirror to decrease

668070 "HELEBO

its reflectance to approximately its minimum reflectance level R_2 .

62. The control system defined by Claim 51, wherein said desired reflectance level determining means tests the photosensor array signals to determine whether each photosensor array signal is indicative of a peak light level or a background light level.

63. The control system defined by Claim 62, further comprising an imaging system comprising a lens to focus an image of the area rearward of said at least one variable reflectance mirror onto said photosensor array means, and means for applying a lens correction factor to each photosensor array signal.

64. The control system defined by Claim 63, wherein the lens correction factor is in the range of approximately 1 to 15.

65. The control system defined by Claim 62, wherein said desired reflectance level determining means determines a value indicative of the sensed light level corresponding to each photosensor array signal and compares each determined value with a predetermined peak threshold value to determine whether each photosensor array signal is indicative of a peak light level or a background light level.

66. The control system defined by Claim 65,
wherein said desired reflectance level determining means determines that a photosensor array signal is indicative of a background light level when the determined value indicative of the sensed light level corresponding to one of the photosensor array signals is not greater than the peak threshold value, and

wherein said desired reflectance level determining means determines that a photosensor array signal is indicative of a peak light level when the determined value indicative of the sensed light level corresponding to the one of the photosensor array signals is greater than the peak threshold value.

67. The control system defined by Claim 66, wherein the peak threshold value is in the range of approximately 200 to 255.

68. The control system defined by Claim 66, wherein said desired reflectance level determining means determines the background light signal by summing the determined values determined to be not greater than the peak threshold value and dividing the resulting sum by the number of determined values determined to be not greater than the peak threshold value.

69. The control system defined by Claim 66, wherein said desired reflectance level determining means counts the number of determined values greater than the peak threshold value in a predetermined set of determined values corresponding to a predetermined set of photosensor elements of said photosensor array means and determines the peak light signal in the area rearward of the at least one variable reflectance mirror as a function of the number of determined values greater than the peak threshold value in the predetermined set of determined values.

70. The control system defined by Claim 65, wherein said photosensor array means is located in the at least one variable reflectance mirror so as to receive light through an active layer of said at least one variable reflectance mirror from the area rearward of said at least one variable reflectance mirror, and

wherein said desired reflectance level determining means applies a color correction factor to each value indicative of the sensed light level for each photosensor array signal to compensate for the reduction in transmitted light levels when the reflectance level of the at least one variable reflectance mirror is reduced.

71. The control system defined by Claim 51,
wherein said desired reflectance level determining means uses the background light signal to determine a change-limited background light signal, and
wherein said desired reflectance level determining means uses the change-limited background signal to determine the desired reflectance level.

72. The control system defined by Claim 51, further comprising means for determining a plurality of peak light signals, wherein said means for determining a desired reflectance determines the desired reflectance for a plurality of variable reflectance mirrors using the background light signal and the plurality of the peak light signals, and
wherein said desired reflectance control means controls each of said plurality of variable reflectance mirrors using the desired reflectance for each of said plurality of variable reflectance mirrors.

73. The control system defined by Claim 72, wherein said photosensor array means comprises a first set and a second set of photosensor elements, and a lens for focusing light from a rear window area and from at least a portion of a side window onto said photosensor array means, each photosensor element generating a photosensor element signal indicative of a light level incident thereon,

wherein said means for determining a plurality of peak light signals determines a peak light signal indicative of a peak light level of light incident on the first photosensor element set from photosensor element signals of the first set and determines another peak light signal indicative of another peak light level of light incident on the second photosensor element set from photosensor element signals of the second set,

wherein said means for determining a desired reflectance determines the desired reflectance for one of said variable reflectance mirrors using the peak light signal corresponding to the first photosensor element set and the background light signal, and

wherein said means for determining a desired reflectance determines the desired reflectance for another of said variable reflectance mirrors using the peak light signal corresponding to the second photosensor element set and the background light level.

74. The control system defined by Claim 73, wherein the plurality of variable reflectance mirrors comprises a rearview mirror, a left side view mirror and a right side view mirror, wherein said light from a side window area comprises light from at least a portion of a left side window area and light from at least a portion of a right side window area,

wherein said photosensor array means comprises a third set of photosensor elements, each of said photosensor elements generating a photosensor element signal indicative of a light level incident thereon,

wherein said means for determining a plurality of peak light signals determines a first peak light signal indicative of a peak light level of light incident on the first photosensor element set, a second peak light signal indicative of a peak light level of light incident on the second photosensor element set and a

third peak light signal indicative of a peak light level of light incident on said third photosensor element set from photosensor element signals associated, respectively, with the first, second and third photosensor element sets,

wherein said means for determining a desired reflectance determines a desired reflectance of said rearview mirror using the first peak light signal and the background light signal,

wherein said means for determining a desired reflectance determines a desired reflectance of said left side mirror using the second peak light signal and the background light signal,

wherein said means for determining a desired reflectance determines a desired reflectance of said right side mirror using the third peak light signal and the background light signal, and

wherein said desired reflectance control means controls the rearview mirror, the left side mirror, and the right side mirror, respectively, using the desired reflectances of the rearview mirror, the left side mirror, and the right side mirror.

75. The control system defined by Claim 51, wherein said photosensor array signals are analog signals,

wherein said system further comprises analog-to-digital conversion means for converting the analog photosensor array signals to digital photosensor array signals,

wherein said means for determining a background light signal determines a background light signal from the digital photosensor array signals, and

wherein said means for determining a peak light signal determines a peak light signal the digital photosensor array signals,

wherein said desired reflectance level determining means determines the desired reflectance level and produces a digital control signal indicative thereof,

wherein said system further comprises digital-to-analog conversion means to convert the digital control signal to an analog control signal, and

wherein said desired reflectance control means controls the reflectance level of the at least one variable reflectance mirror using the analog control signal.

76. A method of controlling the reflectance of at least one variable reflectance mirror comprising the steps of:

sensing light levels in an area rearward of the at least one variable reflectance mirror with an array of sensing elements;

determining a background light level from the sensed light levels;

determining a peak light level from the sensed light levels; and

controlling a reflectance level of the at least one variable reflectance mirror using the determined background and peak light levels.

77. The method defined by Claim 76,

wherein the array has a plurality of rows of sensing elements, and

wherein said step of determining a background light level comprises the step of determining the background light level by calculating an average of the sensed light levels in the lowest X rows of the array, wherein X is a positive integer less than the number of rows in the array.

78. The method defined by Claim 76, wherein said step of determining a background light level comprises the

660070 THE 2300

step of determining a background light level by calculating an average of X percent of the sensed light levels, wherein X is a positive number.

79. The method defined by Claim 76, wherein said step of determining a background light level comprises the step of determining a background light level by calculating an average of X percent of the lowest sensed light levels, wherein X is a positive number.

80. The method defined by Claim 76, wherein said step of determining a peak light level comprises the step of determining a peak light level by calculating an average of Y percent of the sensed light levels indicative of the highest sensed light levels, wherein Y is a positive number.

81. The method defined by Claim 76,
wherein the at least one variable reflectance mirror changes its reflectance in response to the application of a voltage thereto,
wherein said controlling step determines a desired reflectance level for the at least one variable reflectance mirror according to the formula:

$$V_C(z) = V_1 + (R_1 - S \times C_T \times B/P(z)) \times (V_2 - V_1)/(R_1 - R_2),$$

wherein $V_C(z)$ is a voltage representing the desired reflectance level, V_1 is the approximate voltage which, when applied to the at least one variable reflectance mirror, causes the at least one variable reflectance mirror to begin perceptibly decreasing its reflectance from its maximum reflectance level R_1 , S is a sensitivity factor, C_T is the maximum contrast ratio of the peak light level to the background light level B is the determined background light level, $P(z)$ is the determined peak light level, and V_2 is the approximate

voltage which, when applied to the at least one variable reflectance mirror, causes the at least one variable reflectance mirror to decrease its reflectance to approximately its minimum reflectance level R_2 ,

wherein said controlling step comprises the step of applying the voltage $V_c(z)$ to the at least one variable reflectance mirror to cause the at least one variable reflectance mirror to assume the determined desired reflectance level.

82. The method defined by Claim 76,

wherein said sensing step comprises the step of sensing the light level of light incident on each sensing element of the array, and

wherein said method further comprises the step of testing the light level sensed by each sensing element of the array to determine whether each light level is indicative of a peak light level or a background light level.

83. The method defined by Claim 82, wherein said testing step comprises the step of comparing each sensed light level of each sensing element of the array with a predetermined peak threshold value to determine whether each light level is indicative of a peak light level or a background light level.

84. The method defined by Claim 83,

wherein said testing step comprises the step of determining that a sensed light level of a sensing element is indicative of a background light level when the sensed light level is not greater than the peak threshold value, and

wherein said testing step further comprises the step of determining that a sensed light level of a sensing element is indicative of a peak light level

when the sensed light level is greater than the peak threshold value.

85. The method defined by Claim 84, wherein said background light level determining step comprises the step of determining a background light level by summing the sensed light levels sensed by each sensing element that are determined to be not greater than the peak threshold value and dividing the resulting sum by the number of sensed light levels determined to be not greater than the peak threshold value.

86. The method defined by Claim 85, wherein said peak light level determining step comprises the steps of counting the number of sensed light levels greater than the peak threshold value in a predetermined set of sensed light levels corresponding to a predetermined set of sensing elements of the array, and determining a peak light level in the area rearward of the at least one variable reflectance mirror as a function of the number of sensed light levels greater than the peak threshold value in the predetermined set.

87. The method defined by Claim 76, further comprising the step of:

determining a plurality of peak light levels for a plurality of areas rearward of the at least one variable reflectance mirror,

wherein said controlling step comprises the step of determining a desired reflectance for each of a plurality of variable reflectance mirrors using the determined background light level and the plurality of peak light levels, and

wherein said controlling step further comprises the step of controlling the reflectance of each of the plurality of variable reflectance mirrors using the

determined desired reflectance for each of the plurality of variable reflectance mirrors.

88. A control system for monitoring a vehicle interior and for controlling at least one variable reflectance mirror for an automotive vehicle, comprising:

photosensor array means for sensing light levels in an area rearward of said photosensor array means and generating at least a first set of photosensor array signals;

first determining means coupled to said photosensor array means for receiving said at least a first set of photosensor array signals and determining from at least a portion of said at least a first set of photosensor array signals a first signal for controlling said at least one variable reflectance mirror;

second determining means coupled to said photosensor array means for receiving said at least a first set of photosensor array signals and determining at least a first set of values indicative of said at least a portion of said at least a first set of photosensor array signals; and

memory means coupled to said second determining means for receiving and storing said at least a portion of said at least a first set of photosensor array signals.

89. A vehicle intrusion detection system for detecting movement within a vehicle interior for an automotive vehicle, comprising:

photosensor array means for sensing light levels in an area including at least a portion of a vehicle interior and generating at least a first set and a second set of photosensor array signals;

determining means coupled to said photosensor array means for receiving said at least a first set and a second set of photosensor array signals and determining at least a first set and a second set of

2025 RELEASE UNDER E.O. 14176

values indicative of said at least a first set and a second set of photosensor array signals; and

comparing means coupled to said determining means for receiving said at least a first set and a second set of values indicative of said at least a first set and a second set of photosensor array signals and comparing said at least a first set and a second set of values to generate at least one output control signal indicative of the correlation between said at least a first set and a second set of values.

90. A compartment image data storage system for an automotive vehicle, comprising:

photosensor array means for sensing light levels in at least a portion of a vehicle compartment and generating at least a first set of photosensor array signals;

determining means coupled to said photosensor array means for receiving said at least a first set of photosensor array signals and determining at least a first set of values indicative of said at least a first set of photosensor array signals; and

memory means coupled to said determining means for receiving and storing said at least a first set of values indicative of said at least a first set of photosensor array signals.

91. An automatic rearview mirror system for an automotive vehicle comprising:

a variable reflectance rearview mirror;

a photosensor array means for sensing light levels in an area rearward of said variable reflectance rearview mirror and for generating photosensor array signals;

a signal processing means for receiving said photosensor array signals and for determining from said photosensor array signals a signal for controlling said variable reflectance rearview mirror; and

ABSTRACT OF THE DISCLOSURE

5 A system apparatus, means and method for controlling a plurality of variable reflectance mirrors (or mirror segments), including a rearview mirror and side view mirrors, which change their reflectance level in response to a plurality of drive voltages applied thereto, for controlling the vehicle lighting system and for monitoring a vehicle interior for an automotive vehicle. The system includes a light sensing device and a control circuit formed as a single VLSI CMOS circuit. The light sensing device comprises a photosensor array having a field of view encompassing a vehicle interior. The logic and control circuit
15 determines a background light signal from photosensor element signals generated by the photosensor elements in the photosensor array indicative of light levels incident on the photosensor elements. The circuit also determines a peak light signal in three different zones or sub-arrays of the photosensor array. The zones or sub-arrays may correspond to three mirrors or mirror segments. The peak light signals in each of the zones and a common background light signal are used to determine independent and separate control signals,
25 which are then output to separate mirror drive circuits for independently controlling the reflectance level of the rearview mirror and the left and right side view mirrors, or alternatively the segments of a mirror. The logic and control circuit uses the background light signal to control the vehicle lighting system. The logic and control circuit also determines a vehicle intrusion condition if there is movement within the vehicle in a vehicle intrusion detection mode of the vehicle interior monitoring system. The logic and
35 control circuit also stores image data in memory in the compartment image data storage mode of the vehicle interior monitoring system.

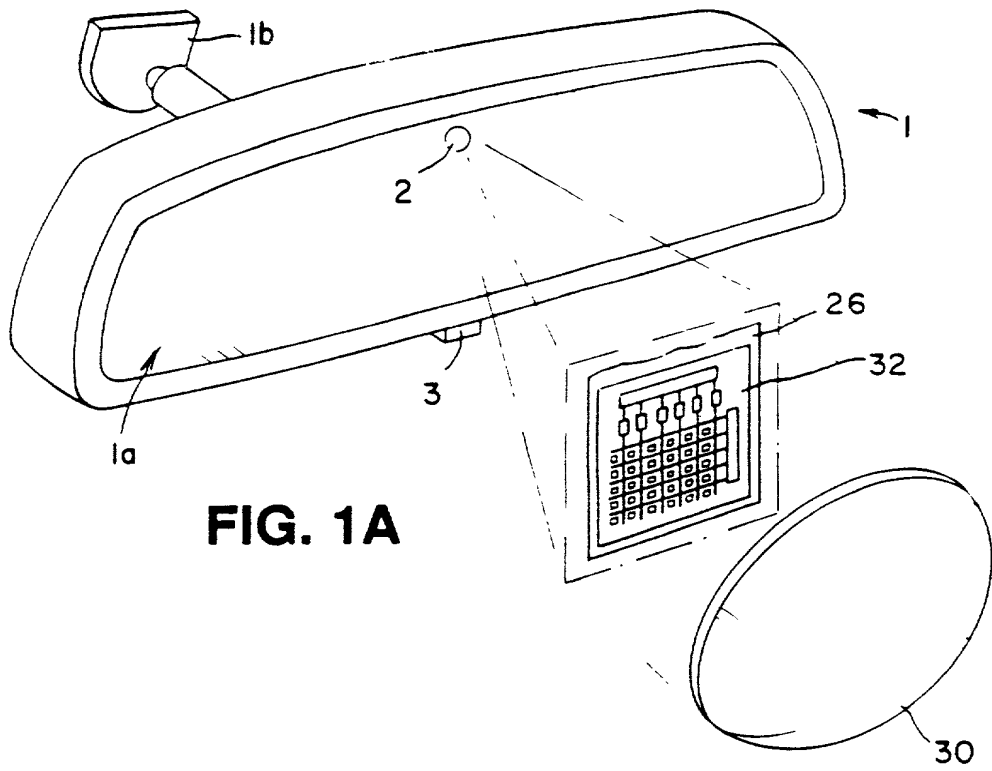


FIG. 1A

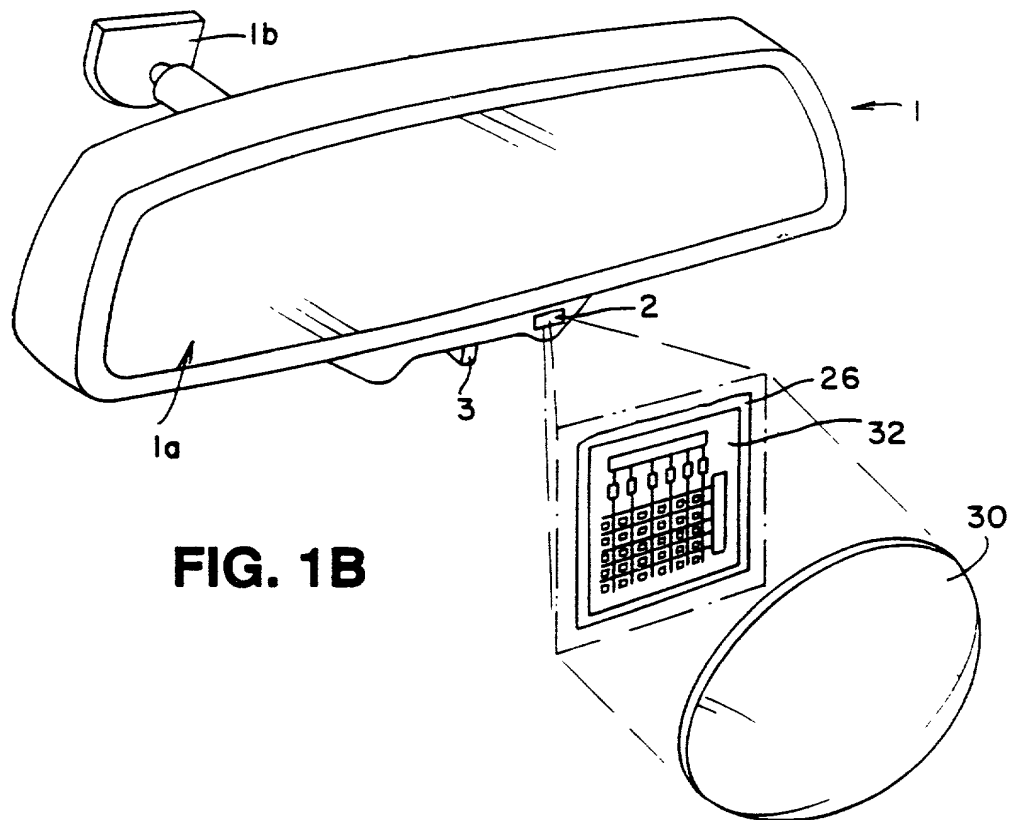


FIG. 1B

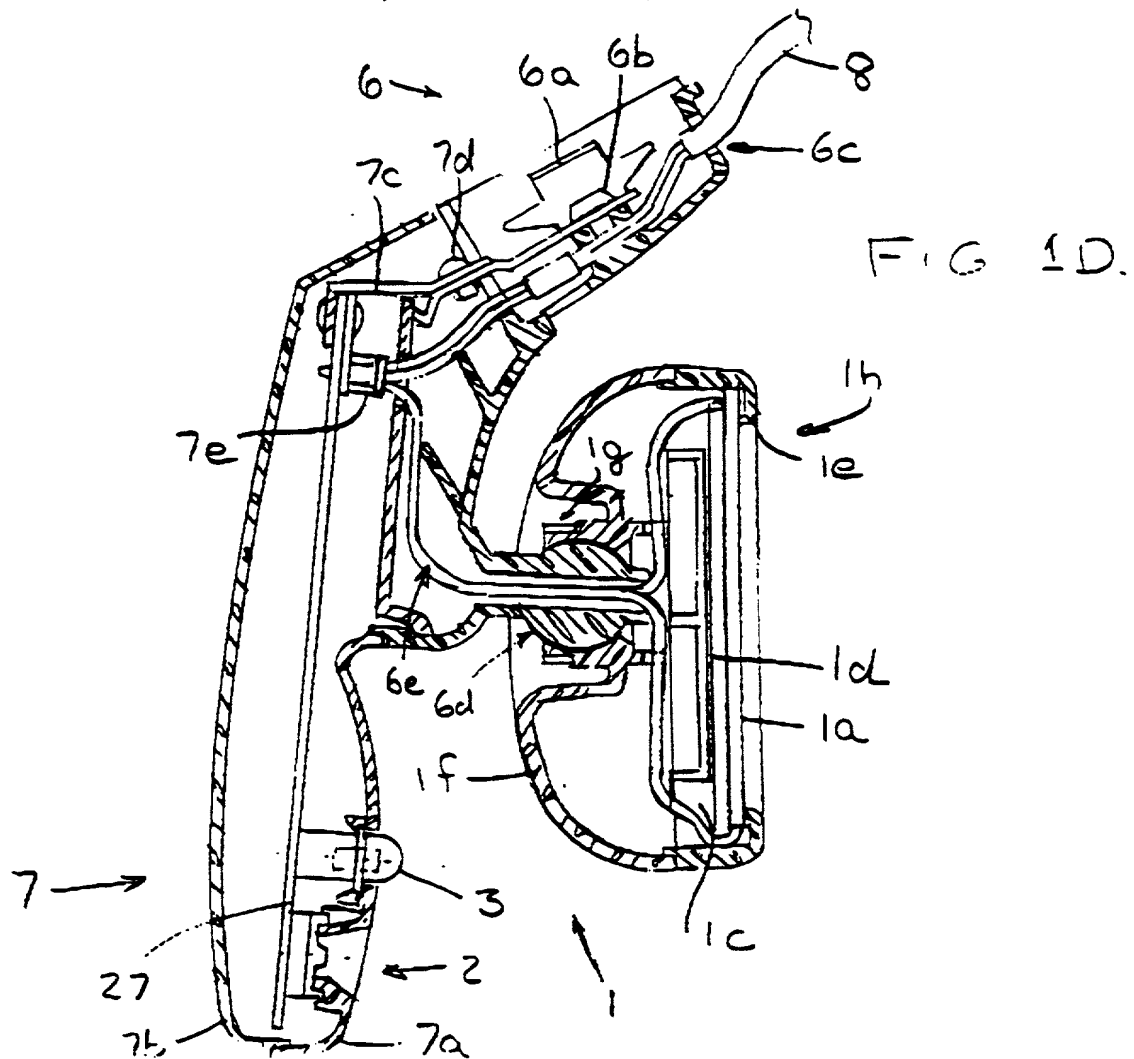
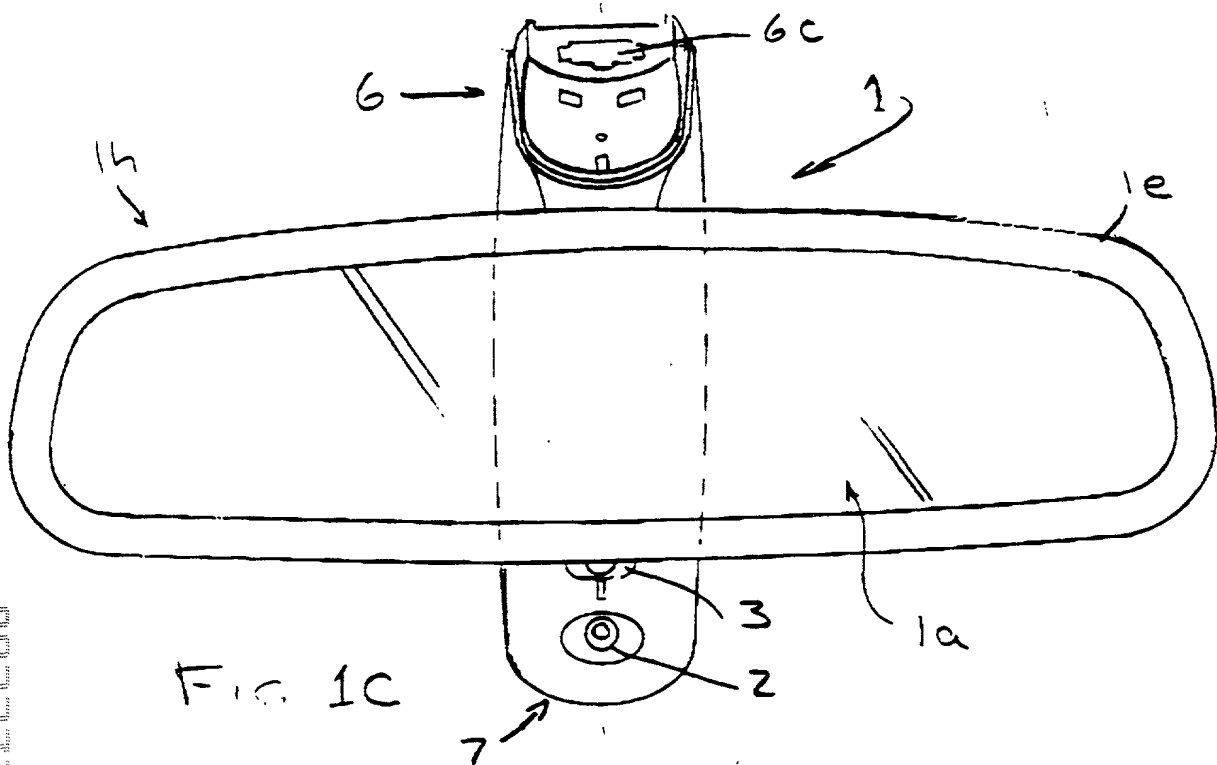


FIG. 2

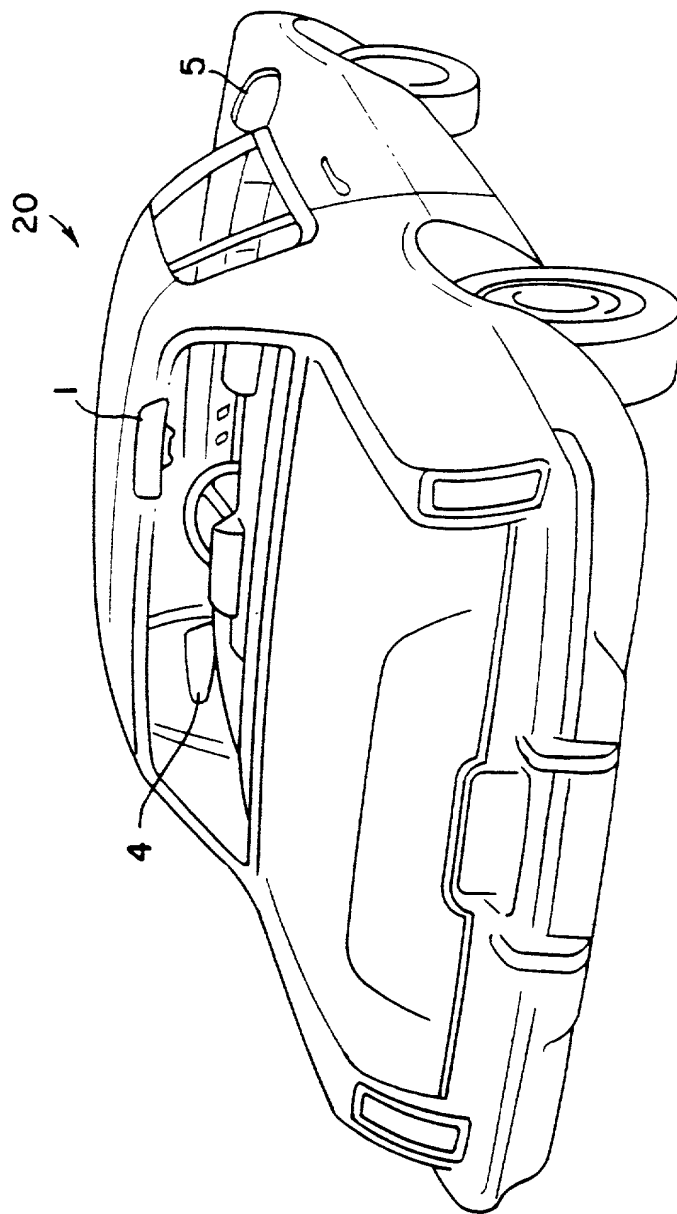


FIG. 2A

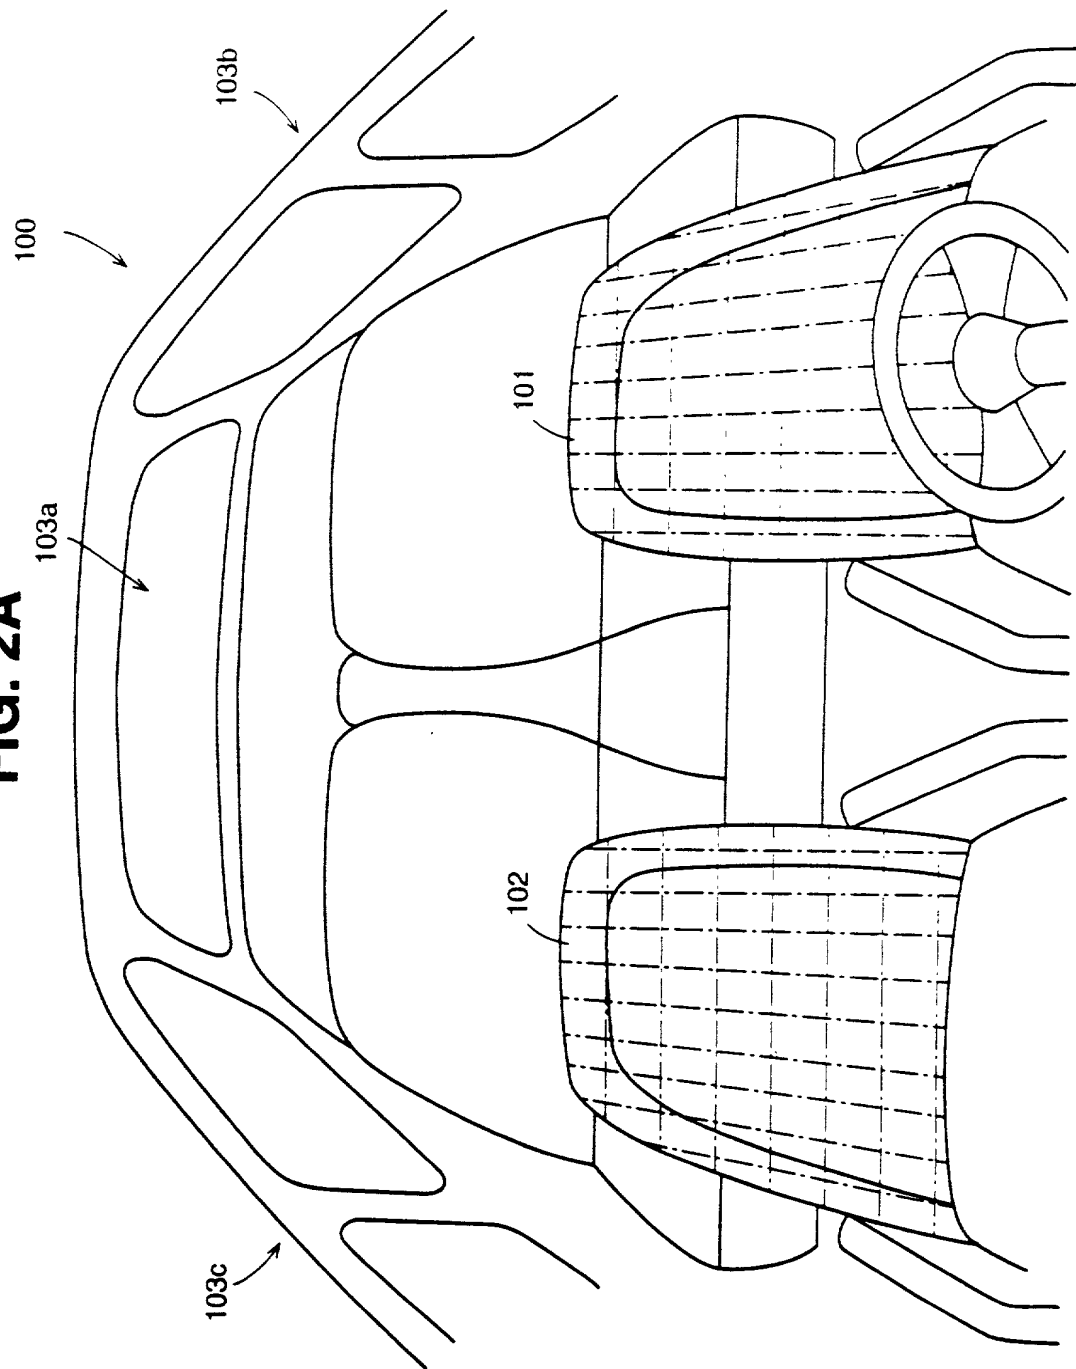


FIG. 3A

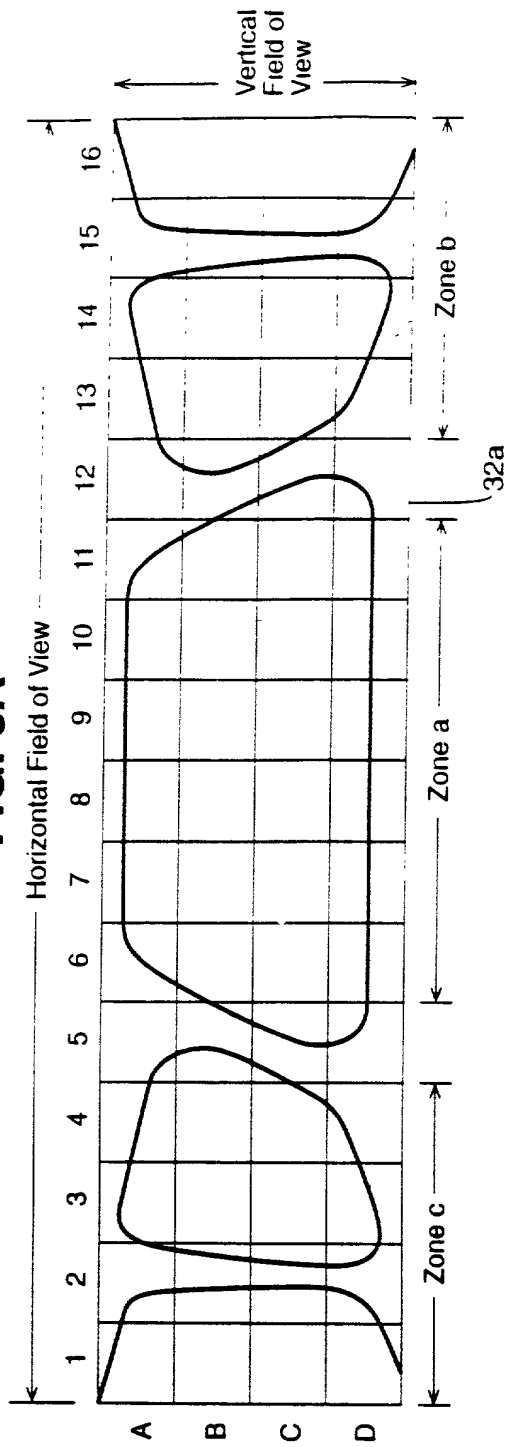


FIG. 3B

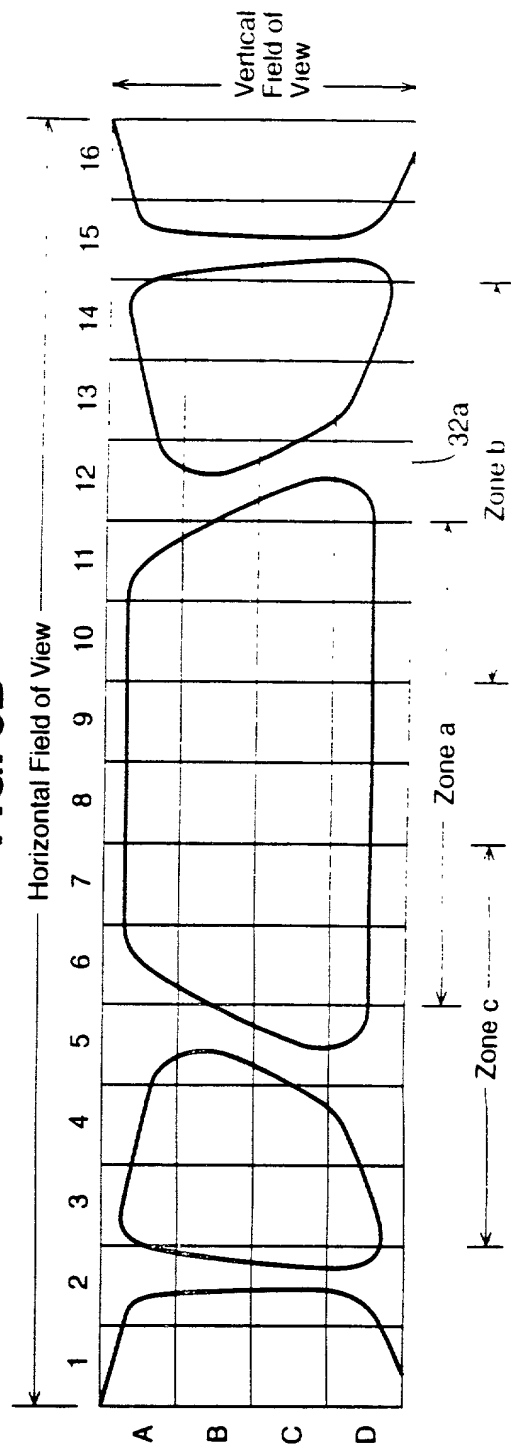


FIG. 4A

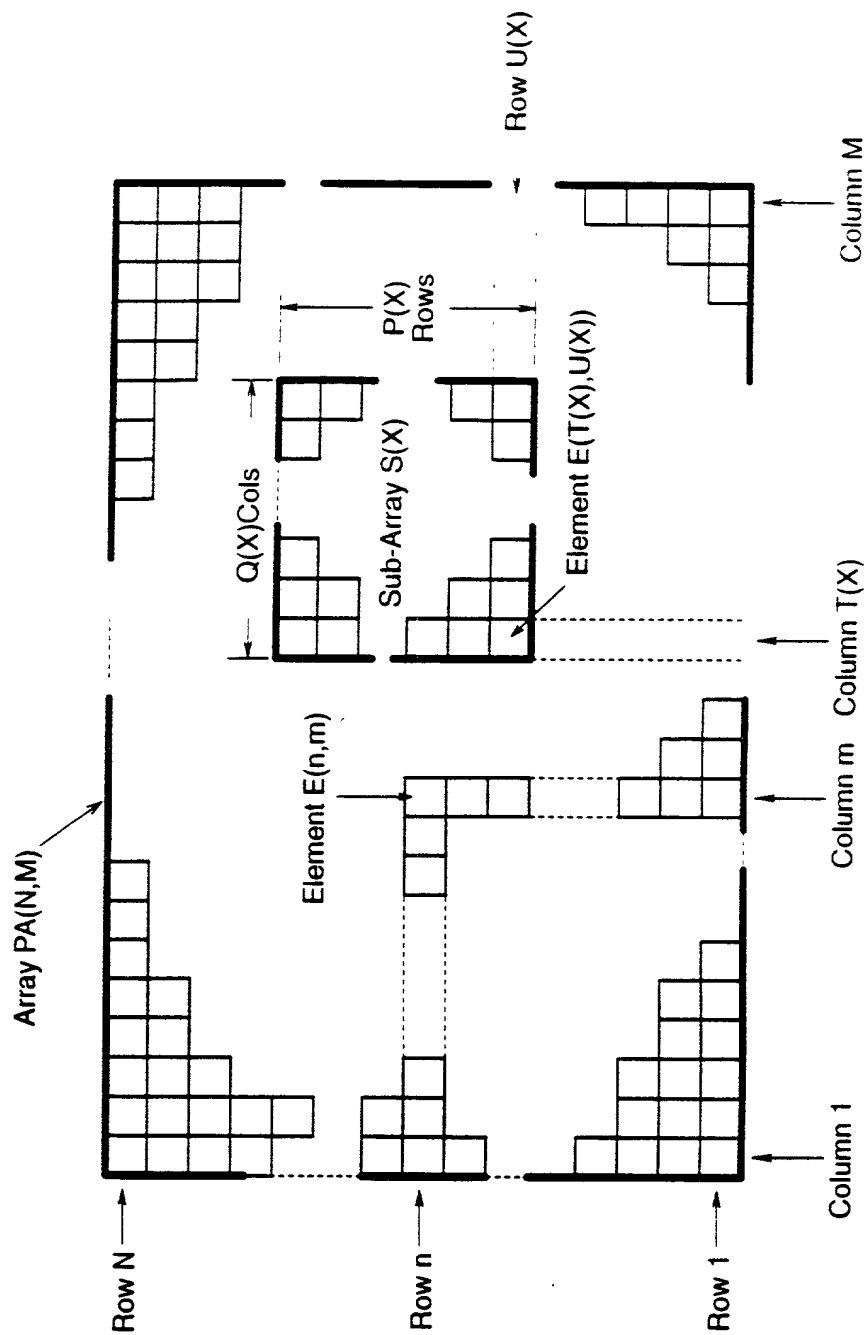


FIG. 4B

Photosensor Array PA(N,M)

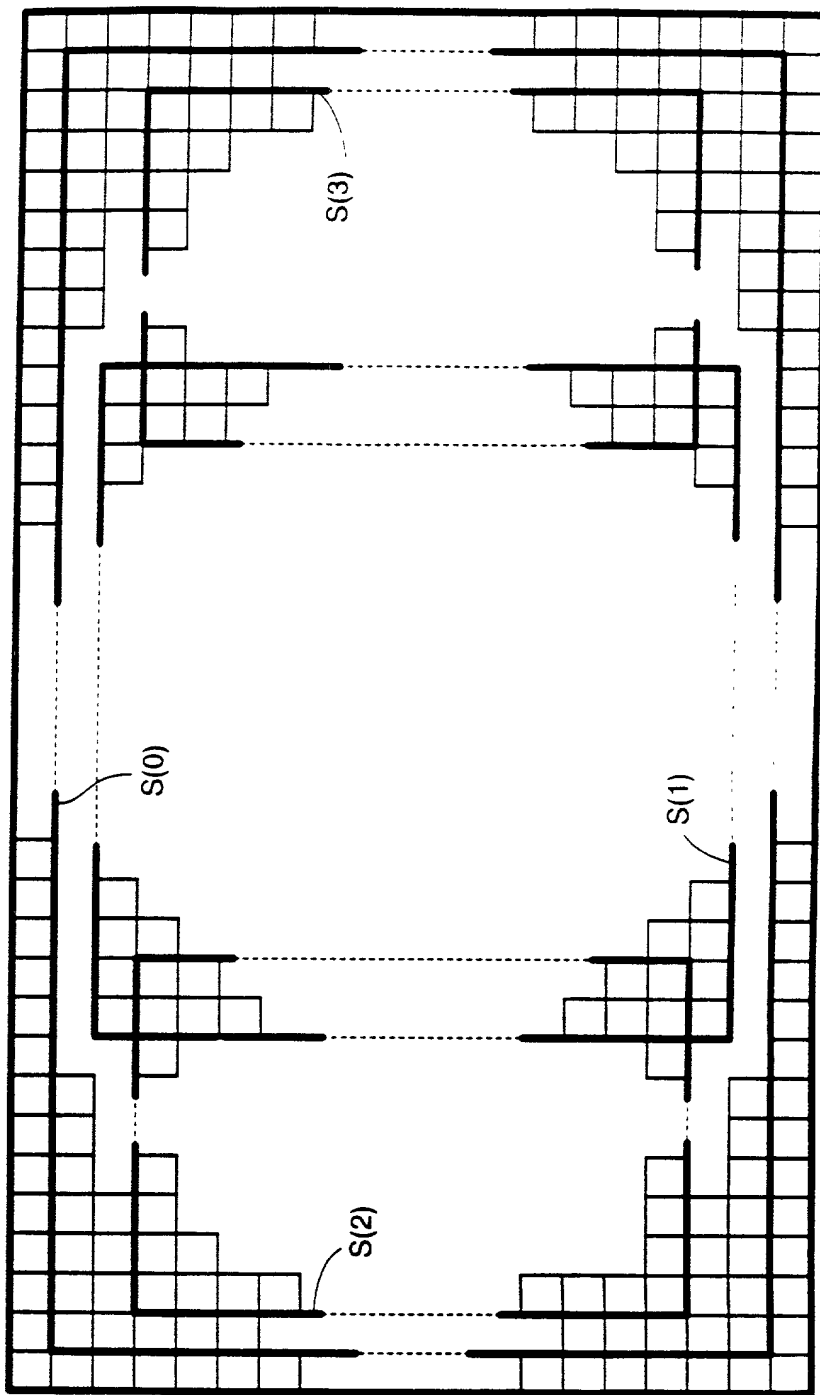


FIG. 5

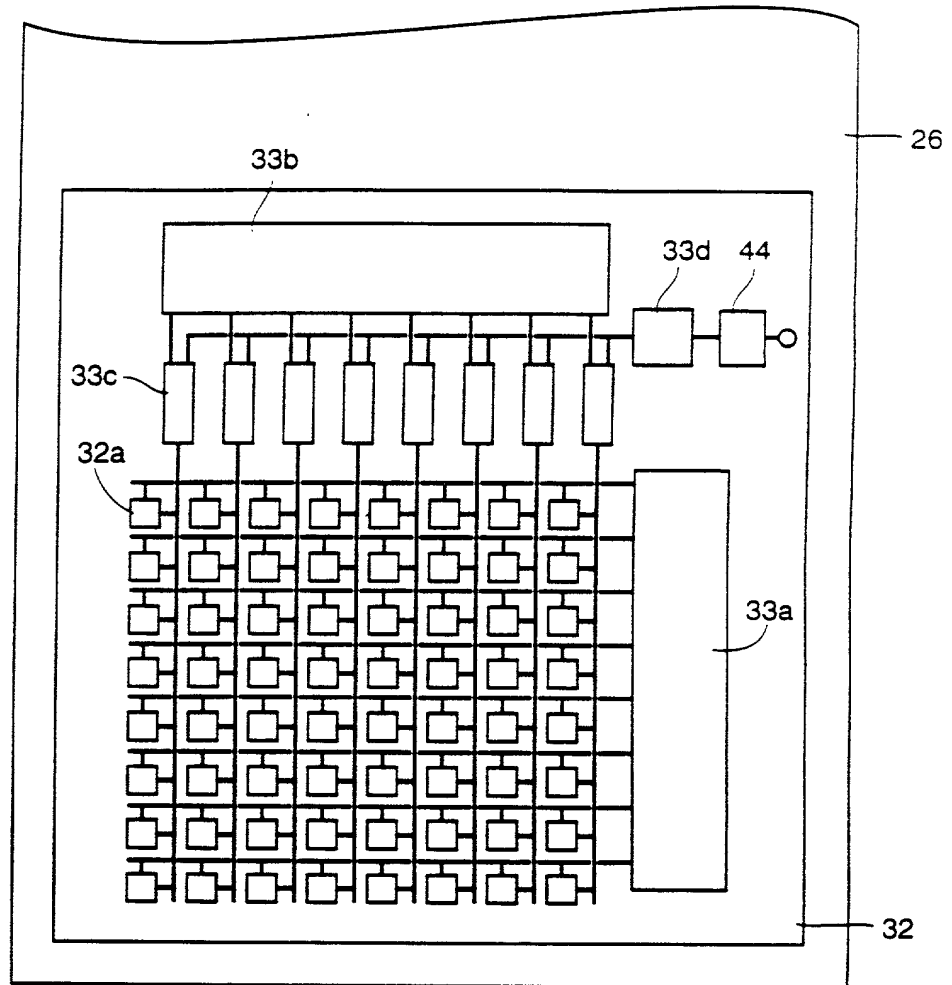


FIG. 6

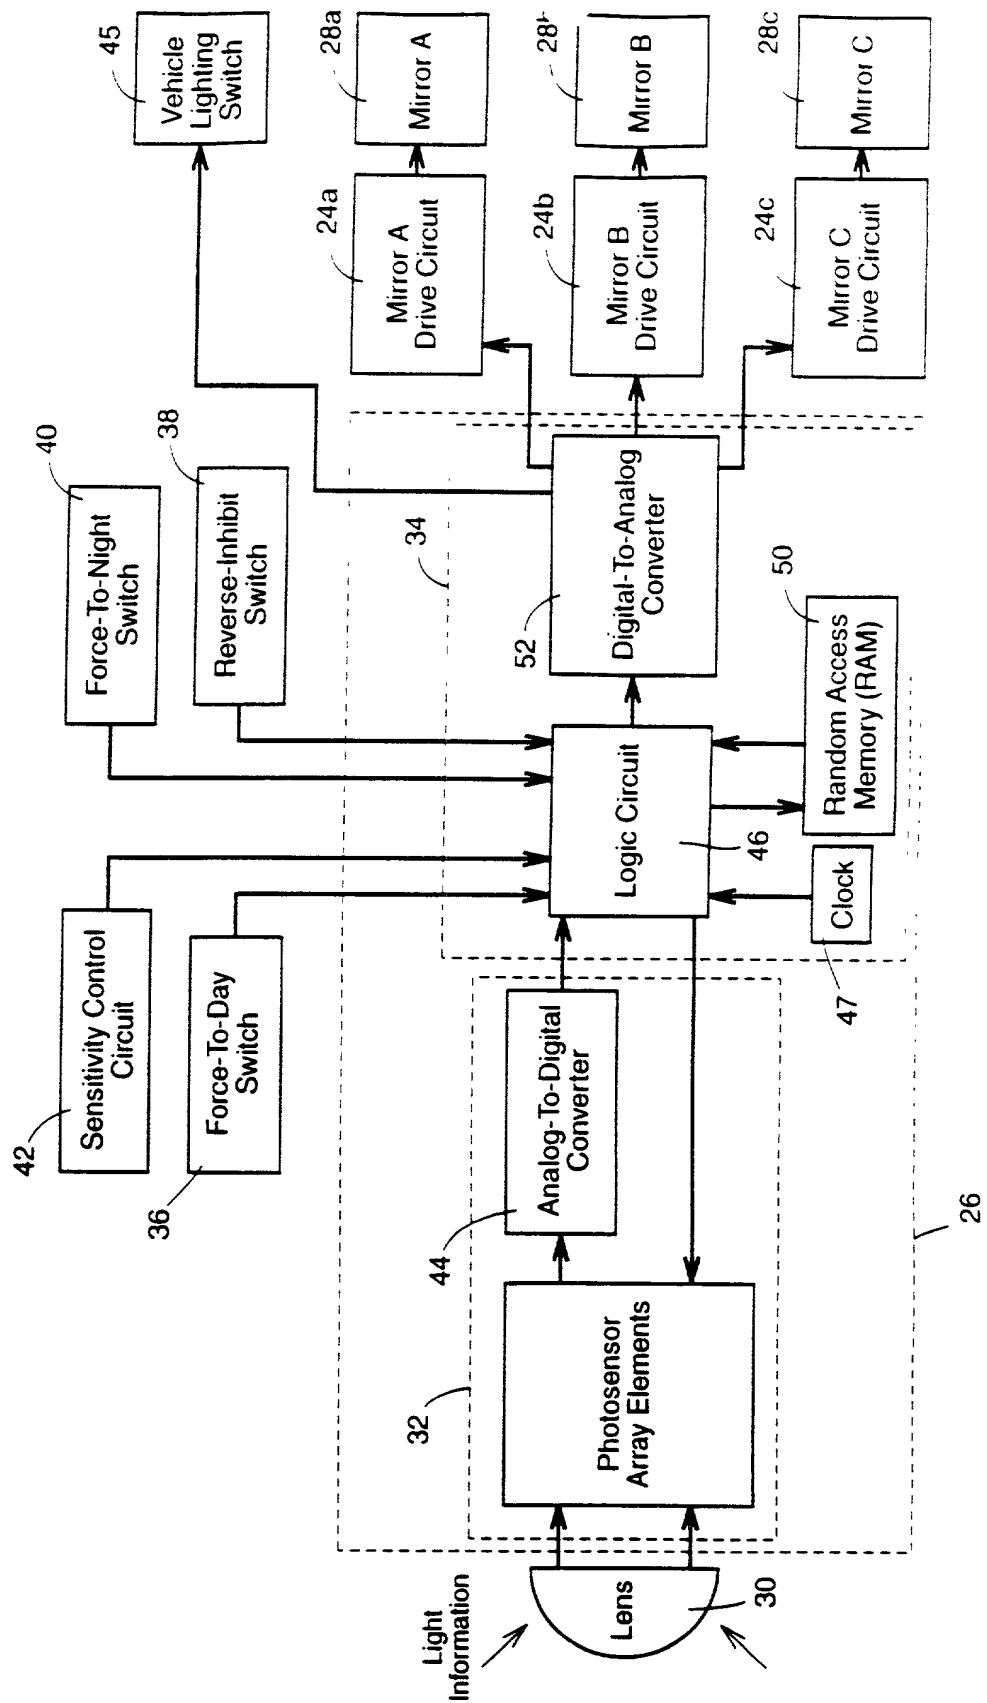


FIG. 6B

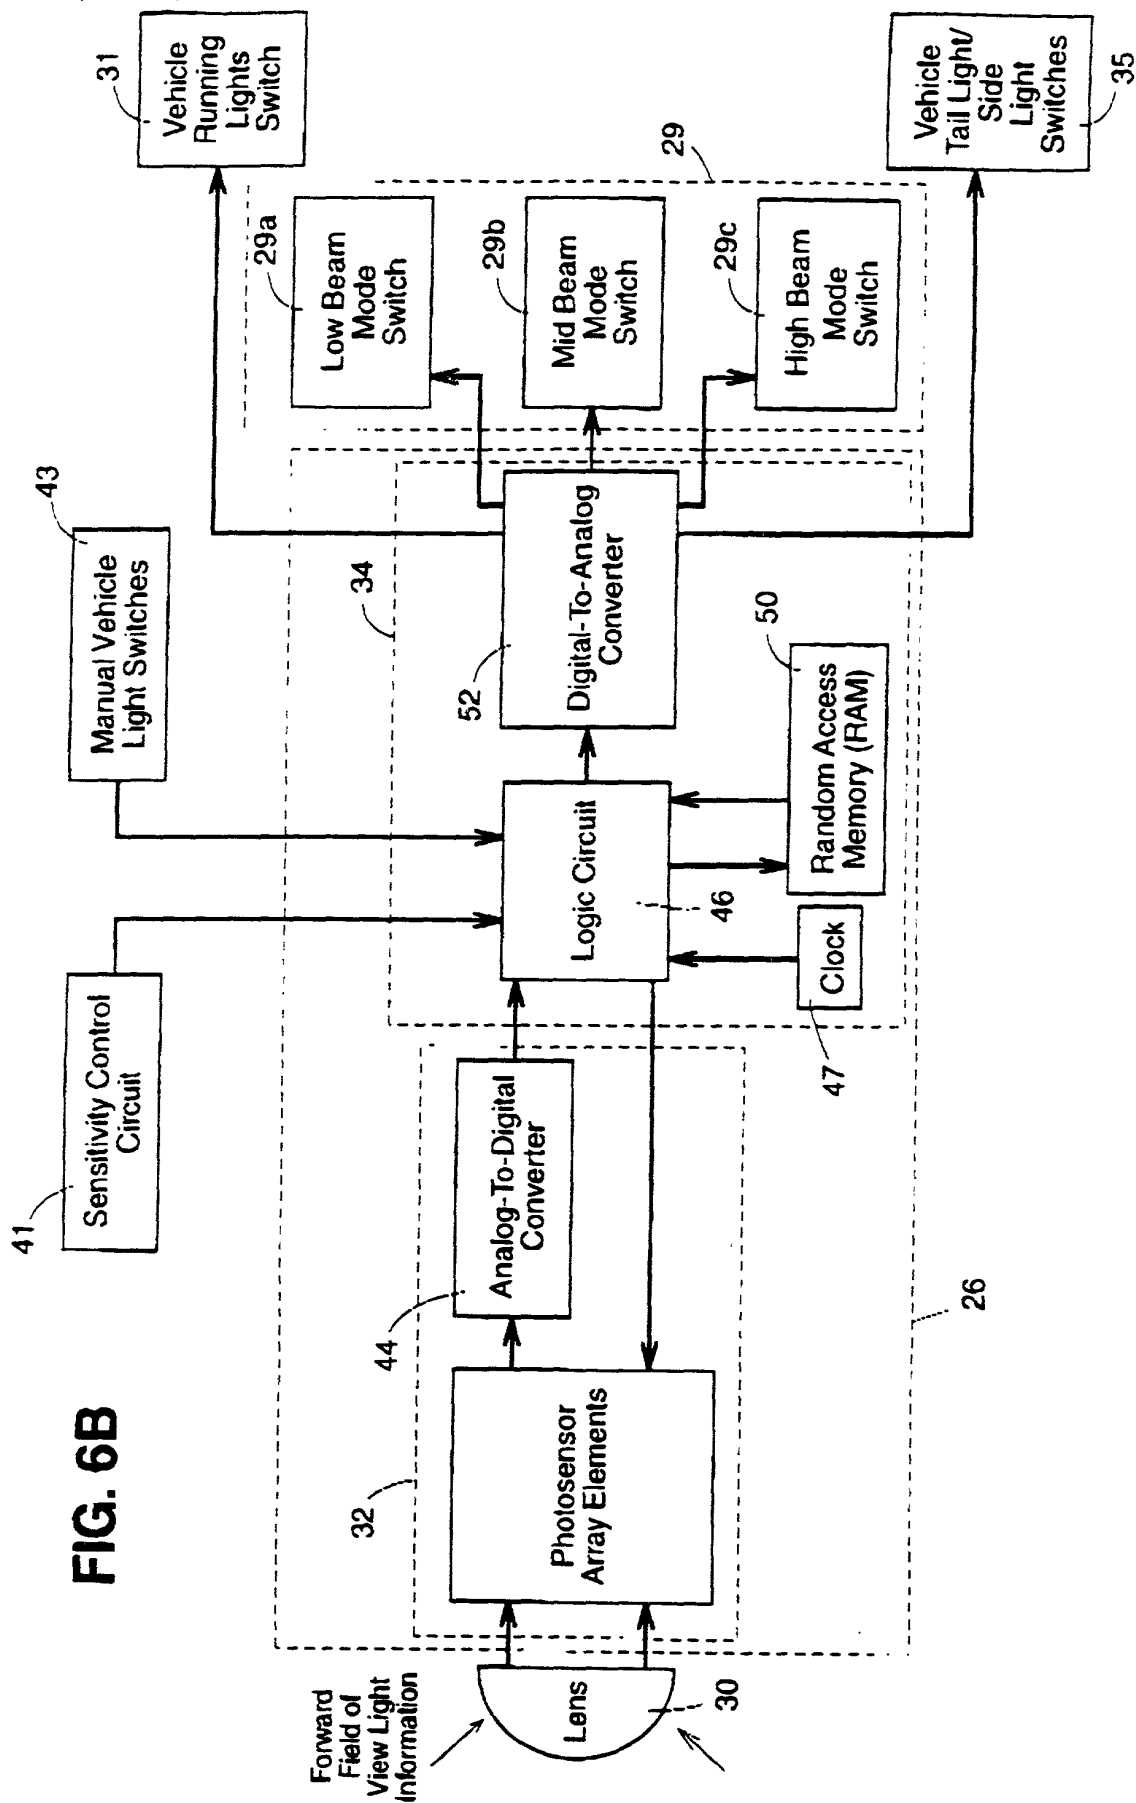


FIG. 7

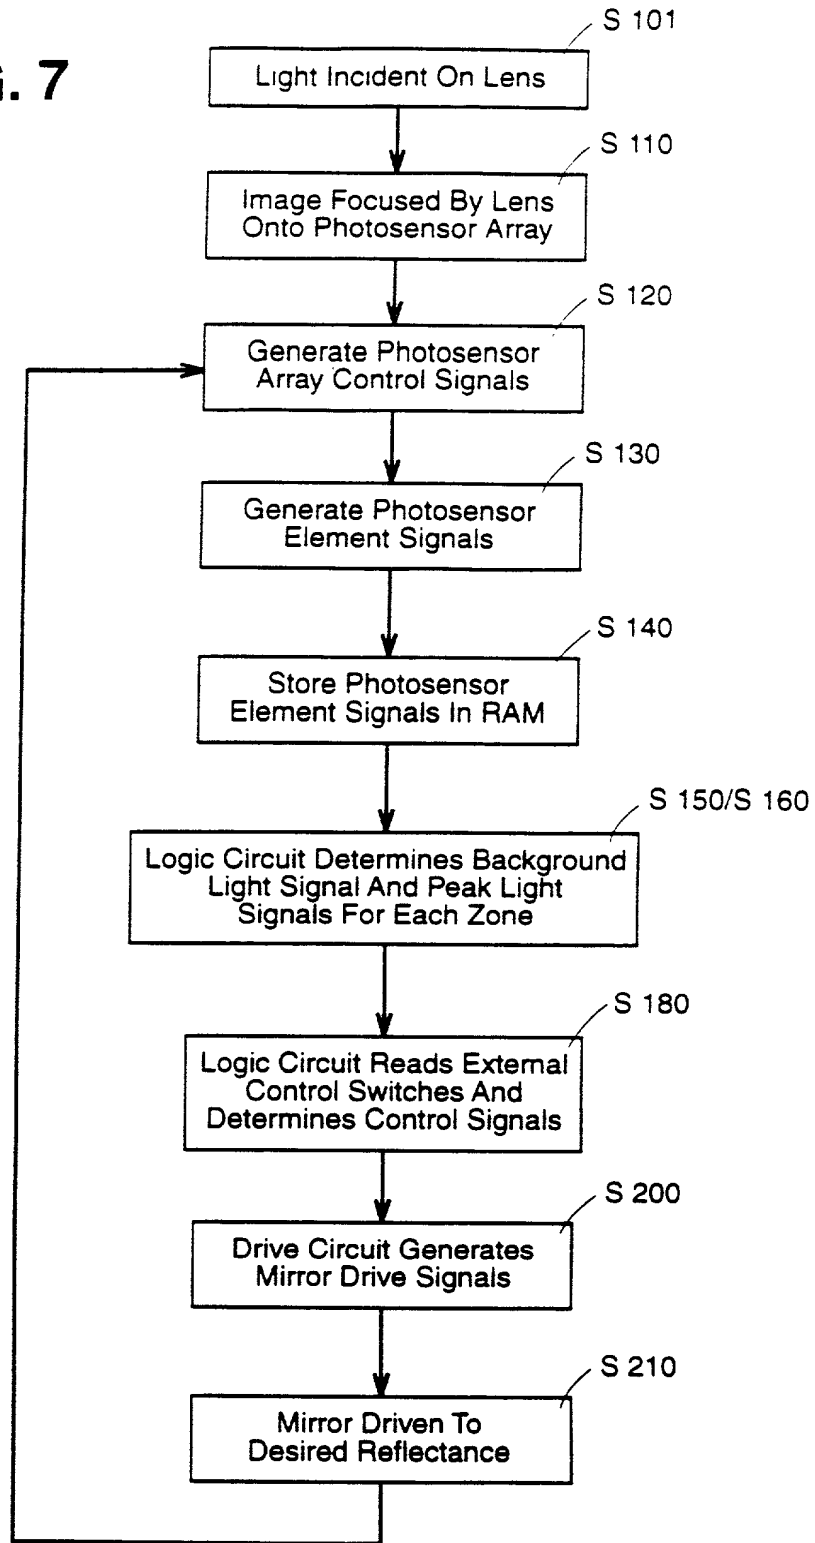


FIG. 8A

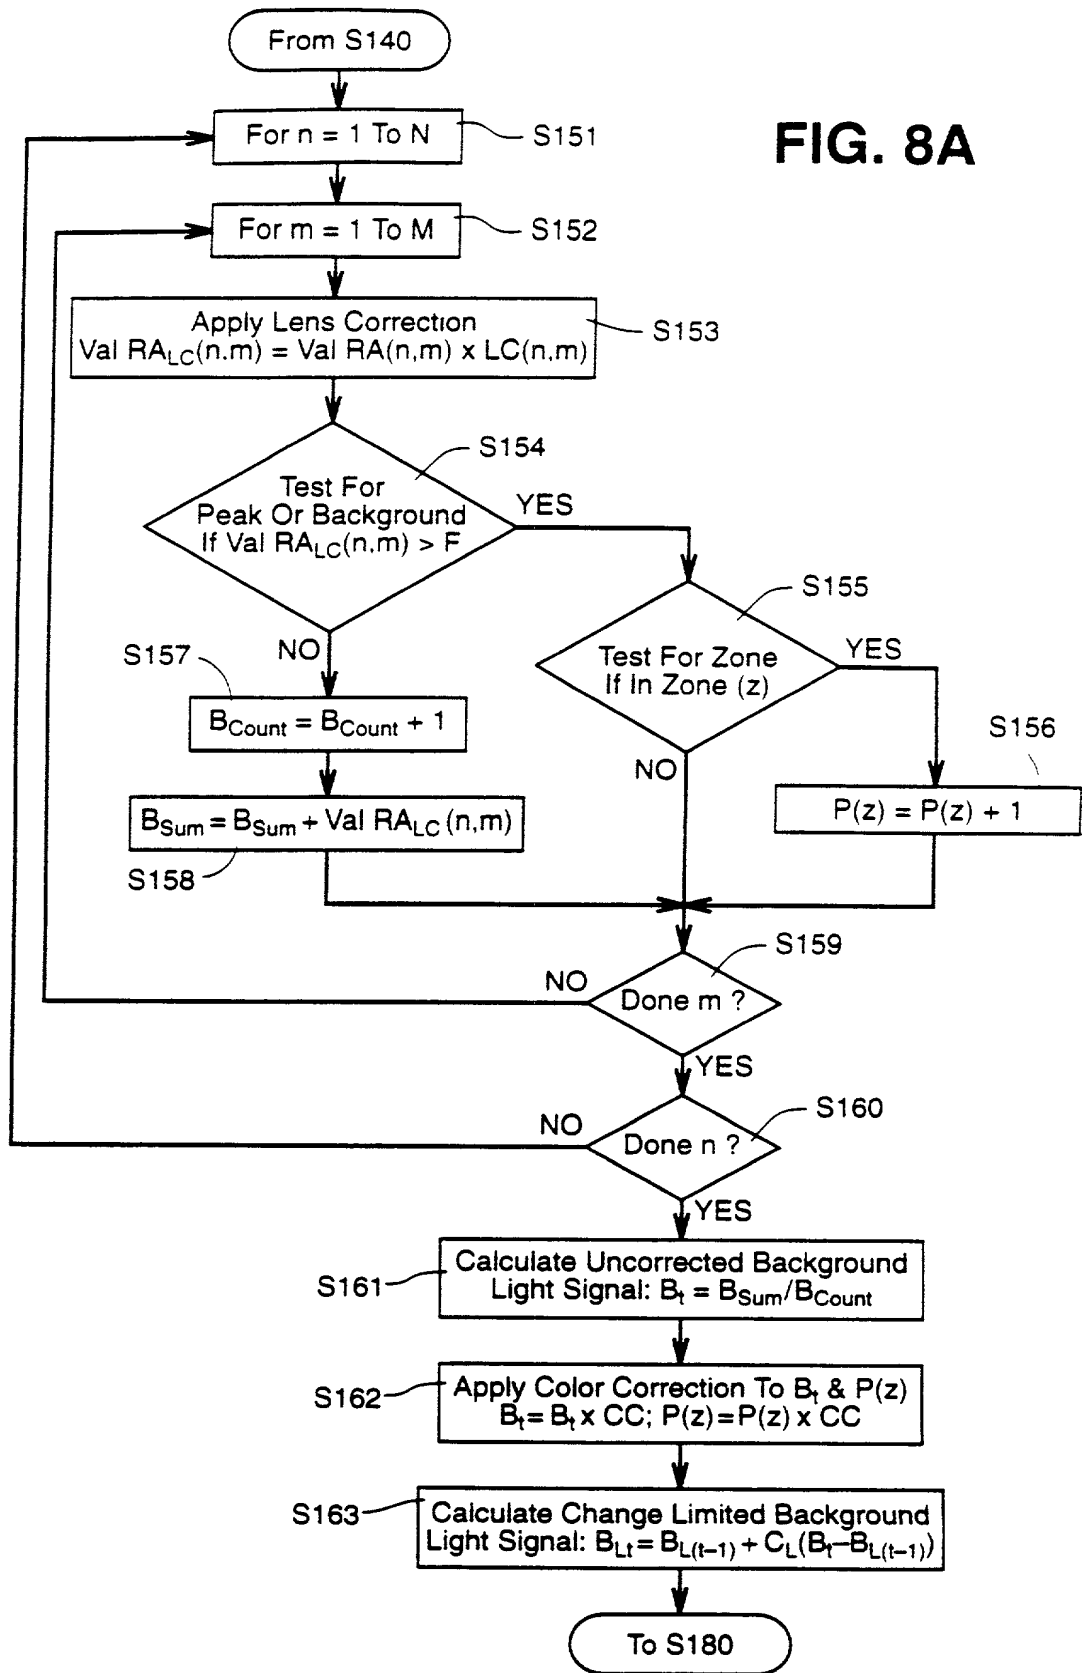


FIG. 8B

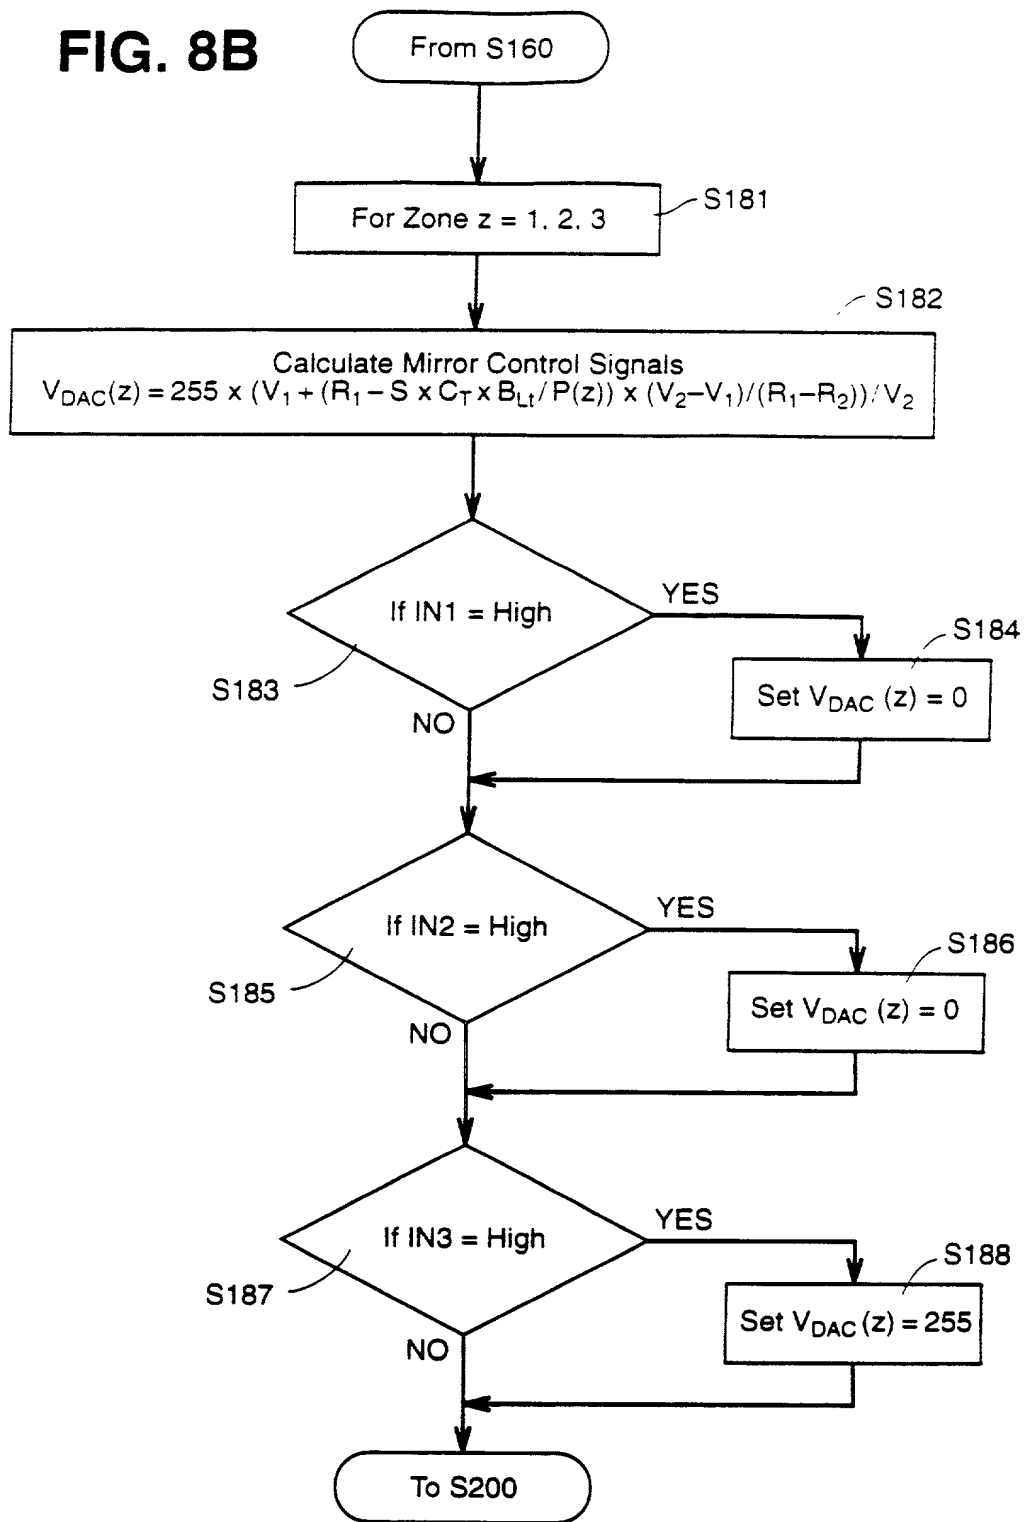
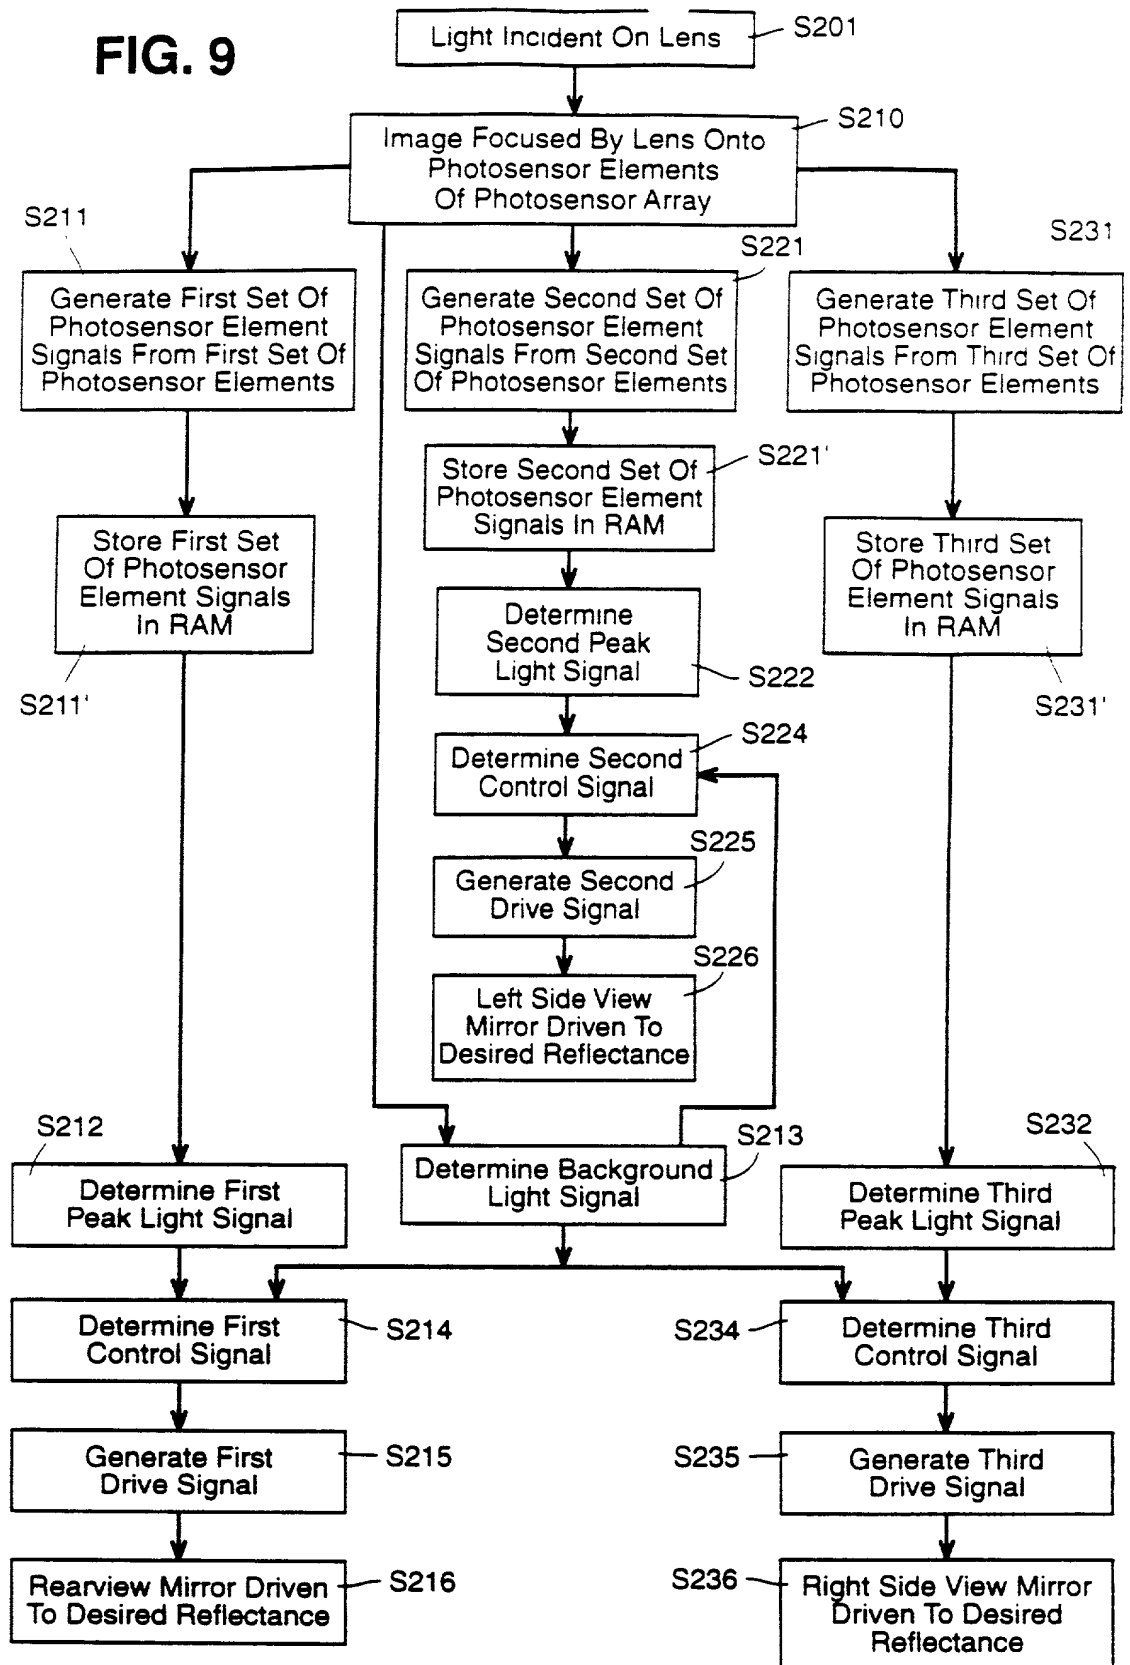


FIG. 9



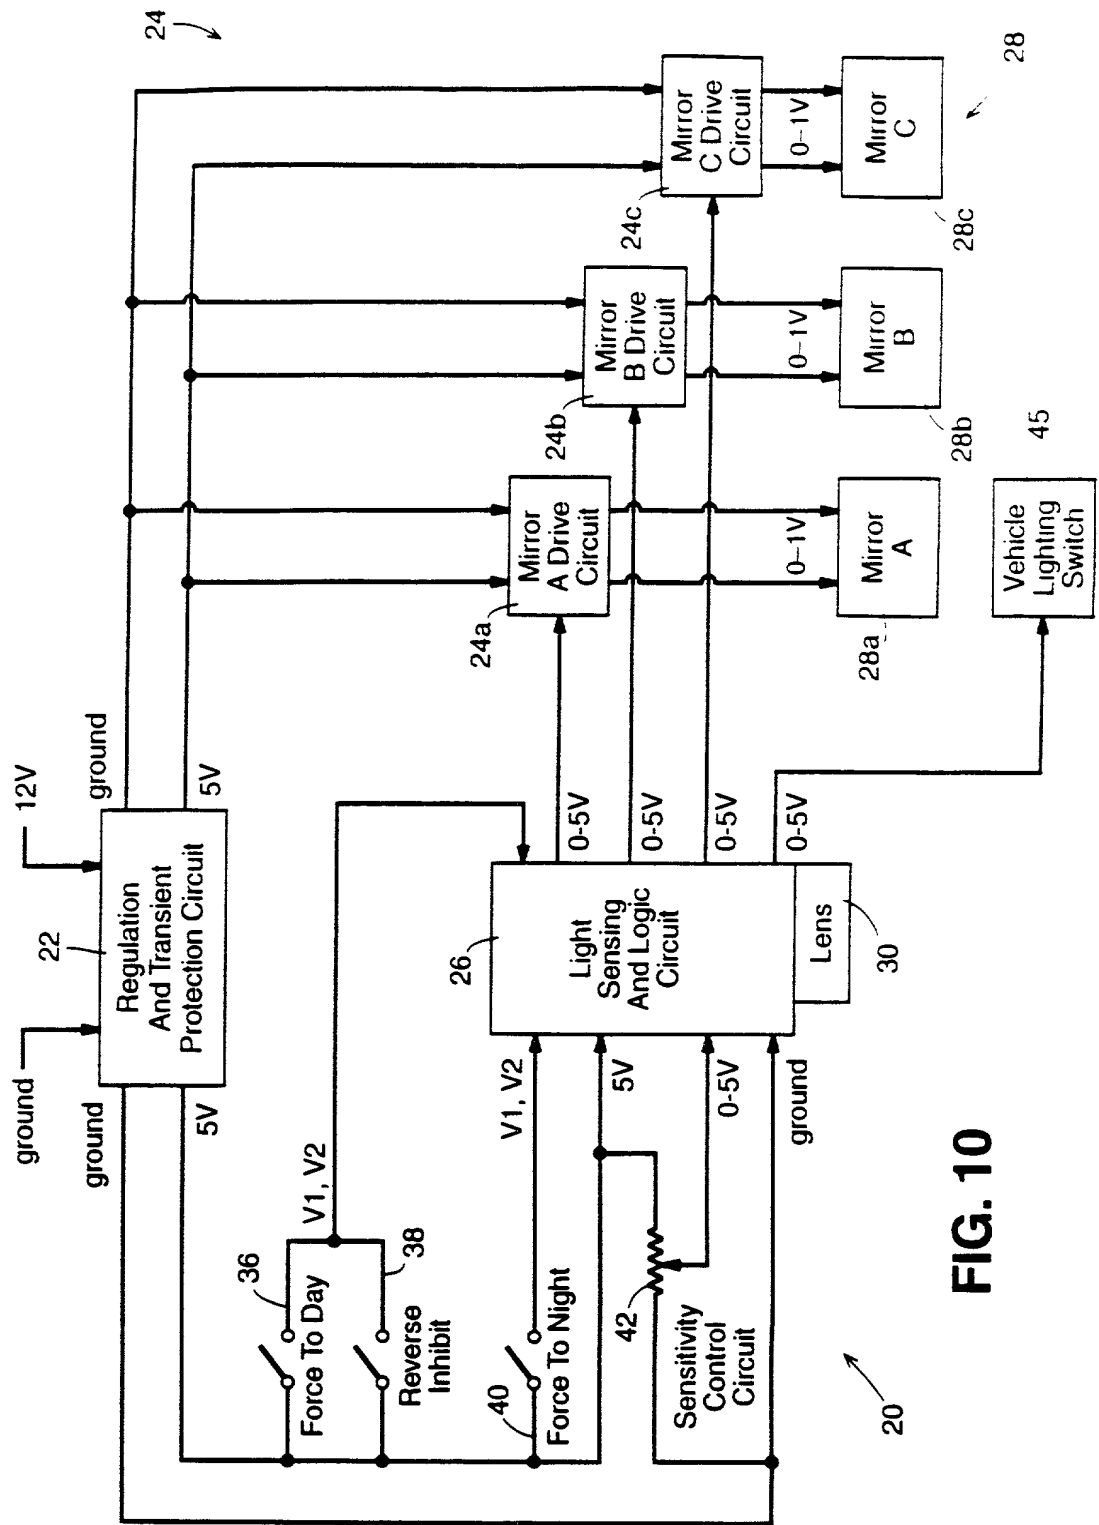


FIG. 10

FIG. 10A

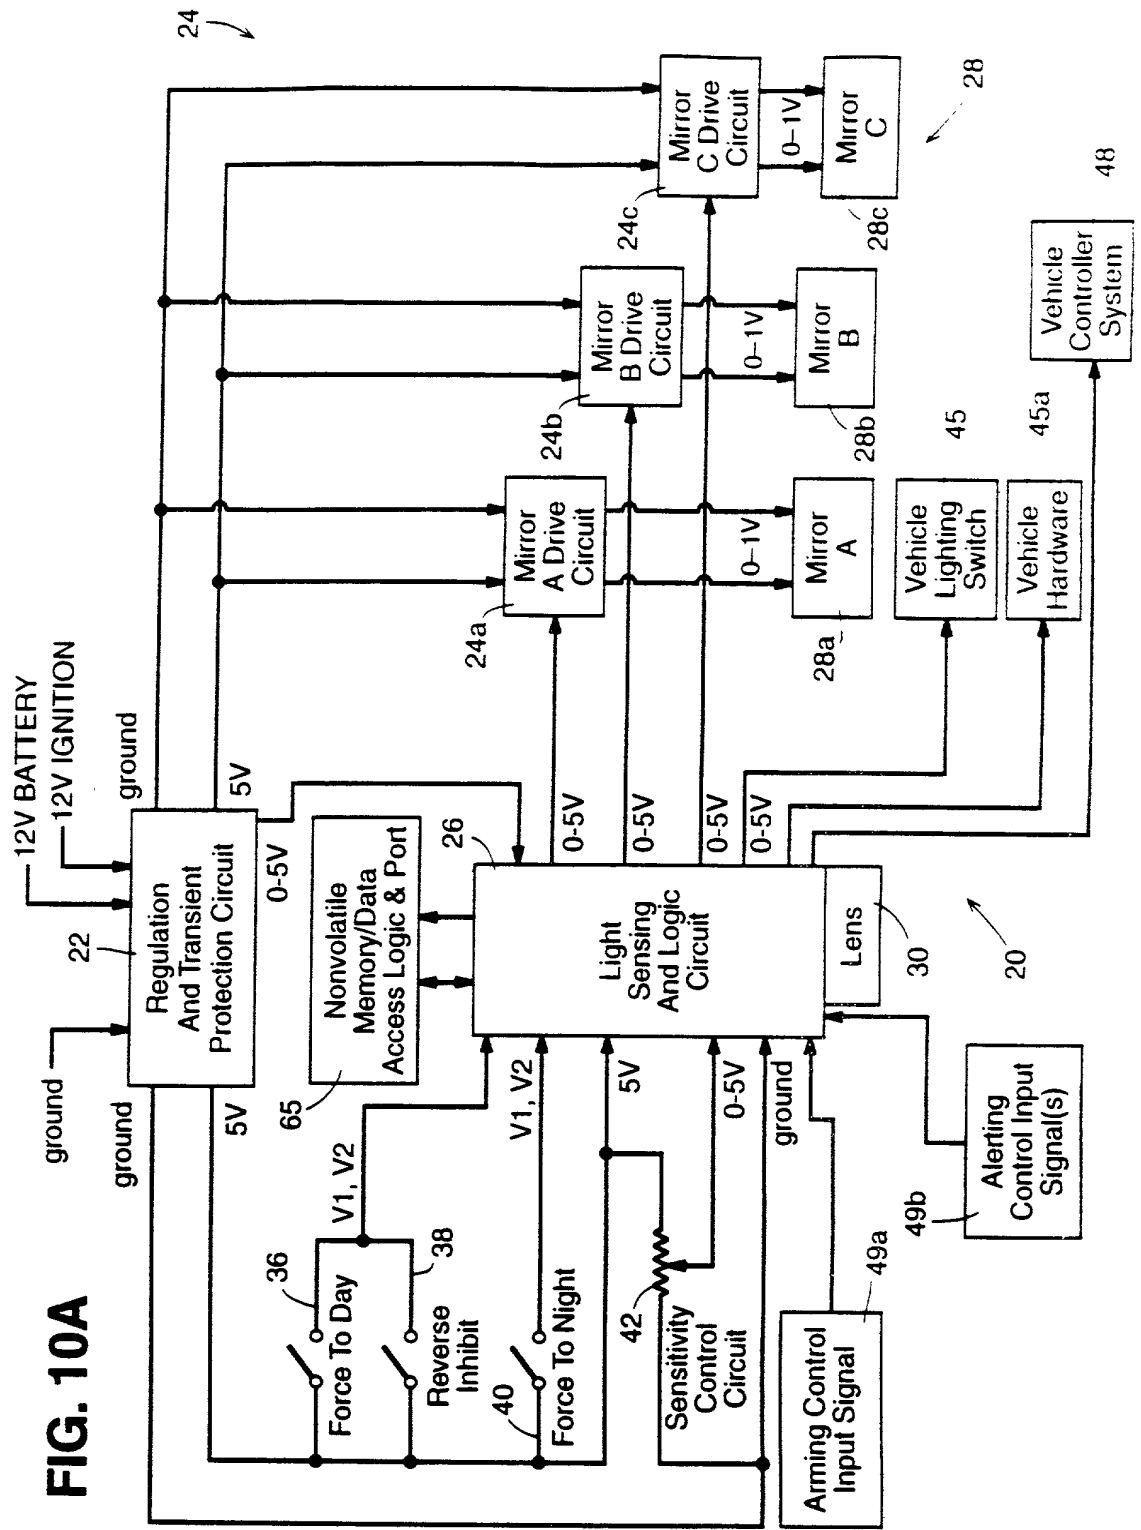


FIG. 11A

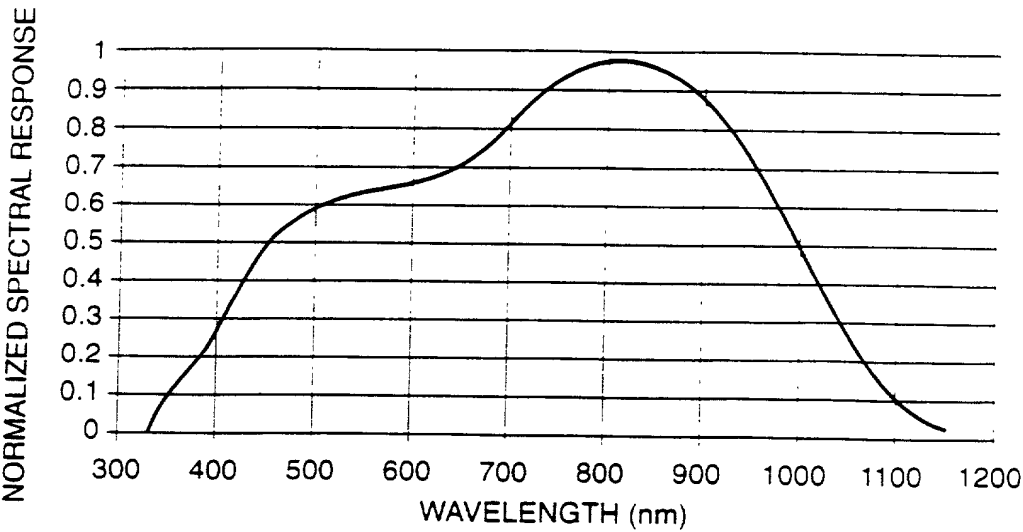


FIG. 11B


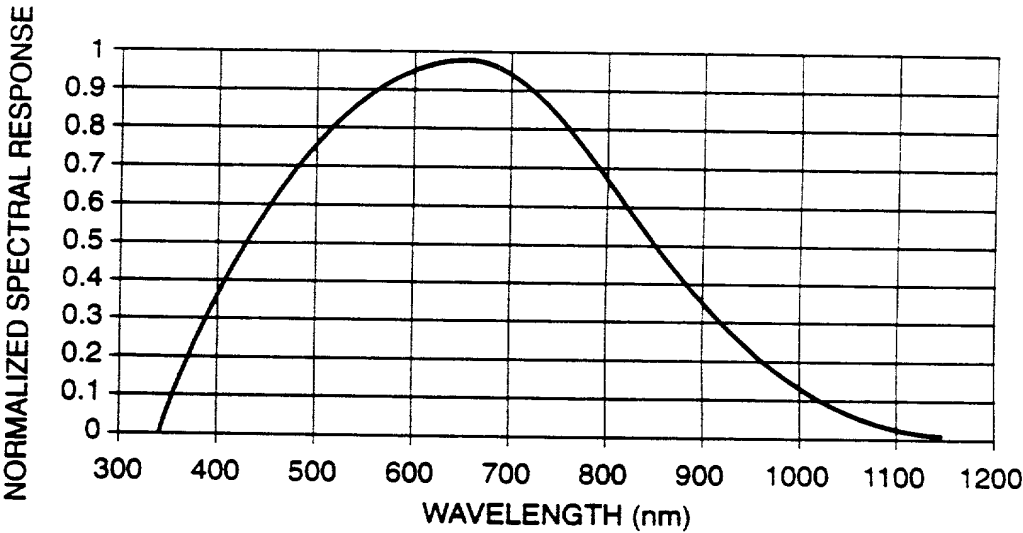


FIG. 12

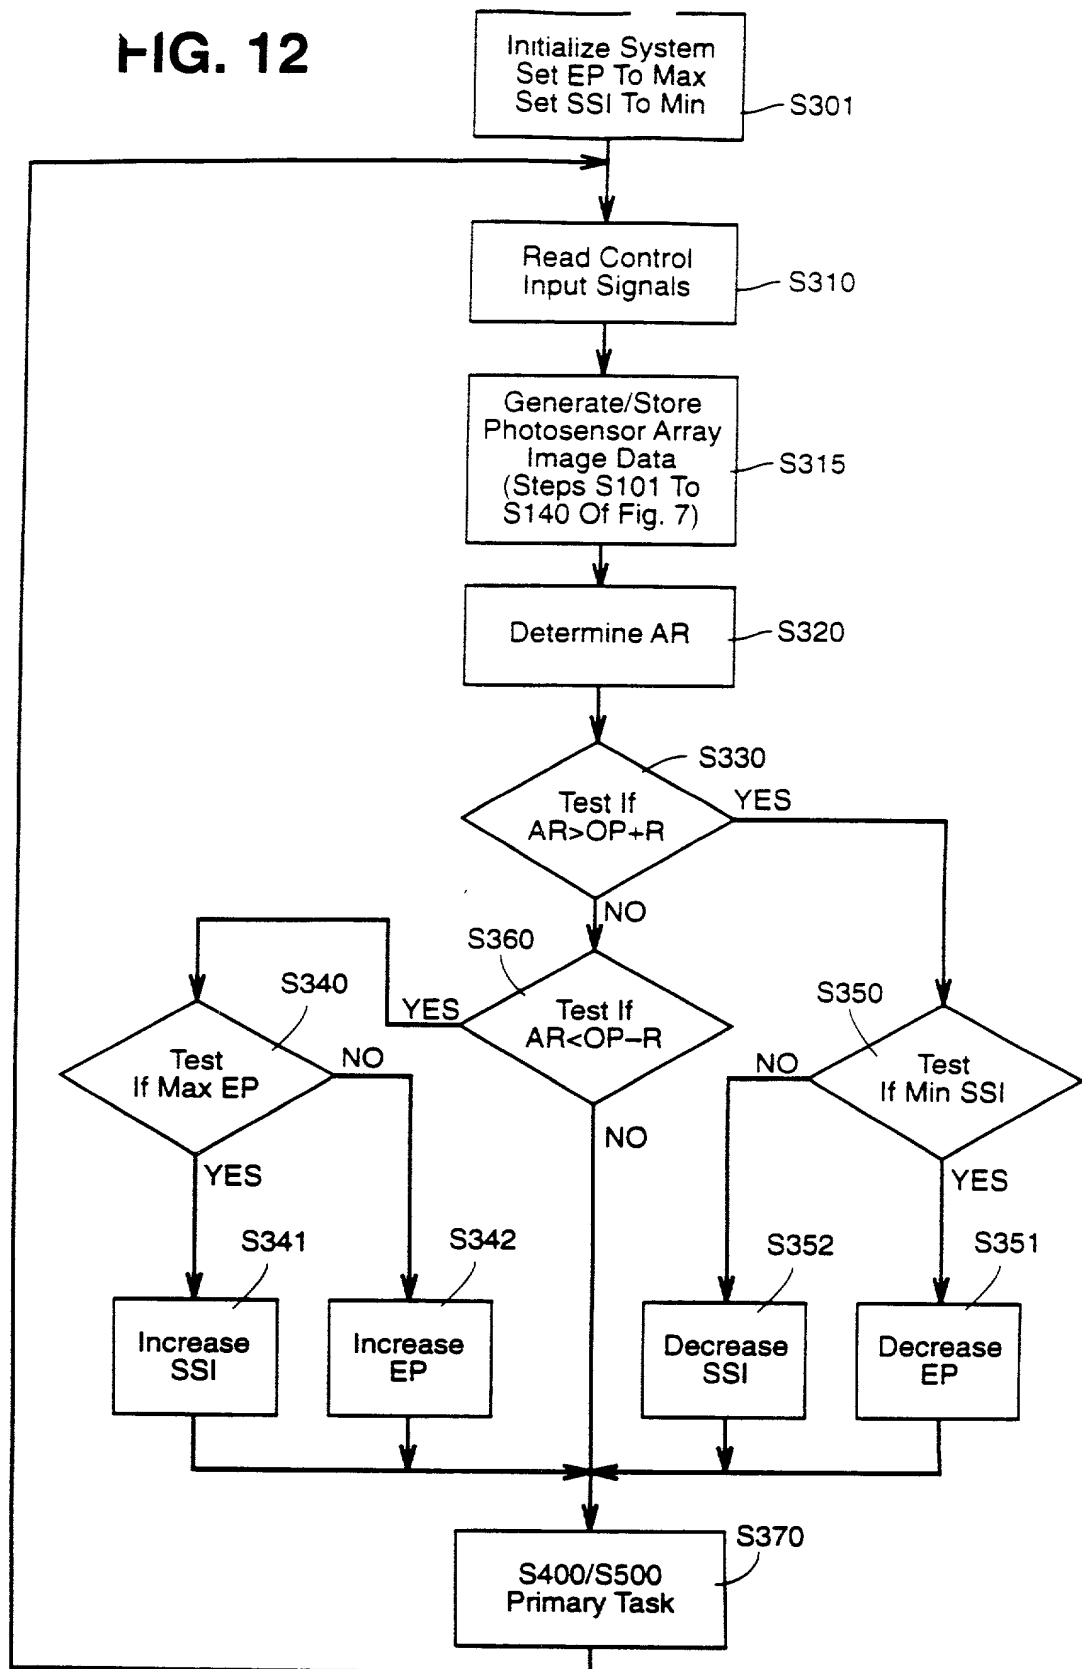

660070 the 2360

FIG. 12A

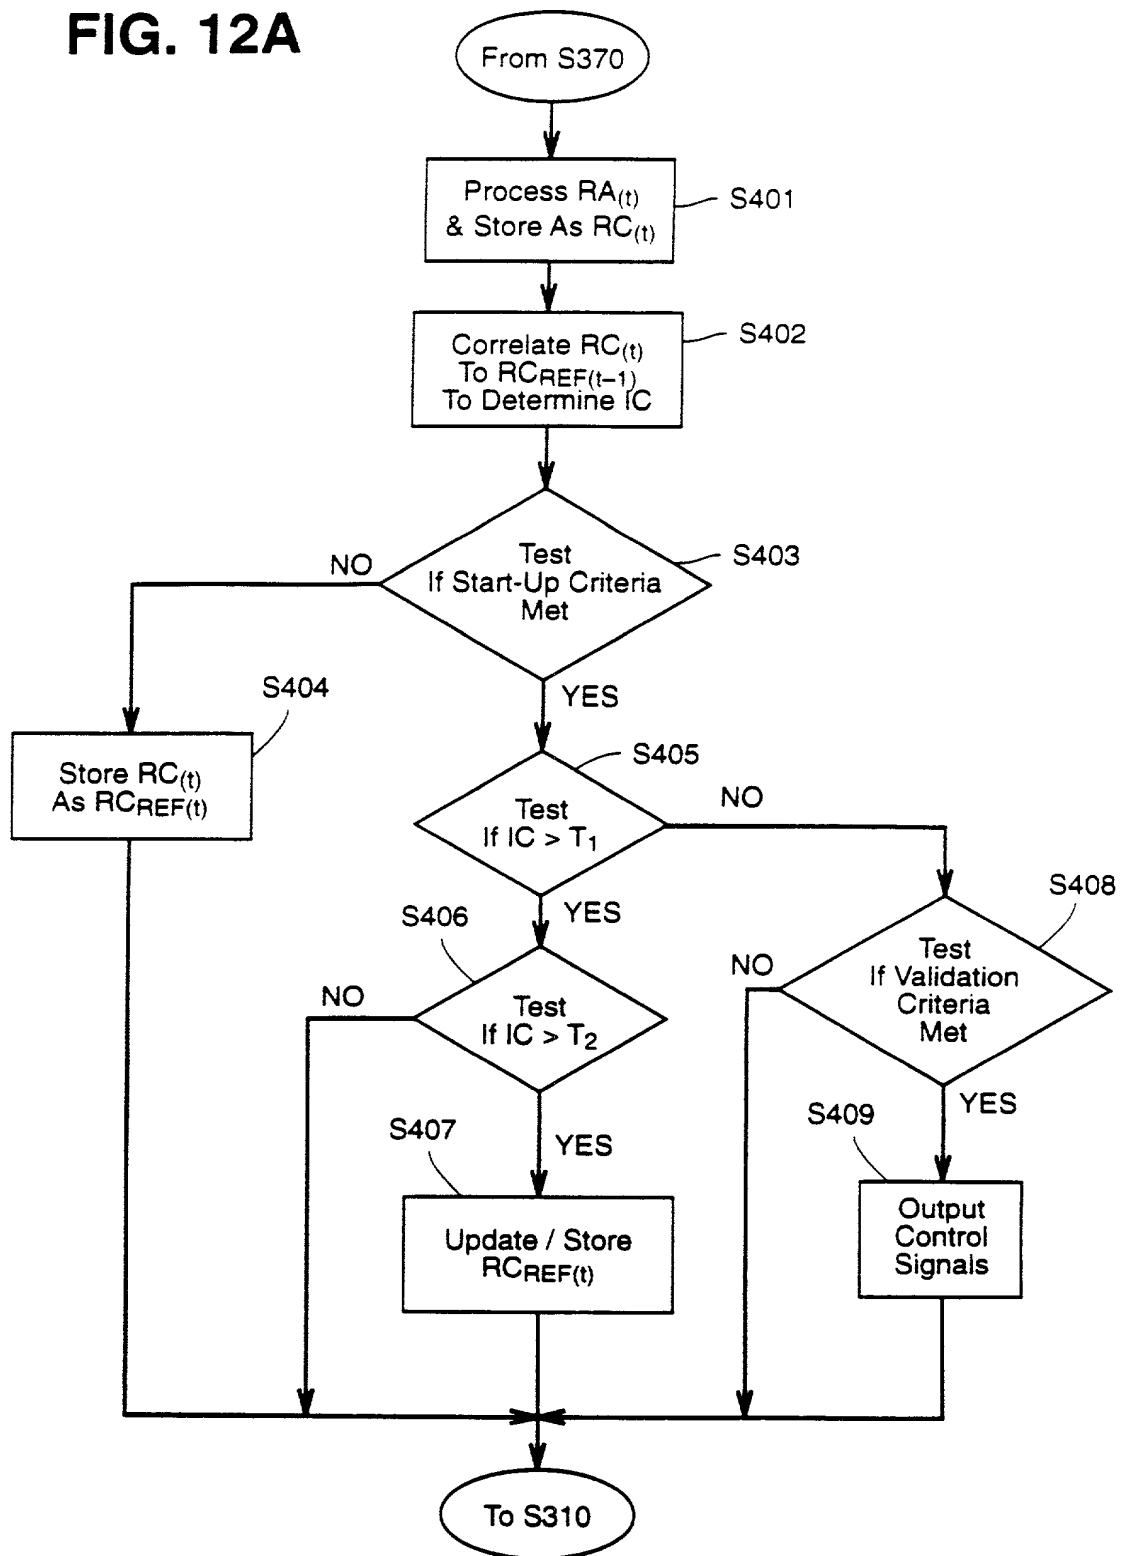


FIG. 12B

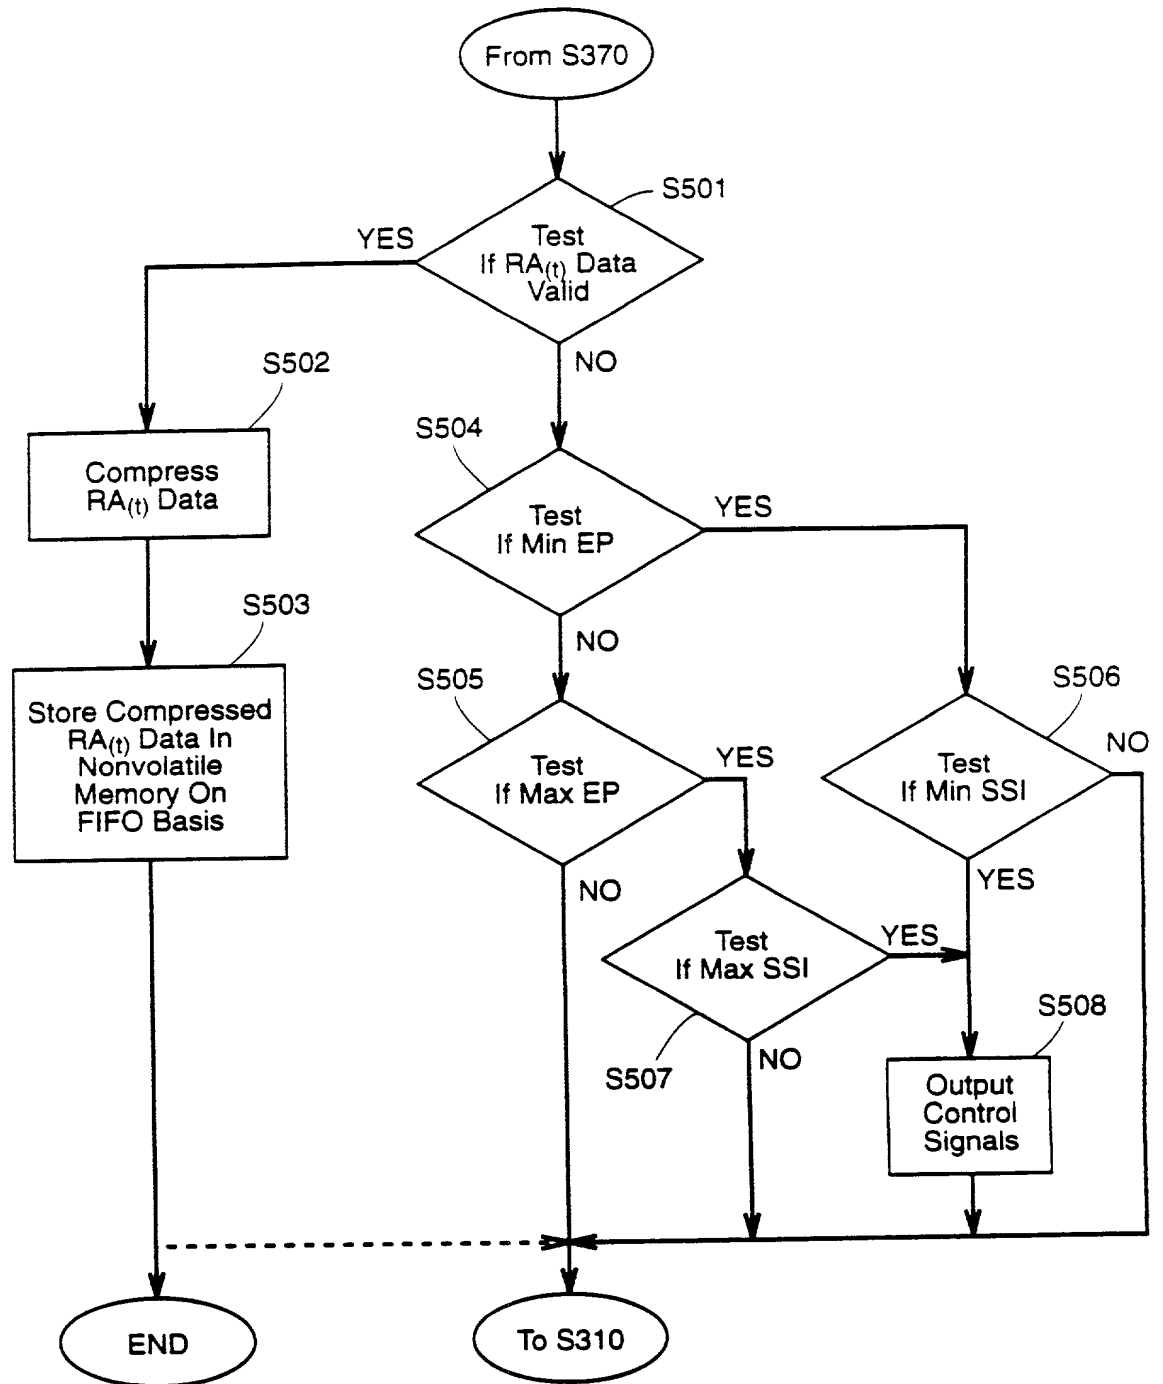


FIG. 13A

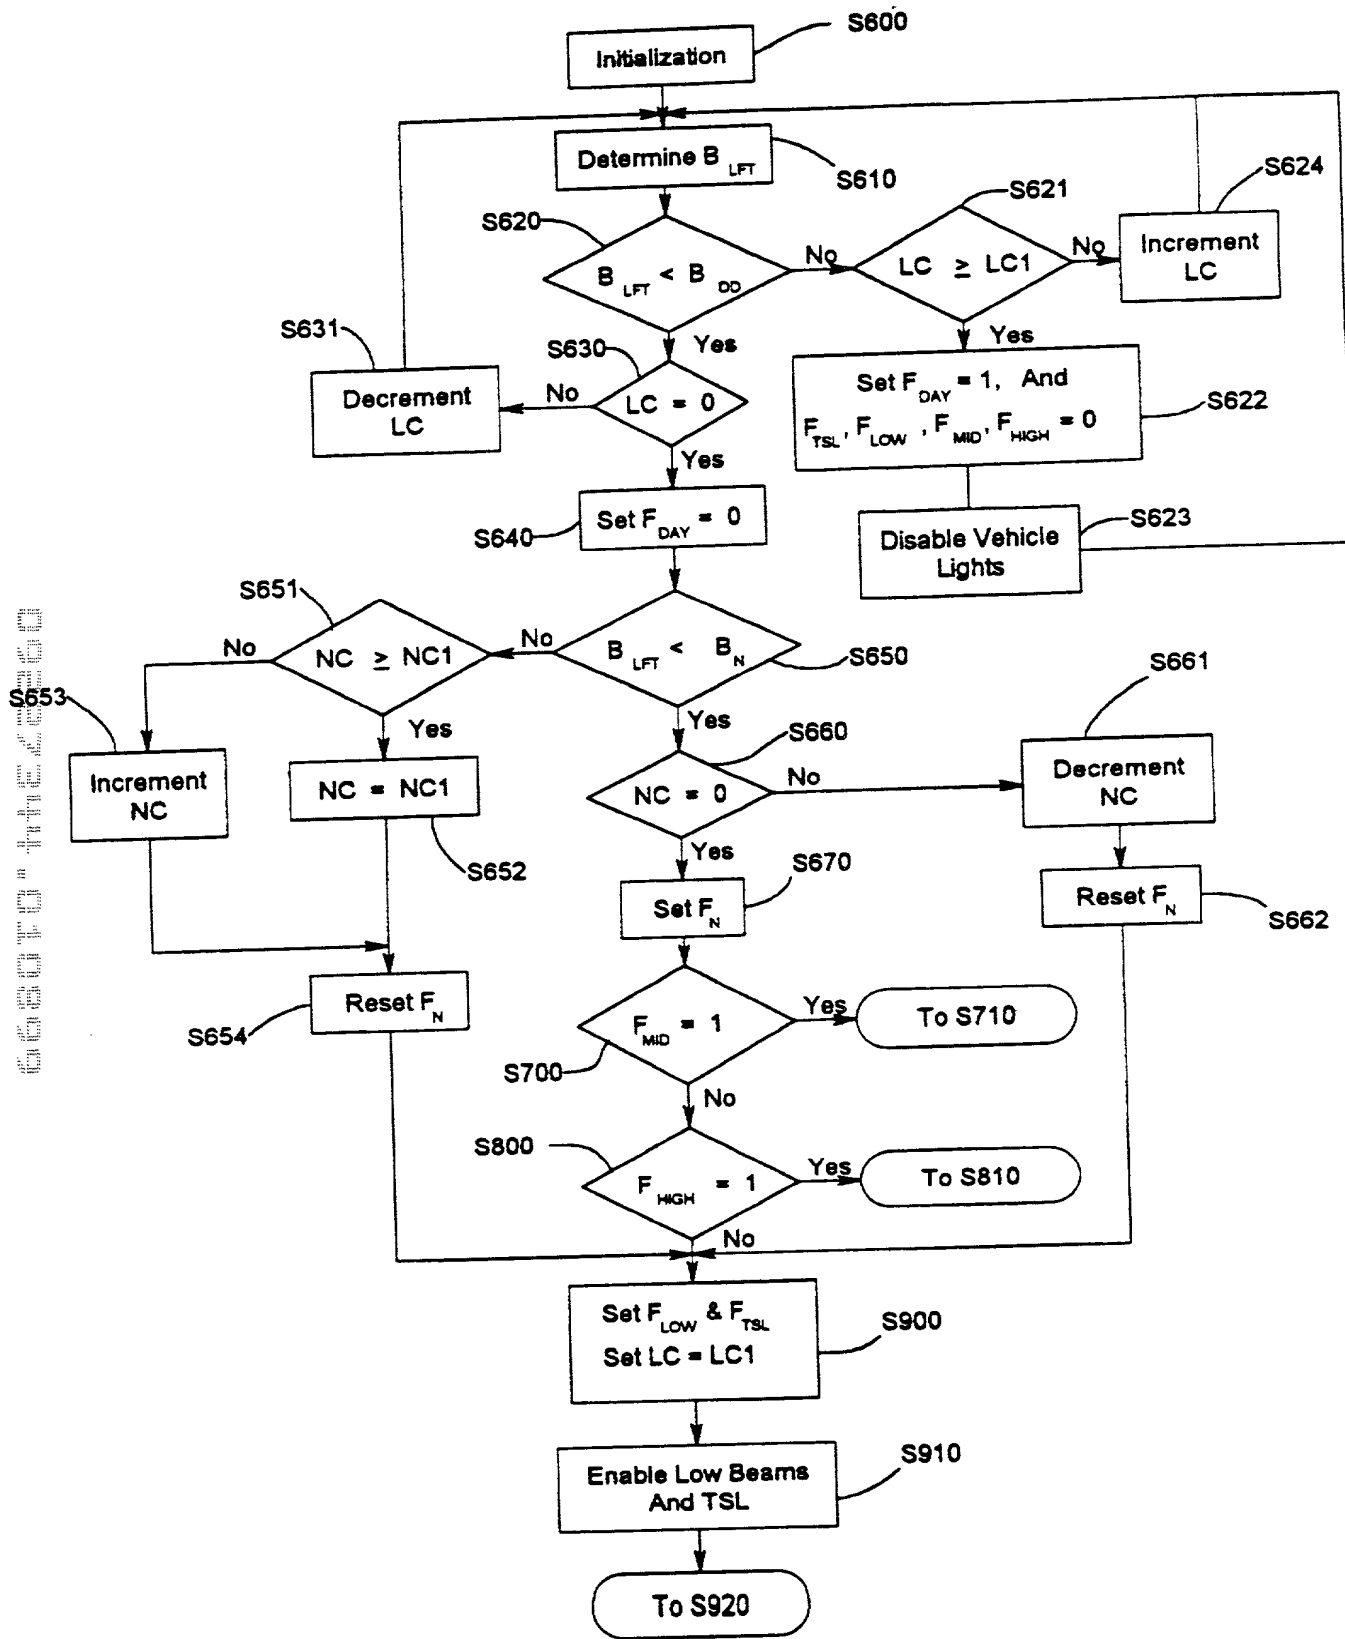


FIG. 13B

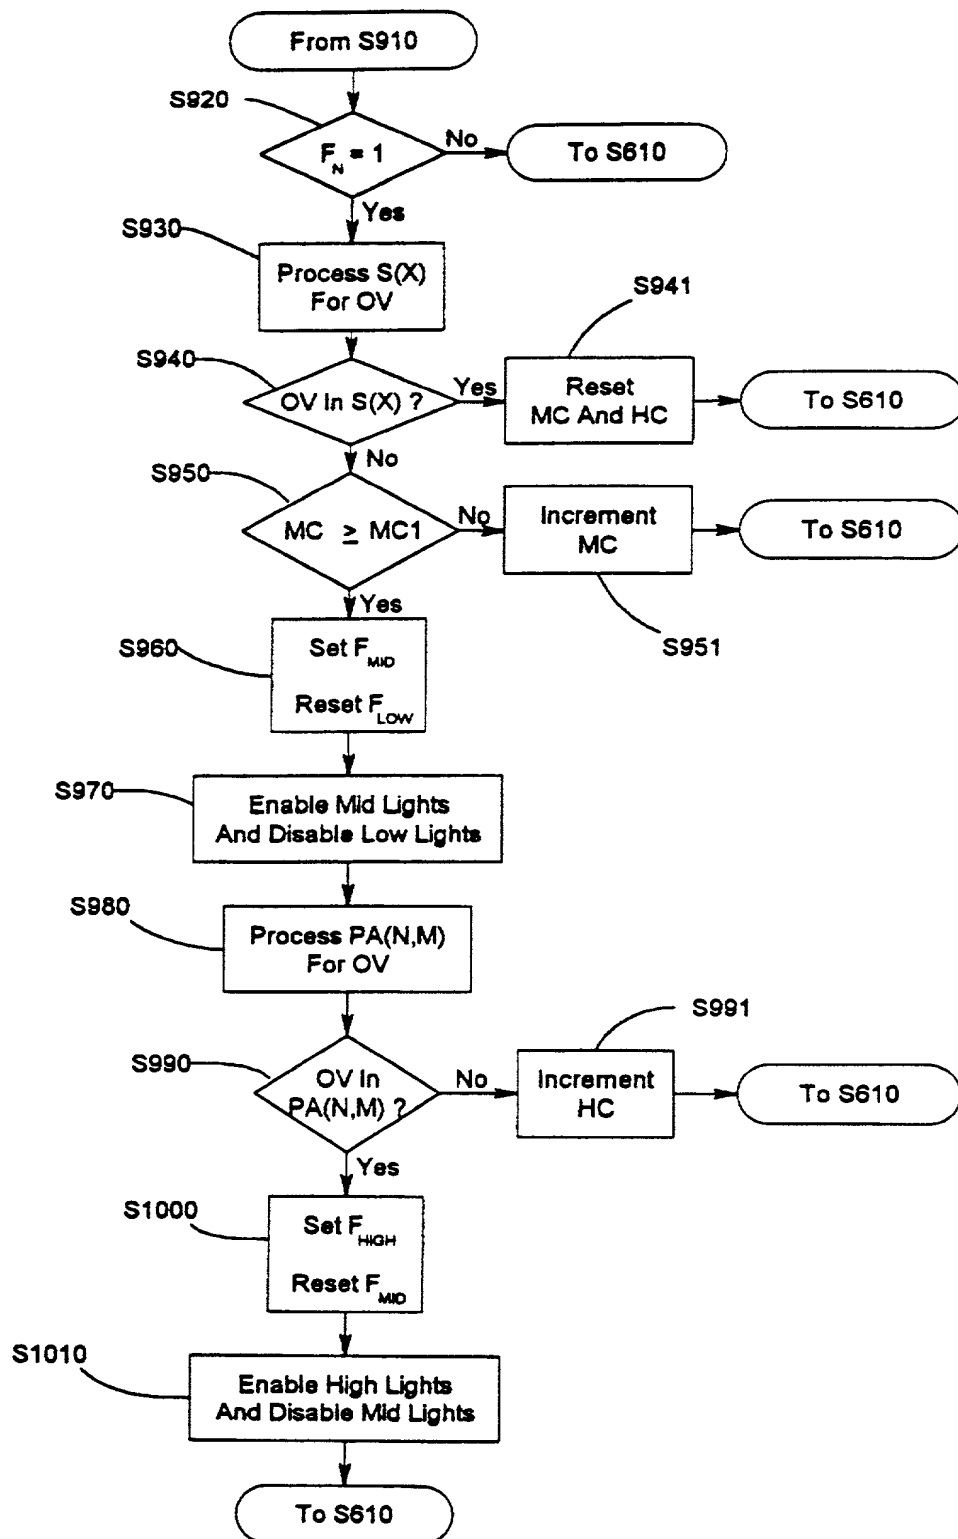


FIG. 13C


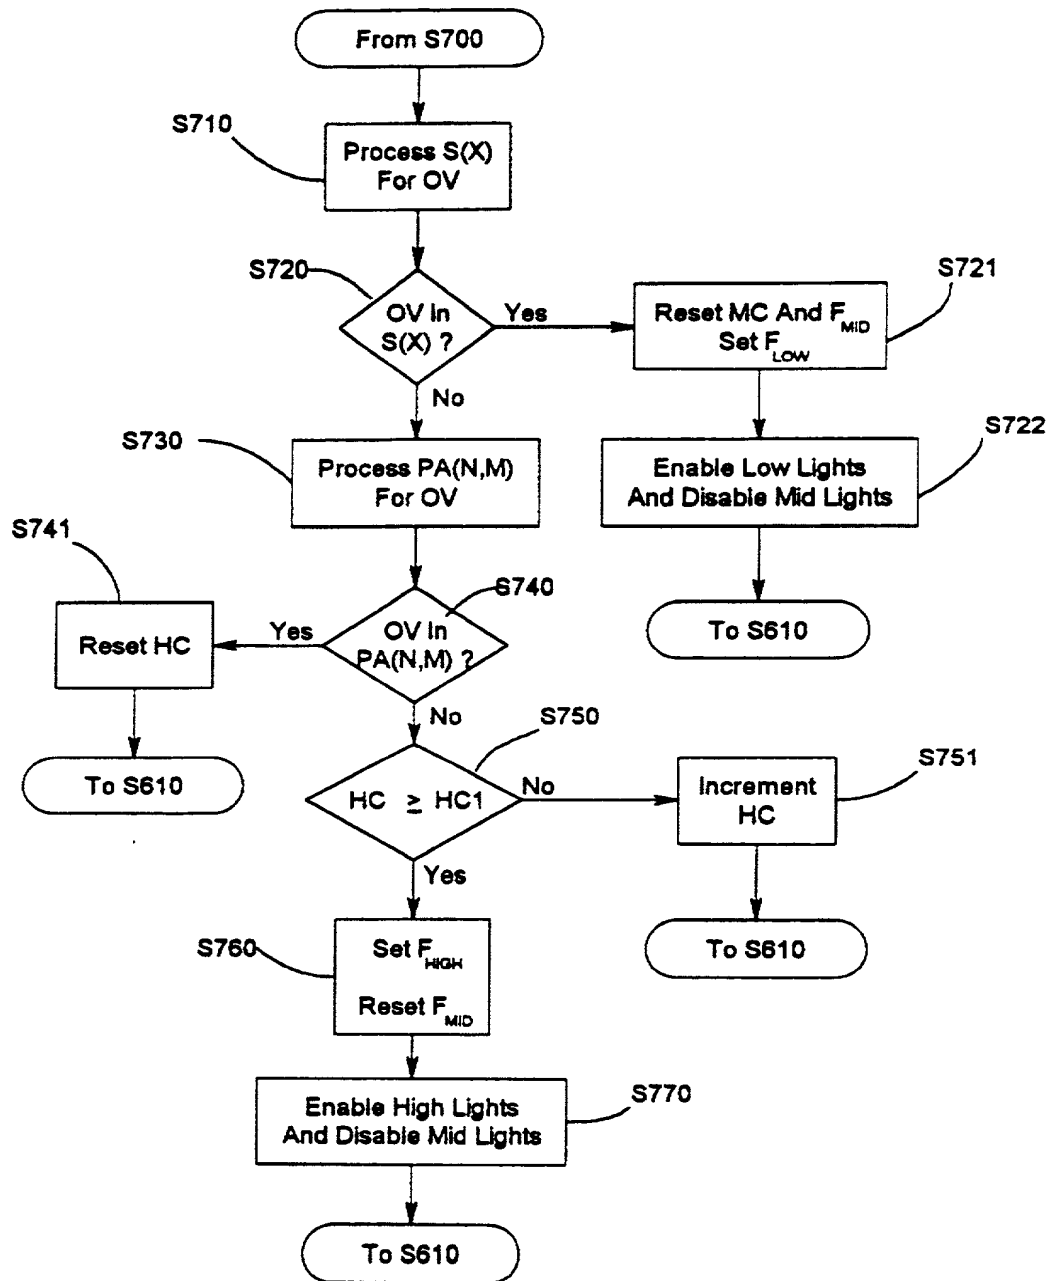


FIG. 13D

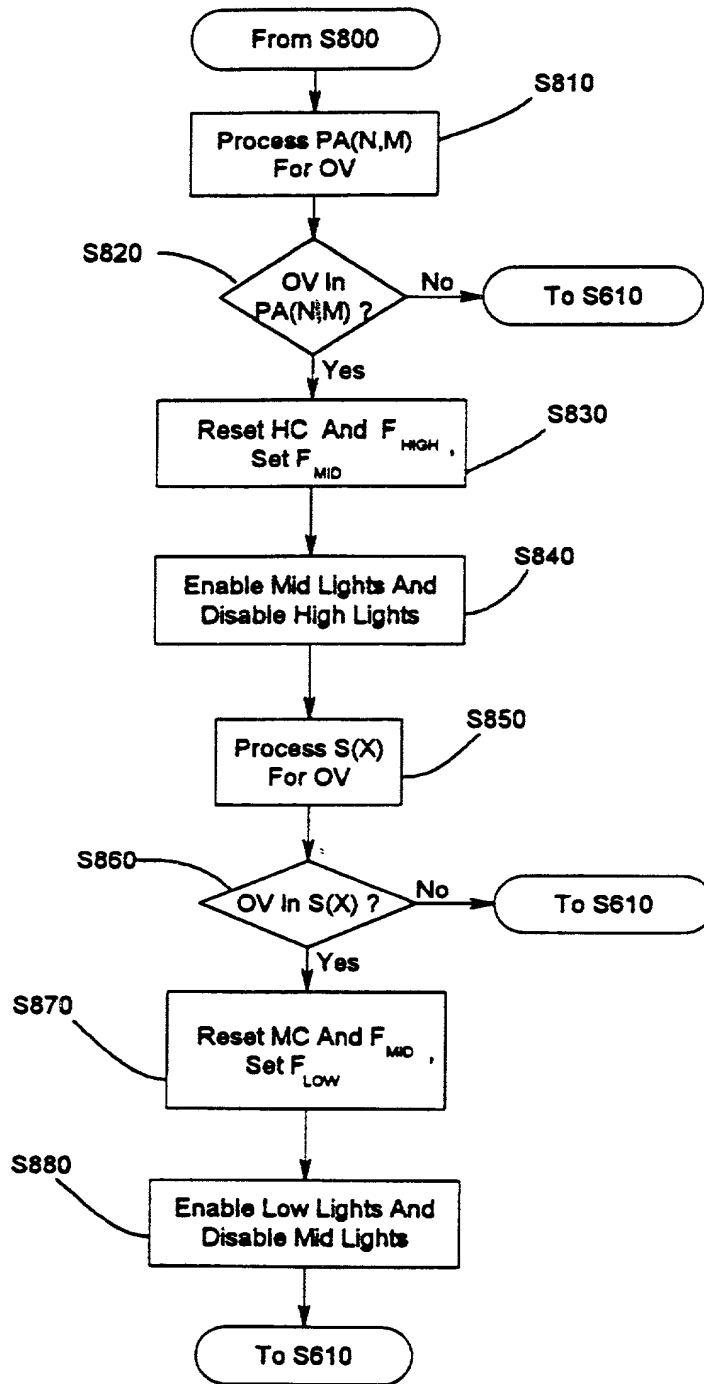

690.2200 PCT/CIP/CI

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
KENNETH SCHOFIELD, et al.) Examiner: T. Nguyen
Appln. No.: To be filed) Group Art Unit: 2872
Filed: January 8, 1999)
For: AUTOMATIC REARVIEW)
MIRROR, VEHICLE)
LIGHTING CONTROL AND)
VEHICLE INTERIOR)
MONITORING SYSTEM USING) January 8, 1999
A PHOTSENSOR ARRAY)

**[This application is a continuation
of Appln. No. 08/478,093, filed
June 7, 1995]**

Assistant Commissioner of Patents
Washington, D.C. 20231

LETTER TRANSMITTING CORRECTED DRAWINGS

Sir:

Transmitted herewith are six (6) sheets of formal drawings to be substituted for the corresponding drawing sheets presently on file in the above-identified application.

The new drawing sheets incorporate the changes approved by the Examiner in the papers dated September 3, 1998 in parent application No. 08/478,093.

Applicants' undersigned attorney may be reached in our Washington office by telephone at (202) 530-1010. All

correspondence should continue to be directed to our below
listed address.

Respectfully submitted,



Attorney for Applicants

Registration No. 51,558

FITZPATRICK, CELLA, HARPER & SCINTO
30 Rockefeller Plaza
New York, New York 10112-3801
Facsimile: (212) 218-2200

F501\W173148

FIG. 1D

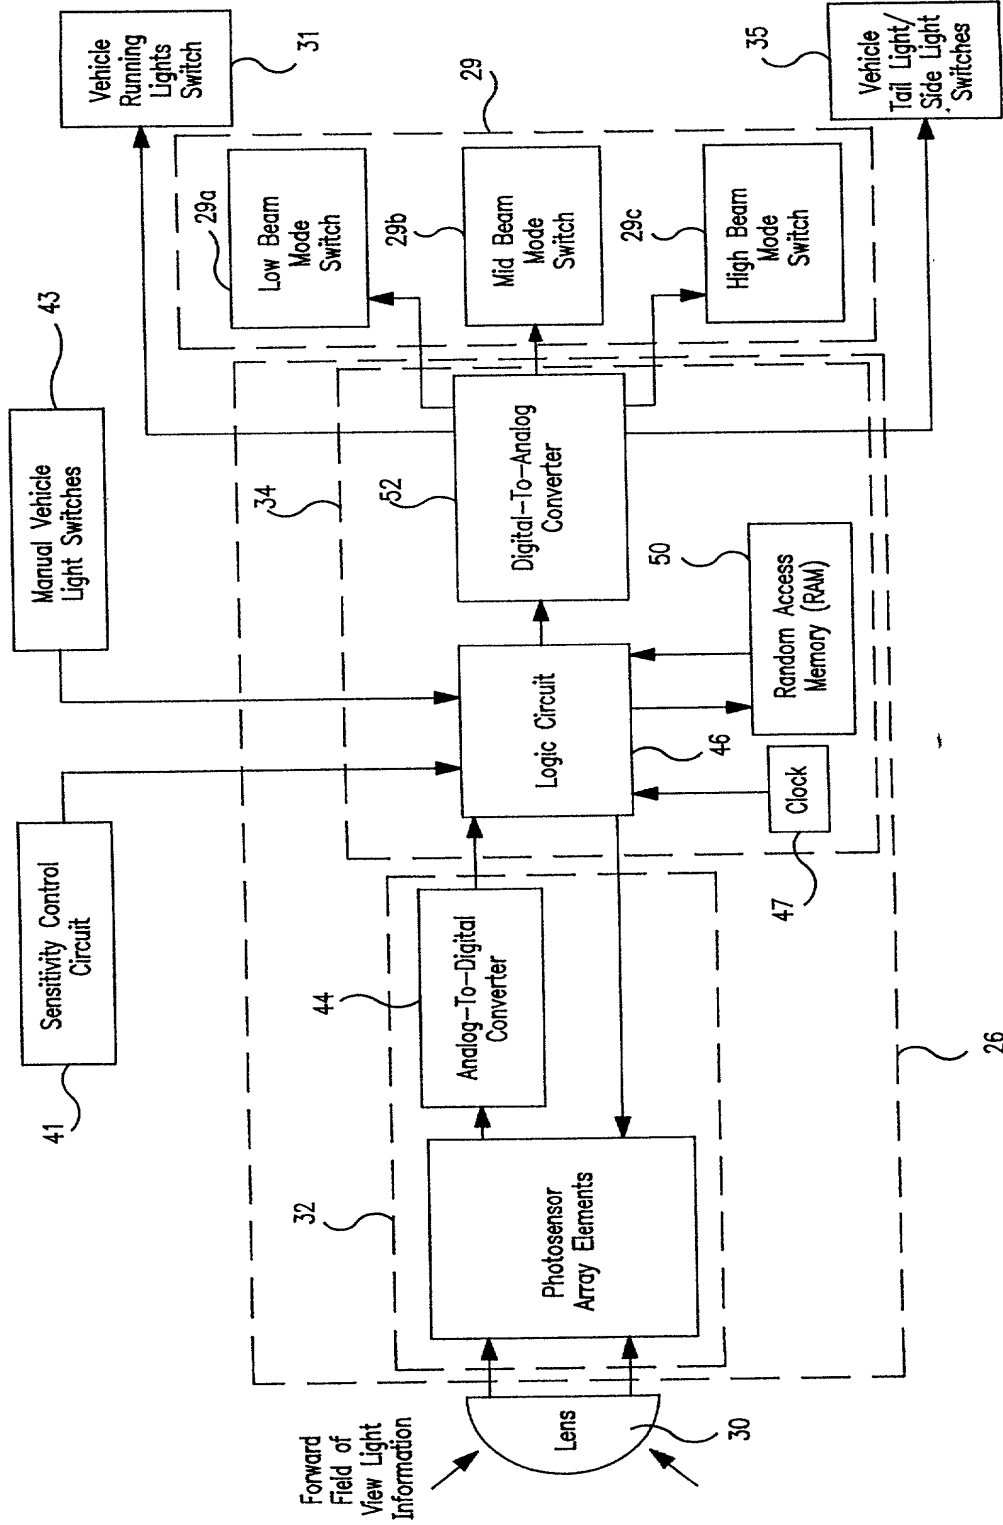


FIG. 6B

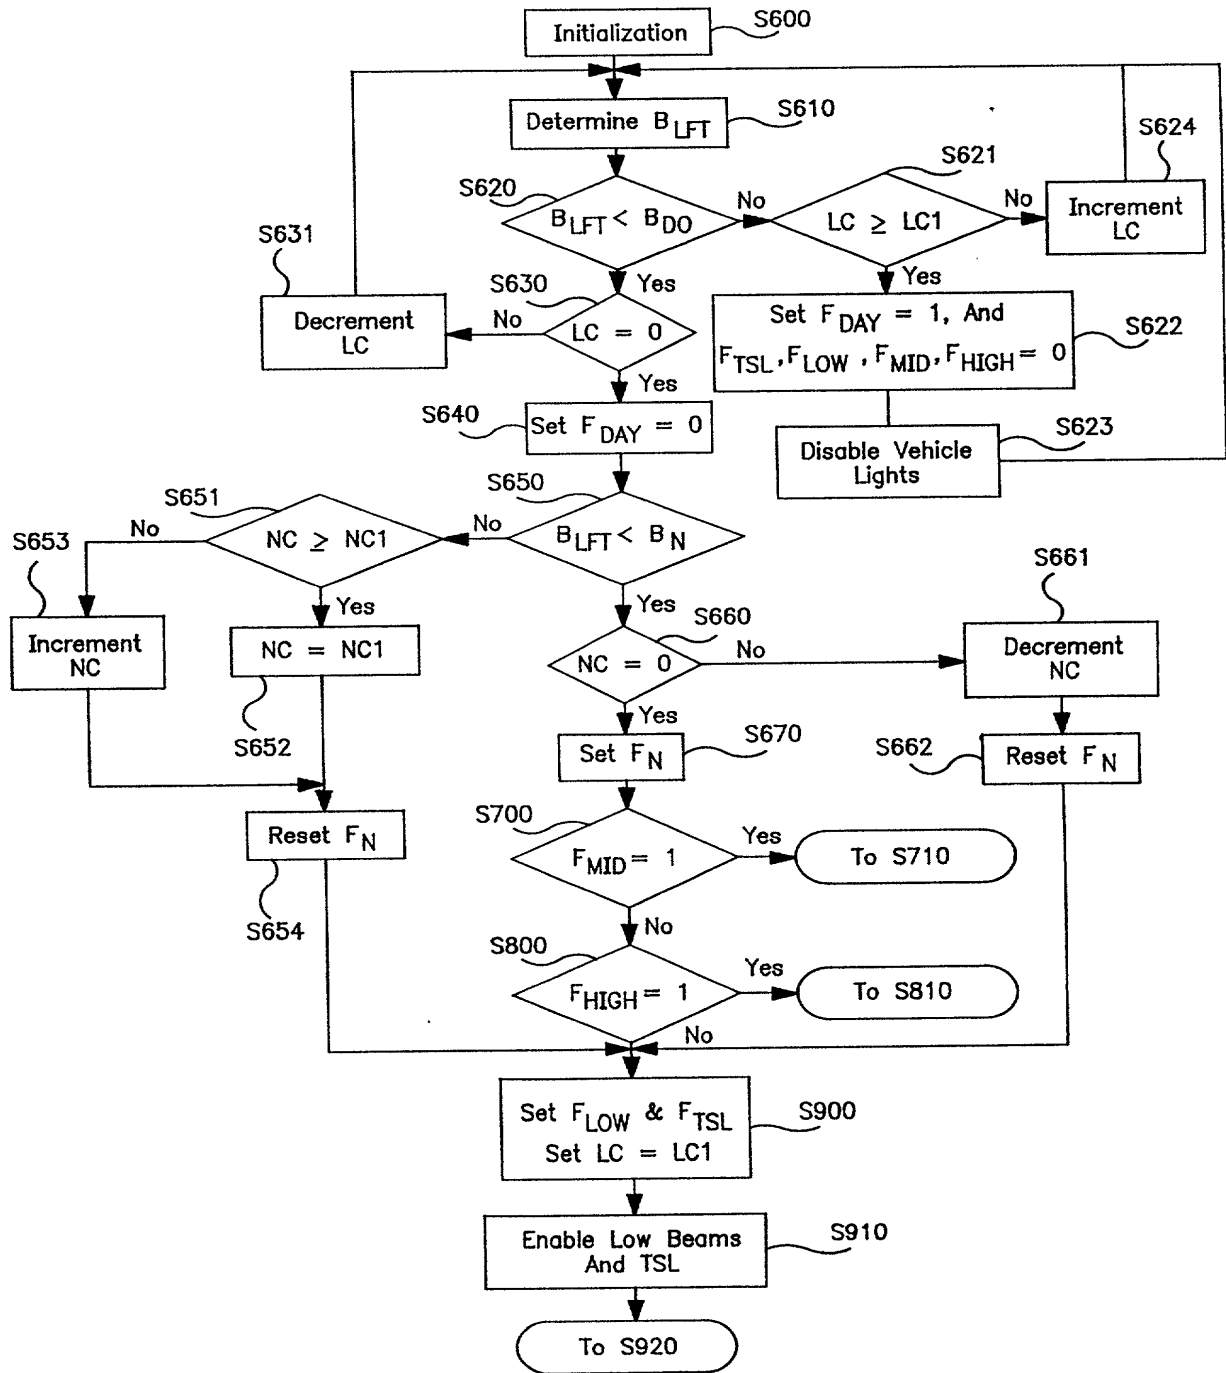


FIG. 13A

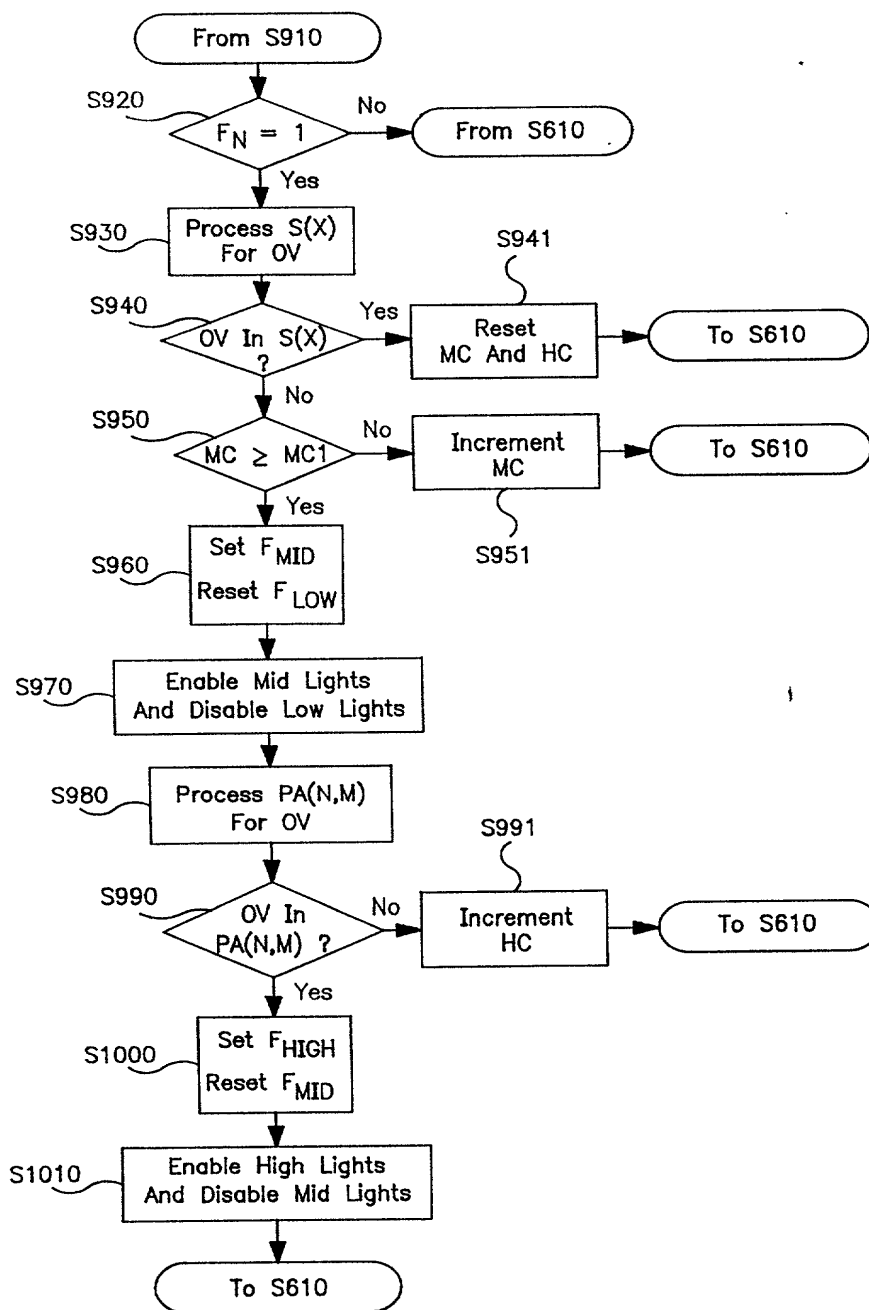


FIG. 13B

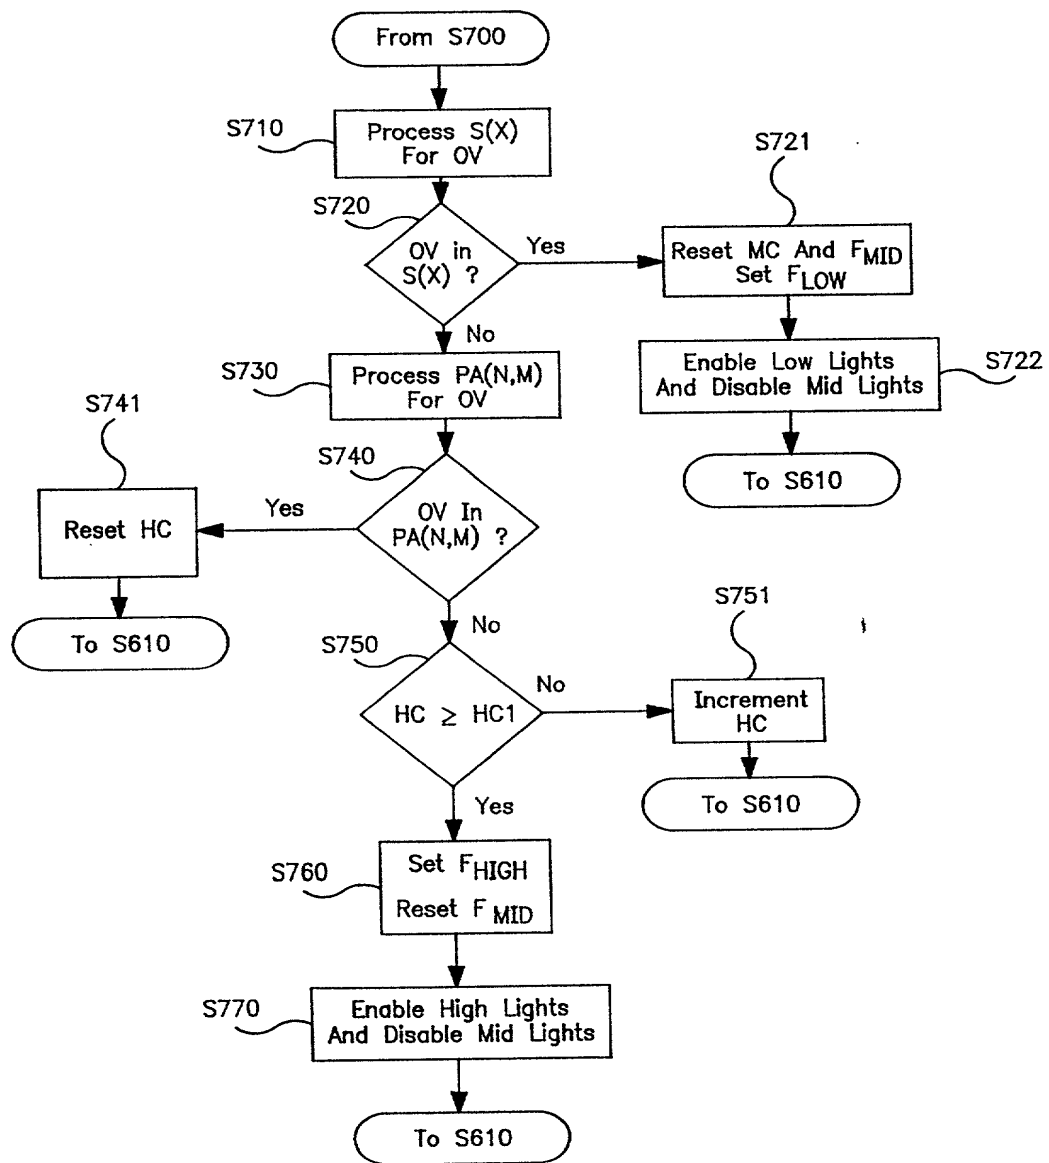


FIG. 13C

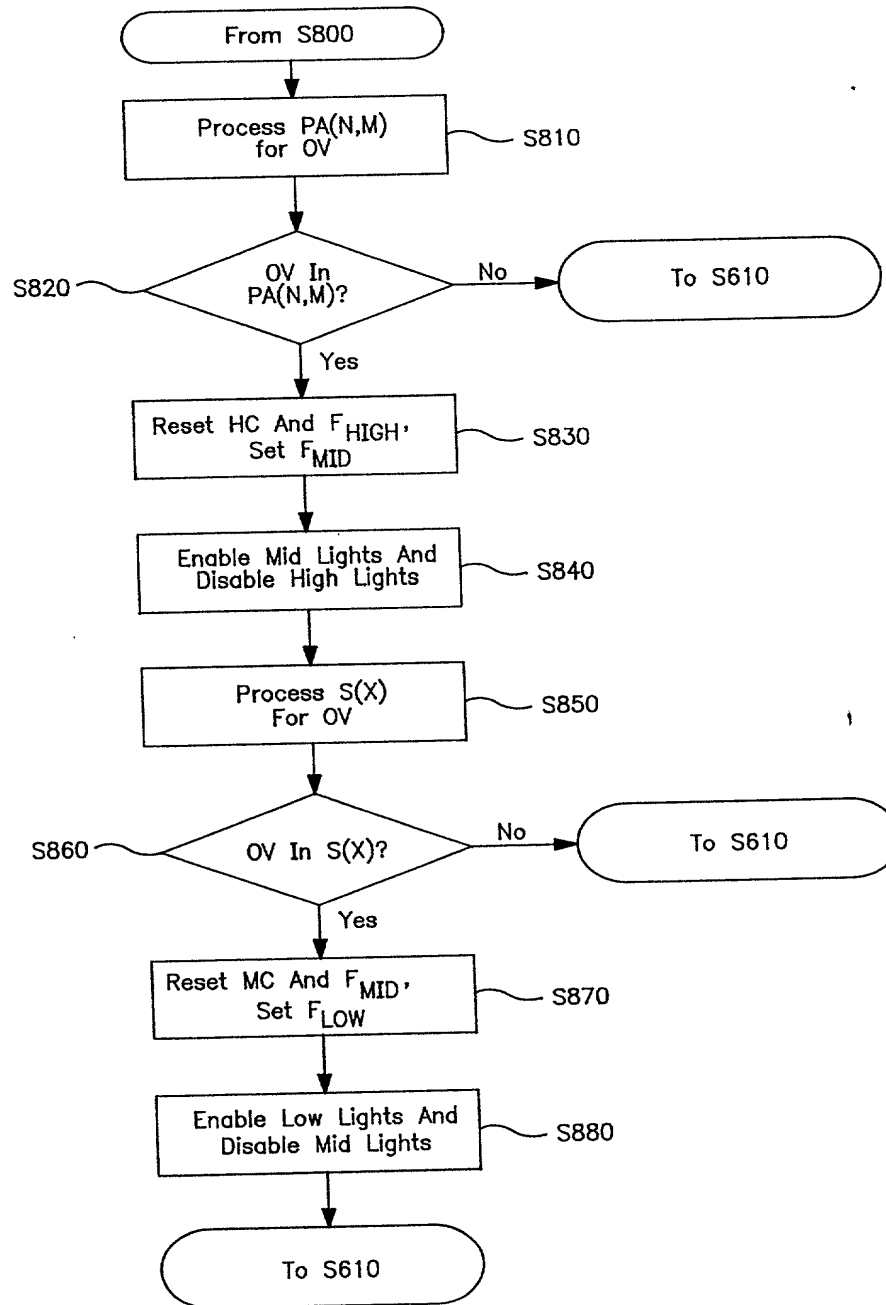


FIG. 13D

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 1)

690.2200 PCT/CIP

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled AUTOMATIC REARVIEW MIRROR, VEHICLE LIGHTING CONTROL AND VEHICLE INTERIOR MONITORING SYSTEM USING A PHOTSENSOR ARRAY

the specification of which ☐ is attached hereto ☒ was filed on June 7, 1994 as United States Application No. or PCT International Application No. 08/478,093 and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

<u>Country</u>	<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>(Yes/No)</u> <u>Priority Claimed</u>
----------------	------------------------	----------------------------	--

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>
------------------------	----------------------------

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

(Page 2)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 156 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

<u>Application No.</u>	<u>Filed (Day/Mo./Yr.)</u>	<u>Status</u> (Patented, Pending, Abandoned)
PCT/US94/01954	Feb. 25, 1994	Pending
08/023,918	Feb. 26, 1993	Pending

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Joseph M. Fitzpatrick (Registration No. 17,398), Lawrence F. Scinto (Registration No. 18,973), William J. Brunet (Registration No. 20,452), Robert L. Baechtold (Registration No. 20,860), John A. O'Brien (Registration No. 24,367), John A. Krause (Registration No. 24,613), Henry J. Renk (Registration No. 25,499), Peter Saxon (Registration No. 24,947), Anthony M. Zupcic (Registration No. 27,276), Charles P. Baker (Registration No. 26,702), Stevan J. Bosses (Registration No. 22,291), Edward E. Vassallo (Registration No. 29,117), Ronald A. Clayton (Registration No. 26,718), Lawrence A. Stahl (Registration No. 30,110), Laura A. Bauer (Registration No. 29,767), Leonard P. Diana (Registration No. 29,296), David M. Quinlan (Registration No. 26,641), Nicholas N. Kallas (Registration No. 31,530), William M. Wannisky (Registration No. 28,373), Lawrence S. Perry (Registration No. 31,865), Robert H. Fischer (Registration No. 30,051), Christopher Philip Wrist (Registration No. 32,078), Gary M. Jacobs (Registration No. 28,861), Michael K. O'Neill (Registration No. 32,622), Bruce C. Haas (Registration No. 32,734), Scott K. Reed (Registration No. 32,433), Scott D. Malpede (Registration No. 32,533), Fredrick M. Zullo (Registration No. 32,452), Richard P. Bauer (Registration No. 31,588), Warren E. Olsen (Registration No. 27,290), Abigail F. Cousins (Registration No. 29,292), Steven E. Warner (Registration No. 33,326), Thomas J. O'Connell (Registration No. 33,202), Penina Wollman (Registration No. 30,816), David L. Schaeffer (Registration No. 32,716), Jack S. Cubert (Registration No. 24,245), Mark A. Williamson (Registration No. 33,628), John T. Whelan (Registration No. 32,448), Jean K. Dudek (Registration No. 30,938), Raymond R. Mandra (Registration No. 34,382), Dominick A. Conde (Registration No. 33,856), Steven C. Bauman (Registration No. 33,832), Pasquale A. Razzano (Reg. No. 25,512), John W. Behringer (Registration No. 23,086), Robert C. Kline (Registration No. 17,739), Mark J. Itri (Registration No. 36,171), William C. Hwang (Registration No. 36,169), Michael P. Sandomato (Registration No. 35,345), Jack M. Arnold (Registration No. 25,823), John D. Carlin (Registration No. 37,292), Daniel S. Glueck (Registration No. 37,838), Victor J. Geraci (Registration No. 38,157), Joseph W. Ragusa (Registration No. 38,586), Brian L. Klock (Registration No. 36,570), Anne M. Maher (Registration No. 38,231), William J. Zak, Jr. (Registration No. 38,668), Thomas D. Pease (Registration No. 35,317), Bruce M. Wexler (Registration No. 35,409), and Robert S. Mayer (Registration No. 38,544).

Address all correspondence to:

FITZPATRICK, CELLA, HARPER & SCINTO
277 Park Avenue
New York, N.Y. 10172
Telephone No. (212) 758-2400

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 3)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor KENNETH SCHOFIELD

Inventor's signature Kenneth Schofield

Date 5th September 1995 Citizen/Subject of Great Britain

Residence 4793 Crestridge Court, Holland, Michigan 49423

Post Office Address _____

Full Name of Second Joint Inventor, if any MARK LARSON

Second Inventor's signature Mark Larson

Date September 5, 1995 Citizen/Subject of USA

Residence 13873 Oakwood Circle, Grand Haven, Michigan 49417

Post Office Address _____